

Application of Fenton reagent and adsorption as advanced treatment processes for removal of Maxilon Red GRL

Çiner F.*

Nigde Omer Halisdemir University, Department of Environmental Engineering, Nigde, 51240, Turkey

Received: 28/04/2017, Accepted: 25/08/2017, Available online: 01/12/2017

*to whom all correspondence should be addressed: e-mail: fciner@ohu.edu.tr

Abstract

In this paper, the removal of Maxilon Red GRL by adsorption onto raw soil sample known as Niğde (Bor) grape molasses soil and $\text{Fe}^{2+}/\text{H}_2\text{O}_2$ reagent as advanced treatment processes were investigated. The effects of various experimental parameters such as initial Fe^{2+} and H_2O_2 concentrations, pH, temperature, contact time, initial adsorbent dose, and initial dye concentration on adsorption and Fenton process efficiencies were studied in a batch reactor. The adsorption experimental data were modeled by Langmuir and Freundlich isotherm models. The data fitted well with the Langmuir isotherm ($R^2 > 0.99$). The optimum conditions had been determined and found that efficiency of decolorization obtained after 20 min of reaction, was about 99.4% for Fenton process.

Keywords: adsorption, advanced oxidation process, decolorization, Fenton process, maxilon red.

1. Introduction

Wastewater effluents from different industries such as textile, food processing, cosmetics, rubber and plastics contain various kinds of synthetic dyes (Chiou *et al.*, 2004). The textile industry is a water-consuming and heavily polluting industry (Jia *et al.*, 2017). Therefore, potentially releasing xenobiotics from washing and rinsing procedures during finishing processes (Lofrano *et al.*, 2016). The main sources of wastewater generated by the textile industry originate from dyeing and finishing operations (Şahinkaya, 2013; Kumari *et al.*, 2017). The dyeing wastewater is potentially toxic and poorly biodegradable, which results in a tremendous threat to aquatic organisms (Jia *et al.*, 2017). In this context, wastewater management receives a great deal of attention with various methods being proposed for discharge hazard estimation via ecotoxicological results (Libralato *et al.*, 2010). Textile wastewater is characterized by high chemical oxygen demand (COD), biological oxygen demand (BOD), alkalinity and total dissolved solids (TDS) (Hayat *et al.*, 2015). Among the different classes of textile dyes the basic ones have high brilliance and intensity of colors and are highly visible even in a very low concentration (Aksu, 2005). Disposal of dyes in precious water resources must be avoided and for that various treatment, technologies are in use (Gupta and Suhas,

2009). Various physical, chemical and biological methods such as adsorption, photolysis, chemical coagulation, chemical oxidation and reduction, electrochemical precipitation have also been used for the removal of dyes from wastewater in the past few decades (Hayat *et al.*, 2015; Jia *et al.*, 2017). However, all of these methods suffered with one or another limitation, and none of these were successful in removing color from the wastewater completely (Doğan *et al.*, 2009).

Adsorption occupies a prominent place and the use of inexpensive and one of the most efficient methods of removing pollutants from wastewater and provides an attractive alternative treatment, especially if the adsorbent is inexpensive and readily available (Gupta and Suhas, 2009; Karaoglu *et al.*, 2009). Adsorption on solid surface is being growing interest in this field because of its lower price (Nandi *et al.*, 2009). To lower the cost of wastewater treatment, many researchers have focused on finding the low-cost alternative adsorbents (Weng *et al.*, 2009).

Recently, AOPs have received considerable attention because it is possible to degrade organic compounds and color from wastewaters (Schrank *et al.*, 2007; Ertugay and Acar, 2017). The Fenton process is an extremely attractive option to degrade organic compounds present in wastewater due to the low-operating cost and low toxicity of the reagents. The oxidation process involves the reaction of Fe^{2+} salts with H_2O_2 to produce the radical $\cdot\text{OH}$, considered the second strongest oxidizing agent after fluorine, with a standard reduction potential of 2.8 V. In this case, Fe^{2+} ions act as a catalyst for the formation of the radical $\cdot\text{OH}$. Fenton's reaction occurs at pH values between 2 and 4, and the reaction products are carbon dioxide, water, and inorganic salts (Almazán-Sánchez *et al.*, 2014).

In the present study, the removal of Maxilon Red GRL (MR GRL) from aqueous solutions by adsorption onto raw soil sample known as Niğde (Bor) grape molasses soil and $\text{Fe}^{2+}/\text{H}_2\text{O}_2$ reagent as advanced treatment processes were studied. The effect of different parameters such as initial Fe^{2+} and H_2O_2 concentrations, pH, temperature, contact time, initial adsorbent dose, and initial dye concentration on adsorption and Fenton process efficiencies were investigated.

2. Materials and Methods

2.1. Materials

All chemicals used were of analytical grade and were used without further purifications. The basic dye was supplied from carpet industry in Niğde, Turkey. Stock solution of MR GRL dye contains 500 mg dye/L and was prepared by ultrapure distilled water. This stock solution was diluted in accurate proportions to produce solutions of different initial concentrations. The structure of the dye studied is shown in Fig. 1.

The raw soil sample known as Niğde (Bor) grape molasses soil was used for the adsorption of basic dye from aqueous solutions. This soil which consists of mostly calcite was used for sedimentation to make grape molasses. The solid sample was ground and sieved to 0.075-2 mm particle size.




Figure 1. Structure of MR GRL dye.

2.2. Analytical Methods

A calibration curve was achieved using the standard solutions of MR GRL basic dye with different concentrations in the range of 0.5–50 mg/L. The efficiency of the proposed process was evaluated by monitoring MR GRL removal after measuring absorbance at $\lambda_{max}=530$ nm. After sampling the reaction was continued. The dye removal efficiency of MR GRL was calculated as follows:

$$\% \text{ Dye removal} = \left(1 - \frac{C_t}{C_0}\right) 100 \quad (1)$$

where C_0 is the initial concentration of the MR GRL basic dye, and C_t is its concentration at reaction time t (min).

2.3. Fenton Experiments

The Fenton process experiments were conducted by using jar test method. The operating parameters included dosages of H_2O_2 and Fe^{2+} , pH value, temperature, initial dye concentration and oxidation time. Every beaker was first filled with 200 ml of dye wastewater sample, and the pH of the reaction mixture was adjusted by adding 1 N H_2SO_4 or 1 N NaOH solution and was measured by a pH-meter (InoLab-IDS Multi 940). The dye oxidation was achieved by Fenton's reagent which was composed of a mixture of $FeSO_4 \cdot 7H_2O$ and H_2O_2 36,5%, w/w). The necessary quantities of Fe^{2+} and H_2O_2 were added simultaneously in the dye solution and the process was proceeded with rapid mixing of wastewater sample at 150 rpm for 2 min, slow mixing at 30 rpm for 20 min, and then maintaining standstill for 30 min. The supernatant samples were filtered 0.45 μm filter paper and analysed for color analyses.

2.4. Batch Adsorption Experiments

Batch adsorption experiments were carried out 100 ml capacity of erlenmeyer with 50 ml of dye solution for different contact times by using shaker. The effects of pH (2 to 10), initial dye concentration (5-100 mg/l), amount of grape molasses soil (1-15 g/L), contact time (0-1440 min) were performed onto adsorption efficiency. The suspensions were mixed at 150 min at constant temperature (30 °C) in a shaker at 150 rpm until equilibrium was reached. The pH of the solutions was adjusted to the required value by adding either 1 N H_2SO_4 or 1 N NaOH solution.

After equilibrium, the final concentration (C_e) was measured using absorbance values with a Hach-Lange Model spectrophotometer and compared with the absorbance value of the initial solutions (C_0) The absorbance was measured at 530 nm. The amount of dye adsorption per unit mass of grape molasses soil at equilibrium q_e (mg/g) was calculated by the following equation:

$$q_e = \frac{(C_0 - C_e)V}{W} \quad (2)$$

where V is the volume of the dye solution (mL) and W is the weight of adsorbent (g) added to volume V .

3. Results and Discussion

3.1. Fenton Experiments

The pH of the solution is a very important parameter for Fenton process, which controls the production rate of hydroxyl radical and the concentration of Fe^{2+} . Fig. 2 demonstrates the pH effect on the color removal of MR GRL by Fenton oxidation with a fixed amount of 100 mg/L MR GRL, 100 mg/L Fe^{2+} and 200 mg/L H_2O_2 .

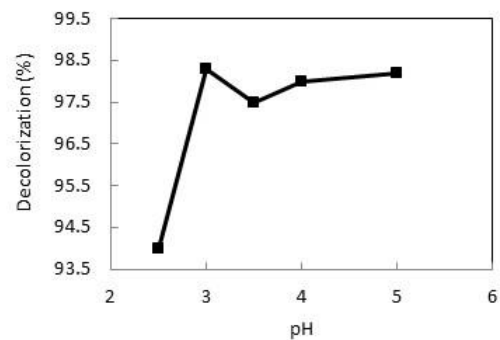


Figure 2. Effect of pH on decolorization of MR GRL during Fenton oxidation treatment.

Reaction conditions: $[H_2O_2]_0=200$ mg/L, $[Fe^{2+}]_0=100$ mg/L, $[Dye]_0=100$ mg/L, $t=20$ min, and temperature= 25 ± 1 °C

To find the optimal pH of reaction mixture, a series of experiments were conducted at different pH values 2.0, 3.0, 3.5, 4.0 and 5.0. The results indicated that the degradation of MR GRL was significantly influenced by the pH of the solution and the optimal solution pH is about 3.0 giving a yield equal to 98.3%. These results agree with

several studies already carried out (Bousla *et al.*, 2010). The color removal efficiency increases from 94.4 to 98.3% as a consequence of the pH value increase from 2.0 to 3.0 within 20 min.

To see the role of initial concentration of Fe^{2+} on the yield of MR GRL decolorization by the Fenton process and to determine the most appropriate concentration of Fe^{2+} , a series of experiments were conducted with different concentrations of $[\text{Fe}^{2+}]_0$ from 50 to 150 mg/L. The results obtained are presented in Fig. 3 and the highest decolorization efficiency (98%) was recorded at $[\text{Fe}^{2+}]_0$ value of 150 mg/L and 20 min reaction time. Many researchers have reported that the use of a much higher concentration of Fe^{2+} could lead to the self-scavenging of OH^{\bullet} radical by converting it to hydroxyl ions during oxidation of Fe^{2+} (Hameed and Lee, 2009).

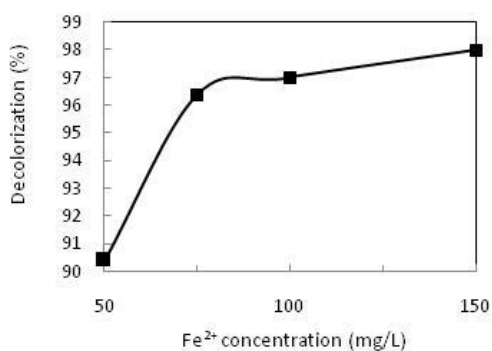


Figure 3. Effect of Fe^{2+} concentration on decolorization of MR GRL during Fenton oxidation treatment.

Reaction conditions: $[\text{H}_2\text{O}_2]_0=200$ mg/L, $[\text{Dye}]_0=100$ mg/L, $\text{pH}=3.0$, $t=20$ min, and temperature= 25 ± 1 °C

Oxidation of dyes by the Fenton process is carried out by OH^{\bullet} radicals that are directly produced from reaction between H_2O_2 that plays the role of an oxidizing agent and Fe^{2+} .

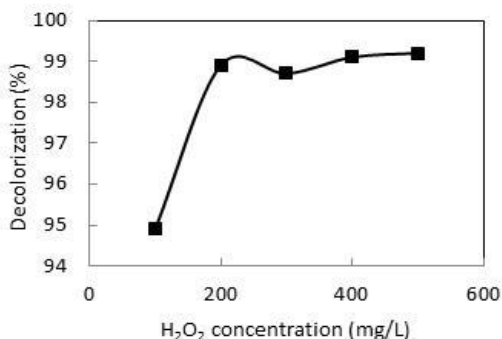


Figure 4. Effect of H_2O_2 concentration on decolorization of MR GRL during Fenton oxidation treatment. Reaction conditions: $[\text{Fe}^{2+}]_0=150$ mg/L, $[\text{Dye}]_0=100$ mg/L, $\text{pH}=3.0$, $t=20$ min, and temperature= 25 ± 1 °C

To determine the concentration of H_2O_2 giving the maximum MR GRL decolorization efficiency, experiments were conducted, and results obtained are represented in Fig.4. The decolorization efficiency increased from 94.9 to 99% because of increasing H_2O_2 dosage from 100 to 500 mg/L at 20 min. This can be explained by the effect of OH^{\bullet} radicals produced additionally (Hameed and Lee, 2009).

The study of the initial concentration effect of MR GRL dye on the efficiency of the decolorization was conducted from concentration of 50 mg/L to 500 mg/L, while maintaining pH, $[\text{Fe}^{2+}]_0$, $[\text{H}_2\text{O}_2]_0$, reaction time and temperature constant at 3.0, 150, 200 mg/L, 20 min and 25 ± 1 °C, respectively. Fig.5, shows the effect of $[\text{dye}]_0$ on its decolorization by Fenton process.

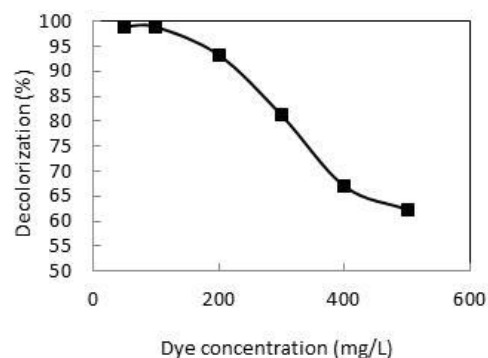


Figure 5. Effect of initial dye concentration on decolorization of MR GRL during Fenton oxidation treatment. Reaction conditions: $[\text{Fe}^{2+}]_0=150$ mg/L, $[\text{H}_2\text{O}_2]_0=200$ mg/L, $\text{pH}=3.0$, $t=20$ min, and temperature= 25 ± 1 °C

The reaction time was varied between 5 and 60 min. The initial pH, the H_2O_2 dose, the Fe^{2+} dose and the initial MR GRL were kept constant at 3, 200, 150 and 100 mg/L, respectively. The optimum reaction time was determined to be 20 min. In 20 min, the supplied H_2O_2 was probably almost completely consumed as shown in Fig. 6.

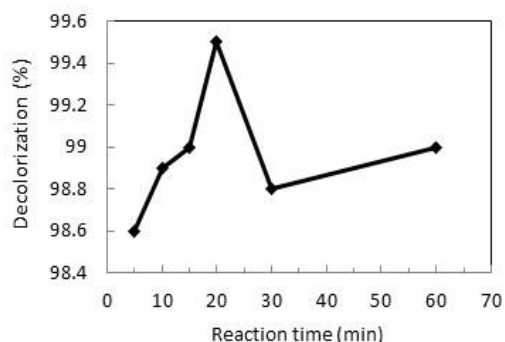


Figure 6. Effect of reaction time on decolorization of MR GRL during Fenton oxidation treatment. Reaction conditions: $[\text{Fe}^{2+}]_0=150$ mg/L, $[\text{H}_2\text{O}_2]_0=200$ mg/L, $\text{pH}=3.0$, and temperature= 25 ± 1 °C

Temperature affects the reaction between H_2O_2 and Fe^{2+} and therefore, it should influence the kinetics of dyes

decolorization (Bouasla *et al.*, 2010). Experiments were performed by varying the temperature from 25 to 50 °C. From Fig. 7, it can be seen that decolorization efficiency of MR GRL determined from 98.8 to 99% because of increasing temperature within 20 min of reaction time.

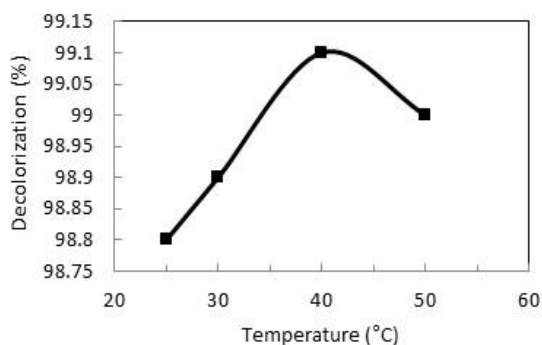


Figure 7. Effect of temperature on decolorization of MR GRL during Fenton oxidation treatment. Reaction conditions: $[Fe^{2+}]_0=150$ mg/L, $[H_2O_2]_0=200$ mg/L, pH=3.0.

3.2. Batch Adsorption Experiments

The initial pH of the aqueous solution plays an important role in the adsorption capacity (El-Sayed *et al.*, 2013). The effect of initial pH on removal of MR GRL from aqueous solutions was investigated by varying the pH range of 2.0-10.0 at 30 °C temperature for 150 min contact time. In this study, pH did not importantly effect the dye removal and adsorption capacity (Fig. 8). Therefore, all adsorption experiments were performed at natural pH of dye solutions.

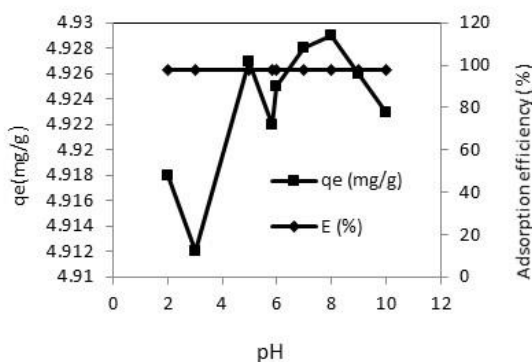


Figure 8. Effect of pH on MR GRL adsorption capacity. Experimental conditions: $[Dye]_0=50$ mg/L, $[Adsorbent]_0=10$ g/L, $t=150$ min.

In order to study the effect of adsorbent dose on dye removal by grape molasses soil was performed in a range of 1-15 g/L under the conditions specified and the results are given for removal efficiency (%) and the amount of removed per unit weight of adsorbent (qe) in Fig. 9. An increase in the adsorbent dose from 1 to 15 g/L resulted in a decrease of the qe from 19.4 to 3.2 (mg/g).

The effect of initial dye concentration on the percentage color removal of the dye was investigated at different initial dye concentrations 5, 10, 20, 30, 40, 60, and 100 mg/L using optimum pH and adsorbent dose. Results show that increased initial MR GRL concentration led to increased MR GRL adsorption (Fig. 10).

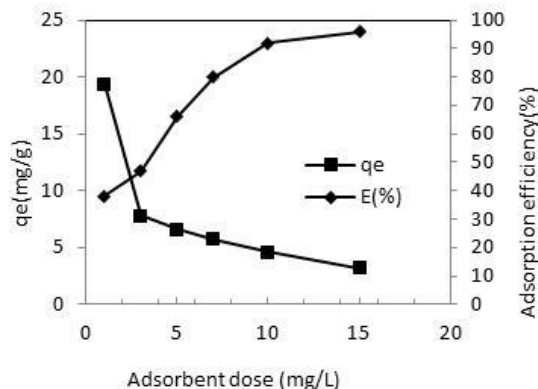


Figure 9. Effect of adsorbent dose on MR GRL adsorption capacity. Experimental conditions: $[Dye]_0=50$ mg/L, $t=150$ min

As shown in Fig. 10, the removal rate reduces with increasing concentration of MR GRL. Apparently, the initial MR GRL concentration plays an important role in affecting the capacity of MR GRL to absorb onto grape molasses soil.

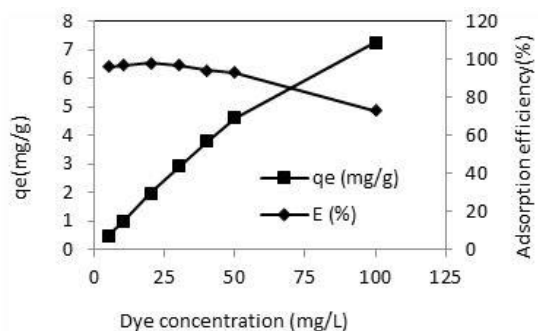


Figure 10. Effect of dye concentration on MR GRL adsorption capacity.

Experimental conditions: $[Adsorbent]_0=10$ g/L, $t=150$ min

The effect of contact time ranges 0-1440 min on the adsorption of MR GRL by the grape molasses soil is shown in Fig. 11. Based on these results, the extent of removal of MR GRL by adsorbent was found to increase reach a maximum value with increase in contact time, after 120 min.

Particle size of an adsorbent played a very important role in the adsorption capacity of dye (Aljeboree *et al.*, 2014). In order to the effect of particle size of adsorbent on the adsorption of MR GRL, adsorbent dose fixed at 10 g/L with particle size in the range 0.075-2 mm was added to dye solutions and the results are given for removal efficiency (%) in Fig. 12. It shows minimum particle size showed greater adsorption than larger size. Small size of adsorbent

increases the surface area for adsorption (Rehman *et al.*, 2013).

According to Fig. 12, the dye removal efficiency was obtained above 90 % at 10 g/L adsorbent dose, 50 mg/L dye concentration and particle size of < 0.075 mm.

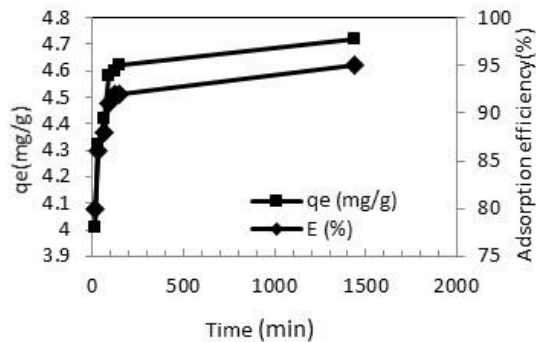


Figure 11. Effect of contact time on MR GRL adsorption capacity.

Experimental conditions: [Dye]₀=50 mg/L, [Adsorbent]₀=10 g/L.

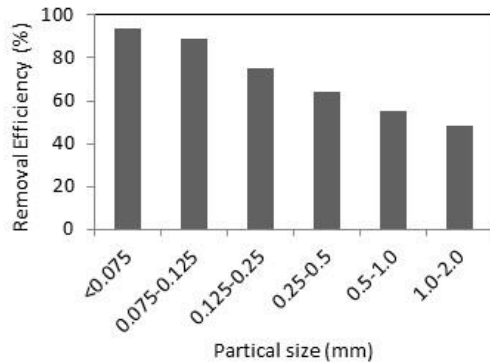


Figure 12. Effect of particle size on MR GRL

Experimental conditions: [Dye]₀=50 mg/L, [Adsorbent]₀=10 g/L, T=30 °C, t=150 min.

Adsorption experiments were carried out for 50 mL dye solution containing 50 mg/L at different temperatures 25, 30, and 40 °C using 10 g/L of adsorbent in order to follow the effect of temperature on the adsorption of MR GRL (Fig. 13)

In Fig. 13, the results showed that removal efficiencies of initial dye concentration were not changed as temperature from 25 to 40 °C.

The adsorption data were analyzed using adsorption isotherm models, Langmuir and Freundlich. The linearized MR GRL Langmuir and Freundlich adsorption isotherms at different initial dye concentration (5, 10, 20, 30, 40, 50, 100 mg/L), at natural pH of dye solution, temperature 30 °C, and 10 g/L adsorbent dose were used to determine the adsorption capacity of grape molasses soil for MR GRL. The adsorption constant evaluated from the isotherms with correlation coefficients are shown in Table 1. The maximum capacity Q_0 determined from the Langmuir isotherm defines the total capacity of the grape molasses soil for the dye as 7.686 mg/g adsorbent. The fact that, compared to Freundlich isotherm, the Langmuir isotherm

fits the experimental data due to the homogeneous distribution of active sites on the surface of adsorbent.

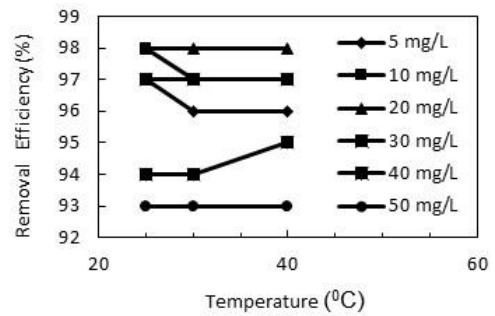


Figure 13. Effect of temperature on MR GRL. Experimental conditions: [Dye]₀=50 mg/L, [Adsorbent]₀=10 g/L, t=150 min.

The Langmuir model is based on the assumption that maximum adsorption corresponds to a saturated monolayer of solute molecules on the adsorbent surface (El-Sayed *et al.*, 2013).

4. Conclusions

In this study, the removal of MR GRL from aqueous solutions by adsorption onto raw soil sample known as Niğde (Bor) grape molasses soil and Fe⁺²/H₂O₂ reagent as advanced treatment processes were studied. The dye removal efficiency was obtained above 90 % at 10 g/L adsorbent dosage, 50 mg/L dye concentration, 30 °C temperature and particle size of < 0.075 mm, respectively. The results show that grape molasses soil could be used as an effective and low cost material for removal of dyes and color from aqueous solution. The equilibrium data were fitted by the Langmuir and Freundlich isotherm models where the data were slightly better fitted by the Langmuir model for the MR GRL in terms of regression values ($R^2 > 0.99$) and the maximum adsorptive quantity of MR GRL was 7.686 mg/g.

The examined Fenton process was found very efficient for removing MR GRL from aqueous solutions. The optimal operation parameters were: 3.0, 200, 150, 100 mg/L, 20 min and 30 °C for pH, [H₂O₂]₀, [Fe⁺²]₀, [MR]₀, reaction time and temperature, respectively. Under these conditions, 99.4% decolorization efficiency of MR GRL was found in aqueous solution after 20 min of reaction.

Table 1. Adsorption isotherm parameters for the MR GRL dye solutions

Freundlich	K _f	n	R ²
	0.114	0.413	0.903
Langmuir	Q ₀ (mg/g)	b(L/mg)	R ²
	7.686	0.535	0.995

Acknowledgments

The author thanks to Sena Şahin and Merve Uncuoğlu for their contributions during experimental studies.

References

- Aksu Z. (2005), Application of biosorption for the removal of organic pollutants: a review, *Process Biochem.*, **40**, 997-1026.
- Aljeboree A.M., Alshirifi A.N. and Alkaim A.F. (2014), Kinetics and equilibrium study for the adsorption of textile dyes on coconut shell activated carbon, *Arabian J. Chem.*, <http://dx.doi.org/10.1016/j.arabjc.2014.01.020>(in press).
- Almazán-Sánchez P.T., Linares-Hernández P.T., Martínez-Miranda V., Lugo-Lugo V. and Fonseca-Montes de Oca R.M.G. (2014), Wastewater treatment of methyl methacrylate (MMA) by Fenton's reagent and adsorption, *Cataly. Today*, **220-222**, 39-48.
- Bouasla C., El-Hadi Samar M. and Ismail, F. (2010), Degradation of methyl violet 6B dye by the Fenton process, *Desalination*, **254**, 35-41.
- Chiou M.S., Ho P.Y. and Li H.Y. (2004), Adsorption of anionic dyes in acid solutions using chemically cross-linked chitosan beads, *Dye Pigm.*, **60**, 69–84.
- Daud N.K., Akpan U.G. and Hameed B.H. (2012), Decolorization of Sunzol Black DN concentration in aqueous solution by Fenton oxidation process: effect of system parameters and kinetic study, *Des. and Wat. Treat.*, **37**, 1–7.
- Doğan M., Karaoğlu M.H. and Alkan M. (2009), Adsorption kinetics of maxilon yellow 4GL and maxilon red GRL dyes on kaolinite, *J. Hazard. Mat.*, **165**, 1142-1151.
- El-Sayed G.O., Mohammed T.Y. and Abd-Allah Salama A. (2013), Batch adsorption of Maxilon Red GRL from aqueous solution by natural sugarcane stalks, *Hindawi Pub.Corp.ISRN Environ. Chem.*, Article ID 514154, 1-8.
- Ertugay N. and Acar F.N. (2017), Removal of COD and color from Direct Blue 71 azo dye wastewater by Fenton's oxidation: Kinetic study, *Arabian J. Chem.*, **10**, S1158-S1163.
- Gupta V.K. and Suhas P.A.M. (2009), Application of low-cost adsorbents for dye removal—a review, *J. Environ. Manage.*, **90**, 2313-2342.
- Hameed B.H. and Lee T.W. (2009), Degradation of malachite green in aqueous solution by Fenton process, *J. Hazard. Mat.*, **164**, 468-472.
- Hayat H., Mahmood Q., Pervez A., Bhatti Z.A. and Baig S.A. (2015), Comparative decolorization of dyes in textile wastewater using biological and chemical treatment, *Sep. and Pur. Techn.*, **154**, 149–153.
- Jia Z., Li Z., Ni T. and Li S. (2017), Adsorption of low-cost absorption materials based on biomass (*Cortaderia selloana* flower spikes) for dye removal: Kinetics, isotherms and thermodynamic studies, *J. Molec. Liq.*, **229**, 285-292.
- Karaoğlu H.M., Doğan M. and Alkan M. (2009), Removal of cationic dyes by kaolinite, *Mic. and Mes. Mat.*, **122**, 20–27.
- Kumaria H.J., Krishnamoorthy P., Arumugam T.K., Radhakrishnan S. and Vasudevan D. (2017), An efficient removal of crystal violet dye from waste water by adsorption onto TLAC/Chitosan composite: A novel low cost adsorbent, *Int. J. Bio. Mac.*, **96**, 324-333.
- Libralato G., Volpi Ghirardini A. and Avezú F. (2010), How toxic is toxic? A proposal for wastewater toxicity hazard assessment, *Ecotoxic. and Environ. Safety*, **73**, 1602-1611.
- Lofrano G., Libralato G., Carotenuto M., Guida M., Inglese M., Siciliano A. and Meriç S. (2016), Emerging concern from short-term textile leaching: a preliminary ecotoxicological survey, *Bull. Environ. Contam. Toxicol.*, **97**(5), 646–652.
- Nandi B.K., Goswami A. and Purkait M.K. (2009), Adsorption characteristics of brilliant green dye on kaolin, *J. Hazard. Mat.*, **161**, 387–395.
- Rehman M.S., Munir M., Ashfaq M., Rashid N., Nazar M.F., Danish M. and Han J. (2013), Adsorption of brilliant green dye from aqueous solution onto red clay, *Chem. Eng. J.*, **228**, 54-62.
- Schrank S.G., Santos J.N.R., Souza D.S. and Souza E.E.S. (2007), Decolourisation effects of Vat Green 01 textile dye and textile wastewater using H₂O₂/UV process, *J. Photochem. Photobiol. A: Chem.*, **186**, 125–129.
- Şahinkaya S. (2013), COD and color removal from synthetic textile wastewater by ultrasound assisted electro-Fenton oxidation process, *J. Ind. & Eng. Chem.*, **19**(2), 601-605.
- Weng C.H., Lin Y.T. and Tzeng T.W. (2009), Removal of methylene blue from aqueous solution by adsorption onto pineapple leaf powder, *J. Hazard. Mat.*, **170**, 417-424.