

A preliminary effort to reduce carcinogenic polycyclic aromatic hydrocarbons from diesel exhaust by using different blends of diesel and synthesized biodiesel

Kumar V.^{1,*}, Vikas P.², Saruchi³, Sharma R.², Masih A. and Kothiyal N.C.⁵

¹ECL, Department of Applied Sciences, CT Group of Institutions, Jalandhar, Punjab, India

²Department of Bio Technology, DAV University, Jalandhar, Punjab

³NIMS, University of Rajasthan, India

⁴ERL, Department of Chemistry, St. Andrew's College, Gorakhpur, India

⁵ Department of Chemistry, Dr. BRA, NIT Jalandhar, Punjab, 144011

Received: 14/12/2017, Accepted: 14/04/2018, Available online: 06/08/2018

*to whom all correspondence should be addressed: e-mail: vaneet2106@gmail.com

Abstract

In the present investigation an attempt for the reduction of six hazardous air Pollutants (HAPs) from diesel exhaust by different blends of diesel and biodiesel has been made. The synthesis of biodiesel has been done from Jatropha, Linseed Castor and Karanja oils which are commonly used in the Indian market. Blending of diesel with biodiesel was done in different ratios (20 to 40 %) for the estimation of carcinogenic HAPs from the exhaust of a Honda engine (EBK 2010AC Model). The order of HAPs emission from engine exhaust by using diverse blends were Diesel>Jatropha-diesel>Linseed-diesel>Castor-diesel>Karanja-diesel. The maximum reduction of HAPs was established in the following ratio 40% (Biodiesel):60% (Diesel). B(a)P and Chrysene were the two individual aromatic hydrocarbons (AHCs) found in higher concentration in almost all blending fuels, ranging between 50 ng/ μ l to 101.1 ng/ μ l. The emission of almost all AHCs reduces by Blending of Diesel with Biodiesel. This was the first comprehensive information which showed the reduction of carcinogenic pollutants from diesel exhaust.

Keywords: HAPs, AHCs, Diesel, Biodiesel, Carcinogenicity.


1. Introduction

Hazardous air pollutants (HAPs) established a broad family of compounds that are sometimes designated as mono and polycyclic organic compounds. This term refers to the fact that HAPs are distributed among gas and particle phases (Baek *et al.*, 1991; Benner *et al.*, 1989). The range of their vapor pressures is revealed to the fact that, at

equilibrium and ambient temperature, mono aromatic hydrocarbons like benzene, toluene, xylene as well as two-ring hydrocarbons like naphthalene exists almost completely in the gas phase, whereas five ring and higher polycyclic aromatic hydrocarbons (PAHs) are mainly adsorbed on particulate matters. The intermediate of three- and four-ring PAHs are distributed between the two phases. However, the gaseous concentrations of these intermediate PAHs can be considerably reduced by their adsorption and absorption on various types of surfaces (Caricchia *et al.*, 1999; Kauppinen, 2001). Because of this phenomenon, the amount and type of particulate matter play a significant role, together with temperature, in the vapor-particle partitioning of semi volatile organic compounds.

Motor vehicles are one of the utmost common modes of transportation in numerous countries around the world (Satyarthi *et al.*, 2009; Masih and Taneja, 2006). Some south Asian countries also falls into the same category where we have over one million buses which account for 17% of all the motor vehicles. The health risk associated with high number of motor vehicles in these countries is both significant and alarming. HAPs, including polycyclic as well as mono aromatic hydrocarbons (AHCs), were designated as the target compounds in learning for their carcinogenicity. An increased incidence of lung tumours, some of which were diagnosed as malignant, was detected in some studies with rats following exposure for two or more years to high levels of diesel exhaust emission. Studies with laboratory animals exposed to diesel exhaust and known carcinogens advice that exposure to diesel exhaust augments the effect of the known carcinogens (McClellan, 1987). Thus, study of diesel-exhaust-induced carcinogenicity must be involved in addition to lung DNA adduct formation (Bond, 1990).

Literature survey indicates (Kumar *et al.*, 2015) that inadequate research work has been done on air contamination and distribution behavior of AHCs in fast

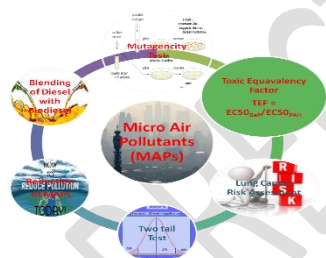

rising cities of India, where vehicles (cars, trucks, buses and two, three wheeler) as old as one to twenty years ply on the same roads. Lack of maintenance, poor planning, socio economic condition and slow pace of infrastructure development in developing country has multiplied the pollution problem further. Smaller vehicles (two, three and four wheelers) run principally on petrol and diesel fuels are major supplier of AHCs in the city atmosphere (Kumar *et al.*, 2014). The increasing ultimatum of fossil fuels over the past decades due to urbanization, industrial development, increase in population and vehicular traffic has caused an escalation in the emission of AHCs to the atmosphere (Kumar and Kothiyal, 2012). To our acquaintance, there is no literature available on reduction of the particulate and AHCs emission from engine exhaust in India as well as abroad. The health risk linked with this high number of motor vehicles in countries is noteworthy and alarming.

This study targets to synthesize biodiesel from various oils available in local market. Blending of diesel with biodiesel was also done in diverse ratios for the estimation and reduction of carcinogenic AHCs (Kumar and Kothiyal, 2014). Biodiesel samples were synthesized in our lab from different raw materials and analyzed for AHCs concentration in exhaust of a Honda engine (EBK 2013AC Model) on standing mode.

2. Materials and Methods

2.1 Synthesis of Biodiesel

Biodiesel samples were synthesized indigenously in our laboratory using Jetrofa, Linseed, Castor and Karanja oil as raw materials procured from the local market.

2.1.1 Catalyst Preparation

A series of lithium ion impregnated CaO (Li/CaO) catalyst was prepared by following the wet chemical method reported earlier (Abebe *et al.*, 2011). In a typical preparation, 10g of calcium oxide was suspended in 40 mL of deionized water, and to this 10 mL aqueous solution of Li_2CO_3 of desired concentration was added to obtain 0.5-5 wt% Li in CaO. The resulted slurry was stirred for 2 hours at room temperature (30 °C) and finally dehydrated at 120 °C in oven for 24 hours. The prepared catalysts were designated as x-Li/CaO, where x represents the wt% of lithium in CaO.

2.1.2 Trans-esterification of waste cottonseed oil

All transesterification reactions for biodiesel synthesis were carried out in 250 ml, three necked round bottom flask equipped with water cooled reflux condenser, thermometer, oil bath and a magnetic stirrer. In a typical run, the flask was charged with 10 ml vegetable oil, desired molar concentrations of ethanol and desired amount of catalyst. To monitor the progress of the reaction, the aliquots were collected from the reaction

mixture after every 15 min with the help of glass capillary and exposed to the NMR and GC-MS studies. After the accomplishment of the reaction, the solid catalyst was removed from the reaction mixture by filtration. The liquid phase was kept in separating funnel for 24 hours to separate the lower glycerol layer from the upper FAEs layer. The extra ethanol from the later was recovered with the help of rotary evaporator. FAEs, thus obtained, were further characterized and quantified by ^1H NMR and GC-MS techniques. Waste cotton seed oil derived FAEs ^1H NMR (CDCl_3 , δ ppm): 5.3 (m, $-\text{CH}=\text{CH}-$), 4.2 (q, $-\text{OCH}_2\text{CH}_3$), 2.7 (m, $-\text{CH}=\text{CH}-\text{CH}_2-\text{CH}=\text{CH}-$), 2.3 (m, $-\text{CH}_2-\text{CO}-$), 2.0 (m, $-\text{CH}_2-\text{CH}=\text{CH}-$), 1.6–1.25 (m, $-(\text{CH}_2)_n-$), 0.95 (m, $-\text{CH}=\text{CH}-\text{CH}_3$), 0.87 (m, $-\text{CH}_2-\text{CH}_3$).

2.2 Chemicals

HPLC grade reagents, solvents and standards used in the study were procured from Merck specialty Chemicals, Pvt. Ltd. Mumbai, India. AHCs standards used in GC studies were procured from Dr Ehrenstorfer GmbH Chemicals, Merck, Germany Pvt. Ltd.

2.3 Glasswares

All glassware's of Borosil make glass (A grade) were used in the study. Glassware's were dipped in dilute Nitric acid and washed with plain and double distilled water every time before use

2.4 Sampling site description

Punjab is one of the prospering and fast budding states of India. Jalandhar, one of the major intensifying cities sited at the centre of Punjab between Beas and Sutlej rivers. The city, which has key road and rail connections, is a market for agricultural, textile, leather goods, wood products, hand tools and sports material. Jalandhar is located at 71° 31' East and 30° 33' North at a distance of 146 kilometers from state capital Chandigarh on Delhi-Amritsar National Highway (grand trunk road). According to 2011 Census (provisional), the area of Jalandhar district is 3,401 sq.km and total population of the district was 2,753,508 persons (Kumar and Kothiyal, 2011b). The city has shown spectacular growth in terms of population, infrastructure and traffic thickness during last few years. The weather of this district is on the whole dry except during the brief south-west monsoon season (July to September). The average annual rainfall in the district is 703.0 mm (Kumar and Kothiyal, 2014a). The monitoring station was situated at National Institute of Technology Jalandhar (NIT) gate on Amritsar-New Delhi National Highway in the outskirts of the city with large open area on both side of the road. The traffic pace was much fast but density was low at this site (with majority of heavy vehicle i.e., truck car and buses). The traffic volume of the station was high (around 50,000 vehicles daily) with majority of two, three and four wheelers. Figure 1 shows the map of Jalandhar representing sampling site.

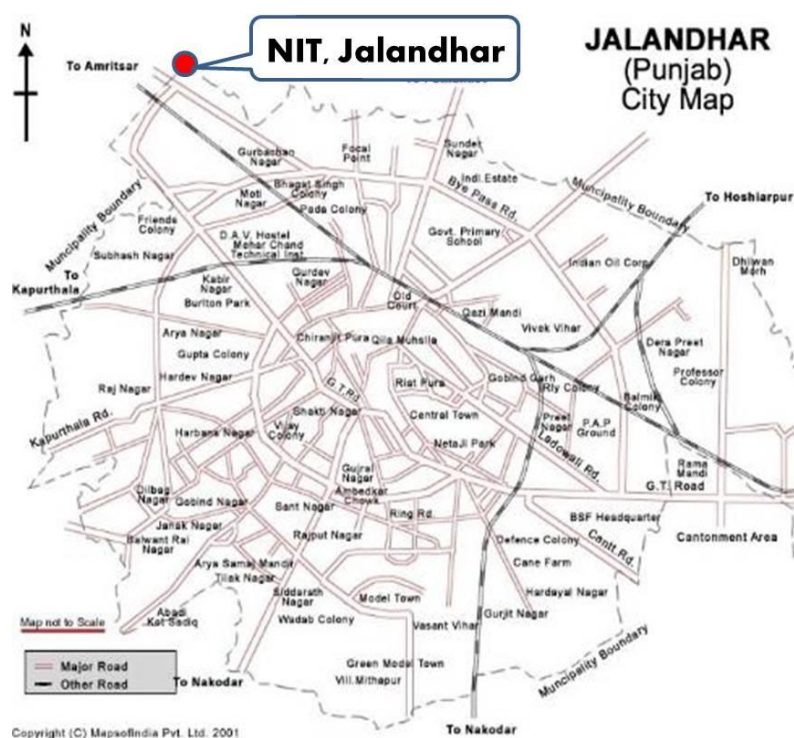


Figure 1. Map of Jalandhar showing sampling site

2.5 Sampling Method

The samples were collected as per Method TO-15A (USEPA, 2009). Sampling was done with high volume sampler Model APM-411 (Envirotech Instruments Pvt. Ltd. New Delhi). Exhaust pipe from Honda engine exhaust was left at the canopy of High volume sampler. High volume sampler collects the particulate matters in the size range 100-0.01 μm . The glass microfibre filter paper GF/A (20.3 \times 25.4 cm) were used for sampling. Before fitting the filter paper in the instrument, it was dehydrated in hot oven at 40 $^{\circ}\text{C}$ for 1 hour. The exhaust samples were drawn in a laminar flow at the rate 1-1.2 m^3/min . The airborne particles comprising AHCs adsorbed on it were collected for 9- 10 hours (during peak traffic density hours) on filter paper. Vapor phase (low molecular weight) AHCs were

trapped by means of glass microfibre filter paper followed by Polyurethane Foam (PUF) fixed just below the filter paper in a cartridge. Filter paper and PUF was removed from the machine and preserved in a vacuum desiccator stored in dark till analysis. Sampling period was 9.5 hours. A total of 12 samples were collected for analysis as follow: Jatropa:Diesel (20:80), Jatropa:Diesel (30:70), Jatropa:Diesel (40:60), Linseed:Diesel (20:80), Linseed:Diesel (30:70), Linseed:Diesel (40:60), Castor:Diesel (20:80), Casor:Diesel (30:70), Castor:Diesel (40:60), Karanza:Diesel (20:80), Karanza:Diesel (30:70), Karanza:Diesel (40:60). Weather condition during the sampling period are given in the table 6. Sample were collected and analyzed in between the month of March and April 2017.

Table 6. Meteorological parameters and SPM concentration of sampling sites for the period May 2016 to April 2017

Sr. No.	Month	Average Temperature ^a ($^{\circ}\text{C}$)	Relative wind speed ^a (Km/h)	Relative Humidity ^a (%)	Average SPM ^a ($\mu\text{g}/\text{m}^3$)
1	May	30.11	6.11	28.11	399
2	June	36.51	13.11	32.21	457
3	July	37.71	9.01	51.10	459
4	August	35.52	12.11	53.01	497
5	September	32.11	8.11	67.12	199
6	October	29.91	8.02	66.22	195
7	November	28.21	6.01	53.10	355
8	December	22.01	5.04	57.08	422
9	January	19.21	5.24	56.84	589
10	February	15.11	5.20	65.51	319
11	March	18.50	6.82	59.05	335
12	April	21.61	11.17	47.54	318

^a Source: Punjab Meteorological Department (PMD), Jalandhar, India.

2.6 Extraction and analysis

AHCs both adsorbed on particulate and semi volatile phase were extracted from filter paper and PUF using soxhlet extractor in toluene for 20 to 24 hours at the rate of 3 cycles per hour. Toluene was used instead of other solvents (like benzene/methanol, dichloro methane (DCM), etc.) due to its high recovery, especially for higher boiling AHCs (Kumar *et al.*, 2014). Combined extract of filter paper and PUF was concentrated to 1ml volume in rotary flash evaporator at 60^o C under gentle vacuum. Temperature of the water bath was kept below 40^o C to rule out any possibility of breakdown. The extract was transferred to a 10 ml volumetric flask and then the volume was adjusted to 10 ml with hexane. Impurities were removed by liquid-solid chromatography using silica gel (70-230 mesh) activated at 250 °C for 24 hours. The silica gel slurry in hexane was packed as a glass column (0.6 cm internal diameter). The concentrated extract was transferred to the top of the column and eluted with 10 ml of hexane followed by 20 ml of 1:1 solution of toluene and hexane. The eluate thus obtained was evaporated nearly to dryness using the rotavapor below 40 °C. The reduced volume of sample was dissolved in HPLC grade toluene before injecting in gas chromatograph (USEPA, 2009). The sample was kept preserved in an amber colour sample tubes in refrigerator at below 4 °C till analysis. The exhaust samples were examined on Nucon make microprocessor based Gas Chromatograph, (Model No 5765) on RH – 5 capillary column (30 meter length, 0.53 ID X 3.0 µm) using Flame Ionization Detector. The injection and detector temperature were kept 280 °C and 300 °C, respectively. Injection volume on GC was 1 µl. The temperature was programmed for 90 °C for 0.5 min, followed by 30 °C/min to 290 °C; hold for 5 minutes and 30 °C to 320 °C hold for 4 minutes. The carrier gas used was N₂ (2ml/min). Rotavapor and soxhlet extraction apparatus were used to extract and concentrate the MAPs. The process described above has been checked for recovery efficiencies using spiked MAPs standard. Recovery range between 30 % and 70 % with the lower value corresponds to the lower molecular weight MAPs compound. Presented data is corrected accordingly with the mean of triplicate analysis. Replicated analysis give an error between ± 10% and ± 20%. More than one internal standard that is similar in analytical behavior to the compounds of interest were selected. The measurement

of the internal standard is not exaggerated by method or matrix interference. The following deuterated AHCs compounds were used to pre-spike the sample extracts: Napthalene d₈; Acenaphthene d₁₀; Fluorene d₁₀, Phenanthrene d₁₀; Benzo(a)anthracene d₁₂; Chrysene d₁₂ and Perylene d₁₂. The base peak ion was used as the principal ion for quantification of the standard compounds. Four concentration levels calibration standard solutions of AHCs was prepared at a minimum of by adding appropriate volumes of one or more stock standard solutions to a conical flask. The stock standard solutions were prepared from certified solutions of 2000 µg/mL of each analyte of interest (Merk, Germany). The solutions of stock standard were prepared at concentrations of 100 µg/ml in toluene. A calibration table is created from instrument responses for target compound challenge concentrations of 25, 50, 100 and 250 ng/nL. To each calibration standard solution, 100 ng/µL of deuterated internal standard was inserted. Calibration standard solutions were at a concentration near but above the maximum detection limit and the other concentrations should correspond to the expected range of concentrations found in real samples or define the working range of the Gas Chromatograph. RF value on the working range was kept constant (<10% RSD), the RF assumed to be invariant and the average RF was used for calculations. Alternatively, the result was used to plot a calibration curve of response ratios, As/Ais vs. RF. The working calibration curve or RF was verified on each working day by the measurement of one or more calibration standard solutions. If the response for any analyte varies from the predicted response by more than ± 10%, the test was repeated using a fresh calibration standard solution (Kumar *et al.*, 2014).

3. Results and Discussion

The characterized physical properties of biodiesel samples synthesized in the present study are given in Table 1 and Table 2. All the values were approximately similar to the values accepted in EN and ASTM standards as reported in literature (Ayhan, 2009; Kumar *et al.*, 2014). The physical parameter of biodiesel indicated that vegetable oils (Castor, Linseed, Karanja and Jatropa) were in between 96% to 99% when converted in to the biodiesel. The mean concentration of six ACHs is depicted in Figure 2.

Table 1. Physical properties of the biodiesel samples

Physical Parameter	Types of Biodiesel				Standard Limits	Standard Methods
	Jatropa	Linseed	Castor	Karanja		
Flash point (°C)	175.0	442.0	190.0	165	>101	EN 3679
Pour point (°C)	13.00	10.00	23.0	25	> 10	ASTM D2500
Density (g/ml)	0.86	0.85	0.92	0.89	0.86-0.90	EN 3675
Viscosity (Cst)	5.20	2.90	3.20	2.1	1.9-5.0	ASTM D445
Acid value (wt%)	0.33	0.22	4.00	2.01	<0.5	EN 14104
Iodine value (cg Iodine/g oil)	91.00	110.0	127.0	118	<120	EN 14111
Ester content (%)	99.00	100.0	96.0	95	>96.5%	1H NMR

Table 2. Esters characterization using GC-MS

Sr. No.	FAEEs	wt %
1.	Palmitate	34.13
2.	Linoleate	40.20
3.	Stearate	3.99
4.	Oleate	21.68

The catalyst, 3-Li/CaO, was found to yield the 98±2% conversion

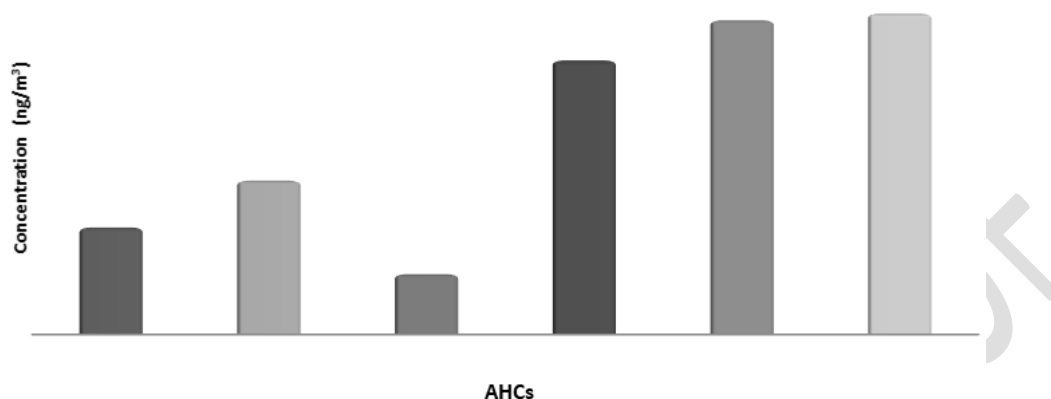


Figure 2. Mean Concentration of AHCs

3.1 ^1H NMR of biodiesel samples and their raw material

Biodiesel produced was further characterized and analyzed by ^1H NMR technique. The ^1H NMR spectra of vegetable oils (Figure 3) show a multiplet at 4.2-4.4 ppm due to the presence of glyceridic protons. The peaks in the range of 1.0-3.0 ppm (in the proton NMR spectra of biodiesel and vegetable oils) are due to the protons of the aliphatic hydrocarbon chain whereas the unsaturated protons in biodiesel as well as in vegetable oil appear at 5.4 ppm. In proton NMR spectra spectrum of biodiesel sample, disappearance of glyceridic protons (4.2-4.4 ppm)

and appearance of a new peak at 3.6 ppm due to $-\text{OCH}_3$ protons support the formation of biodiesel after the transesterification reaction of vegetable oils. The Proton NMR spectra have also been used to quantify biodiesel by following the literature reported procedure (Kumar *et al.*, 2014).

$$\% \text{ Yield} = \{2I_{(\text{methoxy})}/3I_{(\text{methylene})}\} \times 100 \quad (1)$$

where $I_{(\text{methoxy})}$ and $I_{(\text{methylene})}$ are the areas of the methoxy and methylene protons, respectively, in ^1H NMR spectra of biodiesel.

$$\% \text{Yield (Castor bio diesel)} = (2 \times 3.51 / 3 \times 245) \times 100 = 95.59 = 96\%$$

$$\% \text{ Yield (Linseed bio diesel)} = (2 \times 3 / 3 \times 2.03) \times 100 = 98.52 = 99 \%$$

$$\% \text{ Yield (Jatropha bio diesel)} = (2 \times 1.17 / 3 \times 0.07) \times 100 = 100 \%$$

$$\% \text{ Yield (Karanja bio diesel)} = (2 \times 0.17 / 3 \times 1.07) \times 100 = 99.1 \%$$

The biodiesel prepared from Linseed, Castor, Jatropha and Karanja oils shows complete conversion in Thin Layer Chromatography (TLC). In proton NMR analysis, the yield of prepared biodiesel samples comes out to be more than 96.5%. Thus, the prepared biodiesel samples found to satisfy the specification as mentioned in EN and ASTM standards. According to the EN and ASTM standard when % yield of the biodiesel samples comes out more than 96 %, it means that vegetable oil is complete converted in to the biodiesel oil. So our NMR spectra results indicate that our vegetable oil was complete converted in to the biodiesel samples. Blends of biodiesel and conventional hydrocarbon-based diesel are produced by mixing biodiesel and petroleum diesel in suitable proportions under appropriate conditions. Figure 4 depicts the mean

concentration of AHCs generated by Jatropha, Linseed Karanja and Castor biodiesel/diesel blends.

The results of AHCs concentration produced by diesel and different biodiesel ratios (20:80, 30:70 and 40:60) have been represented in Table 3. The results clearly demonstrate that diesel fuel generated highest concentration of AHCs (36.36 $\mu\text{g/L}$). Table 3 also specifies that out of the four BD blends, Jatropha levels were dominant among all the ratios (20:80, 30:70 and 40:60) of biodiesel having 23.64, 19.26 and 17.63 $\mu\text{g/L}$ respectively, followed by Linseed (21.49, 18.13 and 15.43 $\mu\text{g/L}$), Castor (19.05, 16.11 and 14.01 $\mu\text{g/L}$) and Karanja (13.28, 11.21 and 9.21 $\mu\text{g/L}$) BD blends. It is evident from Figure 5 that when concentrations of the blends increase from 20:80 to 40:60 then concentration of all AHCs decrease as compared to the pure diesel.

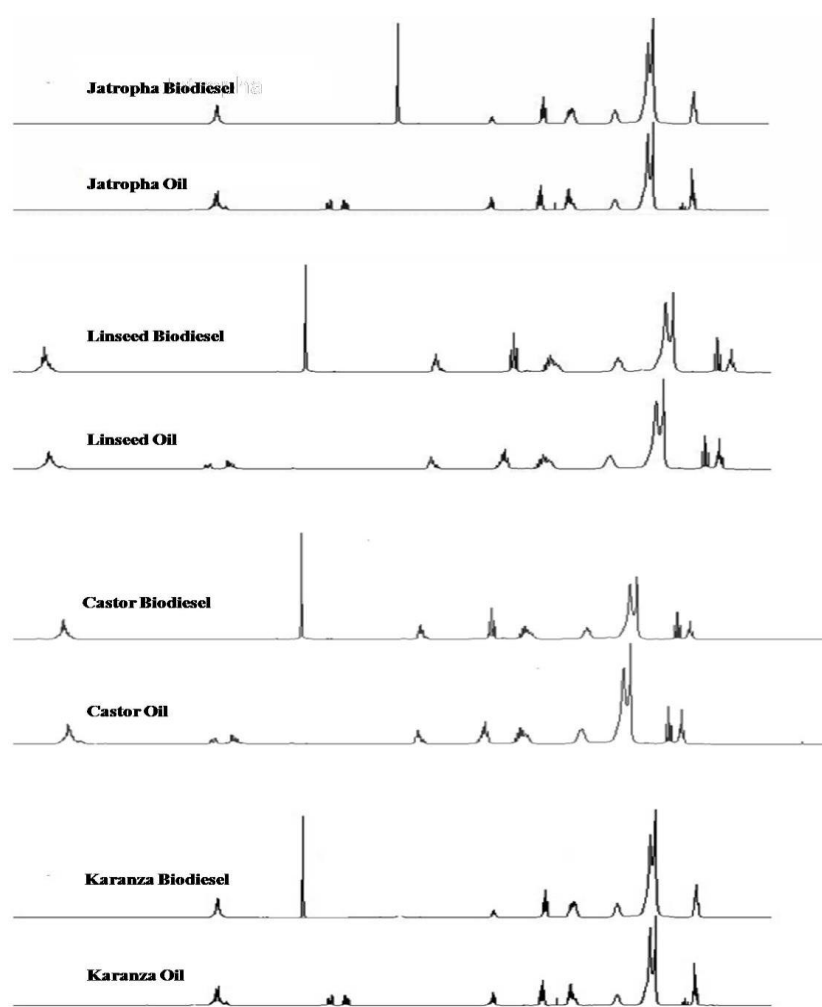


Figure 3. H^1 NMR spectra of peaks different biodiesel and oils

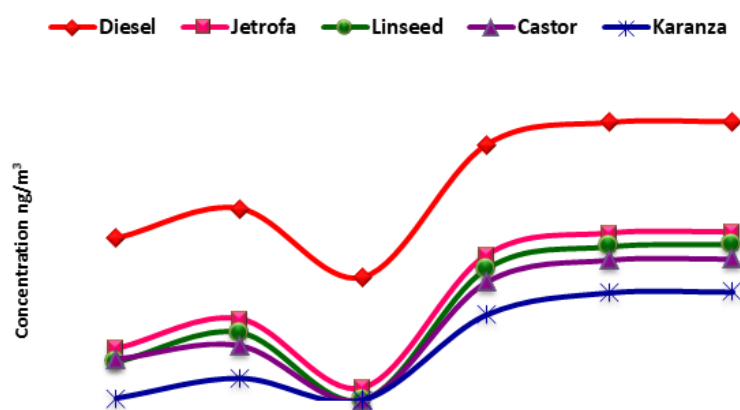


Figure 4. Mean concentration of AHCs generated by Jatropha, Linseed Karanja and Castor biodiesel/diesel blends

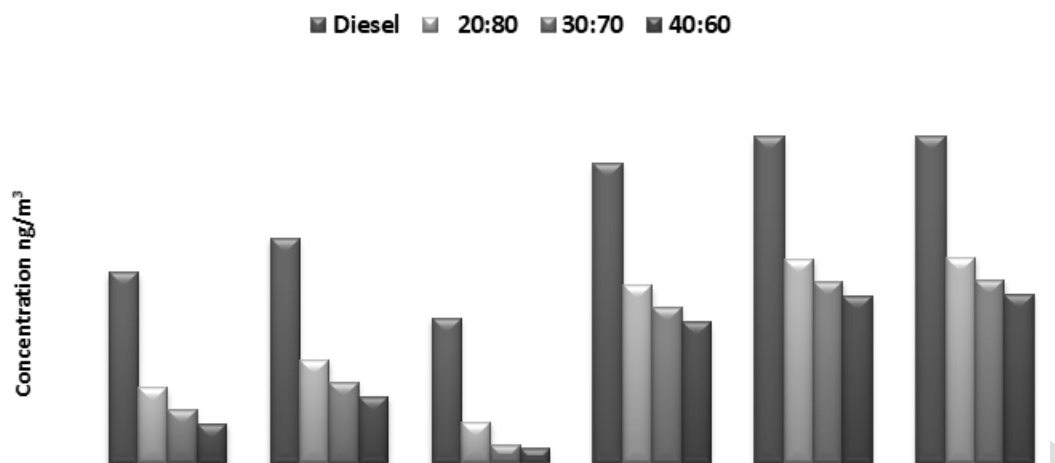


Figure 5. Decreasing trend of AHC levels from pure diesel to 40:60 ratio

Figure 6 illustrates that the order of emission of AHCs from the exhaust of engine were in the order of Diesel (39%) > Jatropha-diesel (19%) > Linseed-diesel (17%) > Castor-diesel (15%) > Karamza-diesel (10%). As per our knowledge this was the first comprehensive information, which is very important in reduction of these pollutants in our environment. Blending of biodiesel with diesel could be a healthier option for PAHs reduction in diesel driven automobiles. Biodiesel was blended with Diesel, the concentration of almost all carcinogenic PAHs reduces in comparison to pure Diesel automobile. This shows that blending of Diesel with different Biodiesel reduces the concentration of almost PAHs emission and it could be a better fuel as compared to diesel in terms of carcinogenicity.

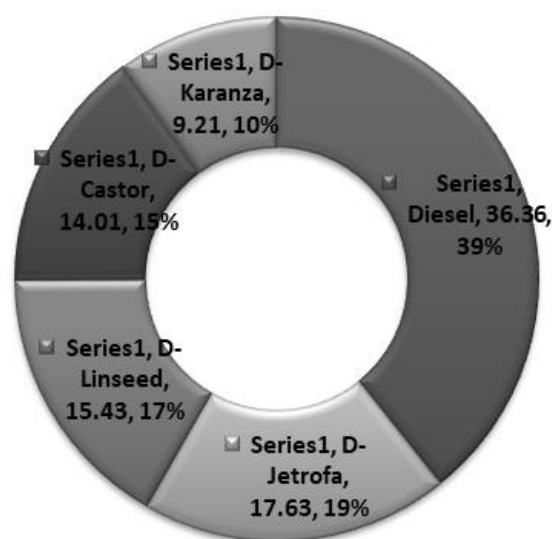


Figure 6. Emission (%) of AHCs from different blending ratios of diesel and biodiesel

Table 3. AHCs levels produced by diesel and different biodiesels ratios (20:80, 30:70, 40:60)

AHCs	Diesel	D:BD = 20:80					D:BD = 30:70				D:BD = 40:60			
		Jatropha	Linseed	Castor	Karanza	Jatropha	Linseed	Castor	Karanza	Jatropha	Linseed	Castor	Karanza	
BEN	4.57	2.45	2.08	2.00	0.73	1.72	1.52	1.51	0.38	1.45	1.07	1.16	0.05	
TOL	5.41	3.29	2.92	2.38	1.31	2.56	2.36	1.89	0.95	2.29	1.91	1.54	0.62	
XYL	3.47	1.35	1.01	0.84	0.68	0.62	0.45	0.35	0.33	0.35	BDL	BDL	BDL	
CHR	7.21	5.09	4.72	4.18	3.10	4.36	4.16	3.69	2.75	4.09	3.71	3.34	2.42	
BAP	7.84	5.71	5.35	4.81	3.71	4.98	4.79	4.32	3.38	4.71	4.34	3.97	3.05	
BAA	7.86	5.75	5.41	4.84	3.75	5.02	4.85	4.35	3.42	4.74	4.40	4.00	3.07	
Average Total	36.36	23.64	21.49	19.05	13.28	19.26	18.13	16.11	11.21	17.63	15.43	14.01	9.21	

AHCs- Aromatic Hydrocarbons, D:BD- Diesel:Biodiesel Ratio, BEN- Benzene, TOL- Toluene, XYL- Xylene, CHR- Chrysene, BAP- Benzo(a)pyrene, BAA- Benzo(a)anthracene

3.2 Mutagenicity test

We examined the human cell mutagenicity of diesel engine exhaust fine particulate matter and found

subfractions containing unsubstituted polycyclic aromatic compounds (PACs) responsible for a considerable portion of the mutagenic potency of the whole atmospheric sample. In this test, several strains of the bacterium

Salmonella typhimurium were used that carry mutations in genes involving in histidine synthesis. These strains are auxotrophic mutants, i.e. they require histidine for growth, but cannot produce it. This method examines the capability of a substance in creating mutations which in turn results to a "prototrophic" state, so that the cells can grow on a histidine-free medium (Mauderly, 1987; Shankar, 1990; Morris *et al.*, 1995; Petry *et al.*, 1996). Figure 7 depicts that the percentage contribution of B(a)P and B(a)A was 26% each, followed by chrysene (22%),

toluene (12%), benzene (9%) and xylene (5%) whereas chrysene accounted for most of the mutagenic potencies that could be assigned to specific compounds within the atmospheric samples.

Table 4 indicated the individual AHCs contributions to human mutagenicity of diesel engine exhaust airborne fine particle. High mutagenicity concentration of AHCs especially Chrysene (15.02 IMF) is a matter of concern in diesel engine exhaust.

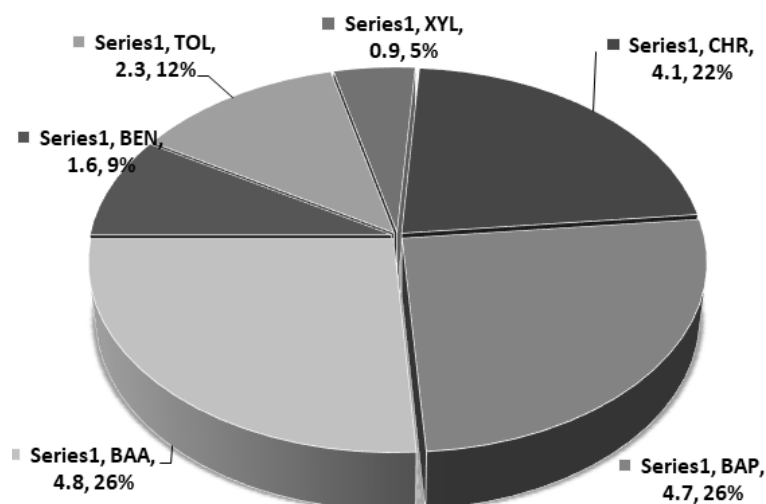


Figure 7. Percentage contribution of AHCs from exhaust of engine

Table 4. Individual AHCs contributions to human mutagenicity of diesel engine exhaust airborne fine particle

Sr. No.	AHCs	IMF (X 10 ⁶) / mg of EOC ²	Sources
1	Chrysene	15.02-5.31	Diesel engine exhaust
2	B(a)P	5.02-0.85	Diesel engine exhaust
3	B(a)A	4.02-0.51	Diesel engine exhaust
4	Benzene	3.55-1.02	Diesel engine exhaust
5	Toluene	3.12-2.01	Diesel engine exhaust
6	Xylene	3.02-0.55	Diesel engine exhaust

3.3 Toxic equivalency factors and lifetime lung cancer risk

Several AHCs species including benzo(a)pyrene (as most carcinogenic compound) have been classified into probable (2A) or possible (2B) human carcinogens by the International Agency for Research on Cancer (IARC, 1987). BaP is a five ring (C₂₀H₁₂) compound, which is mutagenic for human cells in culture (Osborne and Crosby, 1987) and carcinogenic in whole animal assays (Cerna *et al.*, 2000). According to the literature (Kumar *et al.*, 2015), the toxic equivalent factor for BaP is one (1), which is highest among all the AHCs. In order to calculate the carcinogenic potencies associated with the total AHC exposures from D/BD exhaust; we pragmatically used the sum of each individual BaP_{eq} (i.e., total-BaP_{eq}) as a surrogate indicator. Therefore, in the present study toxic equivalent factor (TEF) of the given species relative to BaP carcinogenic potency have been used. Toxicity

equivalency concentrations (TEQs) were calculated as the product of summing up the values obtained by TEF values and concentrations of AHCs, as follows (Kumar *et al.*, 2015):

$$TEQ = \sum (C_i \times TEF_i) \quad (2)$$

where, TEQ: toxic equivalent concentration, C_i: concentration of AHC_i.

The above method has the main advantage of being relatively easy to apply in the environments affected by human sources, however, may underestimate risk due to not all AHC, but only limited compounds, are considered (WHO/IPCS, 1998). For pragmatic purpose, the list of TEFs compiled by Bieniek & Łusiak (2012) and Masih *et al.* (2009) was adopted in this study.

Table 5. Toxic Equivalence Factor (TEF) of AHCs

AHCs	TEF	Diesel (only)	Exposure	BD+D (20:80)	Exposure	BD+D (30:70)	Exposure	BD+D (40:60)	Exposure	
BEN	0.001	4.57	0.00457	1.815	0.001815	1.2825	0.001283	0.9325	0.000933	
TOL	0.001	5.41	0.00541	2.475	0.002475	1.94	0.00194	1.59	0.00159	
XYL	0.001	3.47	0.00347	0.97	0.00097	0.4375	0.000438	0.35	0.00035	
CHR	0.01	7.21	0.0721	4.2725	0.042725	3.74	0.0374	3.39	0.0339	
BAA	0.1	7.86	0.786	4.9375	0.49375	4.41	0.441	4.0525	0.40525	
BAP	1	7.84	7.84	4.895	4.895	4.3675	4.3675	4.0175	4.0175	
			8.71155				5.436735			
							4.84956			

- Kumar V., Kothiyal N.C. and Saruchi (2015), Analysis of Polycyclic Aromatic Hydrocarbon, Toxic Equivalency Factor and Related Carcinogenic Potencies in Roadside Soil within a Developing City of Northern India, *Polycyclic Aromatic Compounds*, **36**(4), 506-526.
- Kumar V., Kothiyal N.C., Saruchi and Masih A. (2014a), Environmental fate and behavior of some PAHs at roadside ambient air in a fast-developing city environment of Northern India, *Journal of Chinese Advanced Materials Society*, **2**(2), 82-98.
- Masih A. and Taneja A. (2006), Polycyclic Aromatic Hydrocarbons (PAHs) concentrations and related carcinogenic potencies in soil at a semi-arid region of India, *Chemosphere*, **65**(3), 449-456.
- Masih A., Saini R., Singhvi R. and Taneja A. (2009), Concentration, sources and exposure profiles of PAHs in particulate matter (PM10) in the north central part of India, *Environ Monit Assess*, **163**, 421-431.
- Mauderly J.L. (1987), Diesel exhaust is a pulmonary carcinogen in rats exposed chronically by inhalation, *Fundamental and Applied Toxicology*, **9**, 208-221.
- McClellan R.O. (1987), Health effects of exposure to diesel exhaust particles, *Annual Review of Pharmacology and Toxicology*, **27**, 279-300.
- Morris W.A., Versteeg J.K., Bryant D.W., Legzdins A.E., McCarry B.E. and Marvin C.H. (1995), Preliminary comparisons between mutagenicity and magnetic susceptibility of respirable airborne particle, *Atmos. Environ.*, **29**(23), 3441-3450.
- Osborne M.R. and Crosby N.T., 1987. Benzopyrenes. Cambridge University Press, Cambridge, UK
- Petry T., Schmid P and Schlatter C (1996), The use of toxic equivalency factors in assessing occupational and environmental health risk associated with exposure to airborne mixtures of polycyclic aromatic hydrocarbons (PAHs), *Chemosphere*, **32**, 639-648.
- Salmeen I.T., Pero A.M., Zator R., Schuetzle D. and Riley T.L. (1984), *Environ. Sci. Technol.*, **18**, 375-382.
- Satyarthi J.K., Srinivas D. and Ratnasamy P. (2009), Estimation of free fatty acid content in oils, fats, and biodiesel by ¹H NMR Spectroscopy, *Energy and Fuel*, **23**, 2273-2277.
- Shankar RV. Characterization of atmospheric polynuclear aromatic hydrocarbons with special reference to automobile exhaust. 1990: Ph.D. Thesis. Jawaharlal Nehru University, New Delhi, India.
- USEPA, (2009). Technical Assistance document for the National Air Toxics trends stations program for Office of Air Quality Planning and Standards (C304-06), Research Triangle Park, NC 27711. Eastern Research Group, Inc. 601 Keystone Park Drive, Suite 700 Morrisville, NC 27560.
- WHO/IPCS, 1998. Environmental Health Criteria 202 Selected non-Heterocyclic PAHs. WHO, Geneva.