

OPTIMIZATION OF RAW ACRYLIC YARN DYE WASTEWATER TREATMENT BY ELECTROCHEMICAL PROCESSES: KINETIC STUDY AND ENERGY CONSUMPTION

Fatih ILHAN*, Kubra ULUCAN-ALTUNTAS*, Can DOGAN, Ugur KURT

*Corresponding Authors: Yildiz Technical University, Environmental Engineering Department, Istanbul, Turkey.

E-mail: filhan@yildiz.edu.tr

Abstract

The textile industry has an important place in the environmental pollution due to its heavy water consumption and to the toxic content of dye. Every succeeding day, the water quality is deteriorated because the wastewater containing the dye is supplied to the receiving medium. In this study, The electrocoagulation and electrofenton processes, which produce less waste than the conventional methods and which are less costly, have been investigated for decolourization of acrylic yarn dyeing wastewater. The electrocoagulation process was involved four electrodes parallel connected. To optimize the treatment, response surface methodology (RSM) was applied. The operating independent conditions were selected as the current density (20 -100 A/m²), reaction time (5-25 minutes) and initial pH (pH 4.3-pH 8.3). As a result of optimization by RSM method, the highest Colour, COD and TOC removal were obtained as 96.2%, 43.8% and 40.4 % , respectively. In order to obtain these results, it was necessary to apply a current density of 100 A/m² to the wastewater which has been set to an initial pH of 7.2 and 20.7 minutes. With the experimental setup installed, high colour removal can be achieved in as little as 15 minutes. Although the colour removal is high, COD removal does not meet discharge standards. Therefore, electrofenton process was applied for enhancing COD and TOC removal and removal rate increased to 70.0% and 61.5%, respectively. In order to study the removal mechanism for acrylic yarn dye wastewater by electrocoagulation process, kinetic modelling was applied. Energy consumption was also assessed.

Keywords: Electrofenton, Electrocoagulation, Parallel electrodes, Aluminium, Iron, Kinetic Modelling, Energy Consumption

1 Introduction

The textile industry is one of the sectors on which emphasis should be put in terms of the prevention of the industrial pollution and the protection of the water resources. Textile industry to have an important position in the export and employment of the developing countries makes

the subject more delicate. The Wastewater of the textile industry is generally characterized with high COD, strong colour, high pH, low biological refinability [1-3] and many sub-branches of this industry due to the production of wastewater in very variable structures and volumes [4-5]. The fact that the textile industry has a very variable character of wastewater makes it difficult to treat generalization with a single treatment method. For this reason, it requires the separate examination of each production facility.

The treatment of textile wastewater is studied especially for the colour and COD removal and conducted with biological treatment methods [5-7], chemical and physicochemical methods [8] and membrane technologies [9]. Besides; various methods are used in the chemical oxidation processes such as ozone [3,10]. Electrochemical studies have also taken place in this area as well as these processes. Especially the processes of electrocoagulation and advanced oxidation have recently found a usage in this area.

In the electrocoagulation process; other than the chemical coagulation, the coagulant substances are given to the environment with the dissolution of Fe [11,12] or Al [11-13] metals chosen as the anode material during the electrolysis. The efficient parameters on the removal mechanism regarding the electrocoagulation process are the current density, starting pH, electrode type, settlement of the electrodes, bonding ways, conductivity and reaction period [11,14].

The electrocoagulation process has a very wide usage spectrum. High yields could be obtained in areas such as leachate [15] whose treatment is the hardest and domestic wastewater [16,17] whose treatment is much easier. In the textile industry, it is stated that the EC process is very effective especially in the colour removal [18]. For instance; Gourich and his friends have investigated the efficiency of dyestuff removal using a mixed dysprosium red dyestuff solution with a continuous flow electrocoagulation process [18]. In a study conducted with basic red 46 and basic blue 3 dyestuff solutions, the high removal efficiencies could be obtained [19]. Another method is the electrofenton process in which electrocoagulation and fenton processes are used together. Electrocoagulation is basically considered to be the developed condition of chemical coagulation [20]. From this point of view, the electrofenton process is a process in which the classical fenton process is carried out by means of an electric current through the iron-water transition.

The purpose of this study is to examine the removal efficiencies of COD, Colour and TOC parameters by means of electrocoagulation and electrofenton processes .the most important

pollutant parameters are taking place in the acrylic yarn dyeing bath and provide their optimisation with the method of Response Surface Methodology (RSM).

2 MATERIAL VE METHOD

2.1 Wastewater

The used wastewater in the experimental studies has been attained from acrylic yarn dye house. In the facility, acrylic yarns are taken to dyeing process without being subjected to pre-finishing process. Dye bath wastewater and bath wash water occurring after dyeing are accumulated in a balancing pool and refined by chemical method without being combined with domestic wastewater. Experimental studies have been carried out with wastewater taken in separate periods of time from acrylic dye bathes due to the fact that the dye bath waters represent the wastewater of the facility. Table 1 contains some parameters of dye bath waters. Basic dyestuff is used in the acrylic dye bath. The chemical structure of the used dispergator is alkylpolycoether, and it is non-ionic. COD, colour and TOC analysis's were performed under SM 5220C, SM 2120 E and 5310B and all the chemicals were in a technical grade.

Table 1. Properties of the acrylic yarn dye wastewaters

COD mg/L	TOC mg/L	Colour				pH	Conductivity µs/cm
		λ ₄₃₆	λ ₅₂₅	λ ₆₂₀	Abs		
1.550	551	0,182	0,149	0,135	0,466	4,32	2.150

2.2 Experimental Studies

The Experimental studies on the electrocoagulation process have been carried out with 250 mL samples in Plexiglas reactors. Reactor dimensions are 6.5 cm x 6.5 cm x 18 cm and Fe and Al electrodes have been used in dimensions of 5 cm x 18 cm. In the experimental studies, 4 electrodes with a total active anode area of 101 cm² have been placed at 15mm intervals and connected in an unipolar parallel.

In the electrofenton experiments, 250 mL samples have been placed in the reactor cells made of Plexiglas, and the experimental apparatus used in the electrocoagulation experiments have been utilized. Unlike the electrocoagulation experiment apparatus, two electrodes have been used as 1 anode and 1 cathode in the electrofenton experiments and the electrode intervals have been determined as 6 cm.

2.3 Optimization Method

In this study, D-optimal design method provided by a computer algorithm called response surface methodology has been used in order to optimize the experimental data. It is a design that reveals the relationship between the dependent variables and the set of the independent variables in an appropriate manner. In order to see the effects of the variables and find the optimum conditions, the following second-degree polynomial regression model has been used.

$$y = a_0 + \sum a_i x_i + \sum a_{ij} x_i x_j + \sum a_{ii} x_i^2$$

Here; y shows the response variables, a_0 is the constant, a_i , a_{ii} and a_{ij} show the linear coefficients and x_i , x_j show the independent variables. Variables have been coded within the direction of the following equation.

$$\alpha = \frac{x_i - x_0}{\Delta x}$$

Here; α gives the code value of the independent variables, e_i . x_i give the real value, x_0 gives the real value in the medium point and Δx gives the change in x_i variable.

A five-level three-factor central composite design was applied for electrocoagulation process and current Density (x_1), initial pH (x_2) and reaction time (x_3) are the selected independent variables, and the levels of the variables are coded as -2, -1, 0, +1 and +2. Coded factors belong to electrocoagulation process are given in Table 2.

Table 2 Study matrix for the electrocoagulation

Independent Variables	Factor	Levels				
	X_j	$\alpha = -2$	-1	0	+1	$\alpha = +2$
Current Density (A/m ²)	X_1	20	40	60	80	100
Initial pH	X_2	4,3	5,3	6,3	7,3	8,3
Reaction time (min)	X_3	5	10	15	20	25

2.4 Kinetic Modelling

Dissolved Al^{+3} and Fe^{+2}/ Fe^{+3} ions from anode electrodes in electrocoagulation process forms into metal hydroxides with high adsorption capacity. In order to understand removal mechanism, Pseudo 1 and Pseudo 2 kinetic models were applied [11]. Pseudo-first-order kinetic model can be linearized as follows,

$$\ln(q_e - q_t) = \ln q_e - k_1 t$$

where, q_e and q_t are the adsorption capacities at equilibrium and at a given time, k_1 is constant rate of adsorption(g/mg/min). Pseudo-second-order kinetic model is given in the following:

$$\frac{t}{q_t} = \frac{1}{k_2 q_e^2} + \frac{1}{q_e} t$$

where, k_2 is a constant rate of adsorption for pseudo-second-order-kinetic model (g/mg/min).

3 Results and Discussion

3.1 Electrocoagulation Process

The current density, pH and time values to be used in the response surface model have been detected within the direction of the literature information. Considering the own pH value (pH = 4.3) of the acrylic yarn dye wastewater, the pH range has been determined as 4.3-8.3 for the purpose of examining the effects of acidic, neutral and basic starting pH. The data of the preliminary study conducted with acrylic yarn dye wastewater has been benefited in the determination of the current density. In the study conducted by Daneshvar et al. [21] with 2 different basic dyestuff, it has been found that the colour could be highly removed at a current density of 60-80 A / m² [21]. Because of the use of basic dyes in acrylic yarn dyeing, initial flow density in the preliminary work has been selected as 60 A / m² for both electrode types. The obtained results are given in Table 4. The pH is set at 6 in the study conducted with aluminium electrodes and at 7 in the study conducted with iron electrodes. The treatment time has been chosen as 15 minutes.

Table 3. Results of the preliminary study conducted for the electrocoagulation process

Current Density (A/m ²)	Al Electrodes		Fe Electrodes	
	COD removal (%)	Colour Removal (%)	COD removal (%)	Colour Removal (%)
60	29.73	86.23	34.93	96.79
80	31.92	88.32	37.12	97.13
100	32.58	88.53	38.53	95.32
150	31.78	89.57	38.97	95.21
200	34.03	90.85	39.59	94.05
250	36.19	90.65	41.13	96.13

As it could be seen in Table 3; no significant increase in COD and colour removal is observed when the current density is increased from 100 A / m² to 200 A / m² for both electrode types. For this reason, considering the energy consumption, the current density of 100 A / m² has been determined as the upper limit value in the statistical model for both iron and aluminium

electrodes. The generated Box-Wilson test set and results are given in Table 4 and Table 5 , aluminium and iron electrodes according to the study matrix is given in Table 2.

Table 4 RSM results conducted with aluminium electrodes

No	Current Density (A/m ²)	Influent pH	Reaction Time (min)	COD Removal (%)	Colour Removal (%)	TOC Removal (%)	Energy Consumption (kWh/m ³)
	x ₁	x ₂	x ₃	y ₁	y ₂	y ₃	y ₄
1	-1	-1	-1	23.03	85.13	19.64	1.26
2	1	-1	-1	30.15	87.13	26.72	4.59
3	-1	1	-1	22.64	83.43	19.09	1.2
4	1	1	-1	29.07	85.65	25.38	4.54
5	-1	-1	1	26.13	87.04	22.31	2.52
6	1	-1	1	34.03	89.92	30.45	9.18
7	-1	1	1	25.66	85.34	22.38	2.4
8	1	1	1	32.17	88.89	28.71	9.07
9	0	0	0	30.52	88.74	27.11	4.21
10	0	0	0	30.26	88.65	26.75	4.21
11	0	0	0	30.15	88.96	26.85	4.21
12	0	0	0	30.21	89.36	26.61	4.21
13	-2	0	0	21.85	82.06	17.65	0.67
14	2	0	0	33.45	88.4	30.08	10.61
15	0	-2	0	29.85	87.68	26.14	4.7
16	0	2	0	29.38	84.78	25.59	4.03
17	0	0	-2	22.25	85.13	18.61	1.4
18	0	0	2	31.24	89.15	27.73	7.02
19	0	0	0	30.35	88.45	26.61	4.21
20	0	0	0	30.67	89.09	27.28	4.21

Table 5 RSM results conducted with iron electrodes

No	Current Density (A/m ²)	Influent pH	Reaction Time (min)	COD Removal (%)	Colour Removal (%)	TOC Removal (%)	Energy Consumption (kWh/m ³)
	x1	x2	x3	y1	y2	y3	y4
1	-1	-1	-1	27.05	90.21	21.25	1.01
2	1	-1	-1	34.8	94.04	31.71	3.24
3	-1	1	-1	30.23	92.77	27.83	0.96
4	1	1	-1	35.75	94.68	32.57	6.84
5	-1	-1	1	28.85	91.49	25.75	2.02
6	1	-1	1	37.59	95.32	33.17	6.37
7	-1	1	1	34.25	94.47	31.11	1.91
8	1	1	1	38.74	96.81	34.45	3.19
9	0	0	0	35.25	96.6	32.63	2.81
10	0	0	0	35.65	95.96	32.44	2.81
11	0	0	0	36.18	96.11	32.89	2.81
12	0	0	0	35.41	95.85	32.51	2.81
13	-2	0	0	26.44	89.36	24.92	0.46
14	2	0	0	38.86	96.15	35.46	7.37
15	0	-2	0	27.89	90.43	22.96	3.29
16	0	2	0	34.65	95.38	33.03	2.68
17	0	0	-2	27.37	91.74	25.02	0.96
18	0	0	2	36.97	96.38	33.83	4.68
19	0	0	0	35.73	96.23	32.37	2.81
20	0	0	0	36.05	95.74	33.13	2.81

Based on the given results in Table 4 and Table 5, the results of the ANOVA conducted for COD, Colour, TOC removal efficiencies and energy consumption of both aluminium and iron electrodes are given in Table 6. It could be said that the meaningfulness of each one of them is high. Equations obtained according to this are given in Table 7.

Table 7 shows the equations obtained by choosing the effective parameters in a way that the confidence range will be $p > 0.05$. It could be expressed from the attained equations that the initial pH is more effective in iron electrodes than aluminium electrodes. While the only current density and reaction time is effective in removing COD and TOC with aluminium electrodes, initial pH is also effective in COD and TOC removal with iron electrodes. The three selected variables have been found to be effective in colour removal conducted with the both aluminium and iron electrodes. In the case of energy consumption, it has been seen that only the current density effect is observed in the study conducted with iron electrodes, while the reaction time is also effective as well as the current density in the study conducted with the aluminium electrodes.

Table 6 ANOVA results attained for electrocoagulation

Electrode	Dependent Variables	Coded	R ²	Relevance
Al	COD Removal	y ₁	0.989	4.97 E-07
	Colour Removal	y ₂	0.992	6.56 E-08
	TOC Removal	y ₃	0.991	1.24 E-07
	Energy Consumption	y ₄	0.998	1.03 E-11
Fe	COD Removal	y ₁	0.990	2.65 E-07
	Colour Removal	y ₂	0.992	8.27 E-08
	TOC Removal	y ₃	0.988	5.27 E-07
	Energy Consumption	y ₄	0.940	1.27 E-03

Table 7. Equations attained with Aluminium and Iron electrodes

Electrode	Dependent Variables	Equation
Al	COD Removal	$y_1 = 30.227 + 3.198.x_1 + 1.943.x_3 - 0.744 x_1^2 - 0.97 x_3^2$
	Colour Removal	$y_2 = 88.82 + 1.458.x_1 - 0.732.x_2 + 1.118.x_3 - 0.939 x_1^2 - 0.689 x_3^2$
	TOC Removal	$y_3 = 26.758 + 3.294.x_1 + 1.954.x_3 - 0.98 x_3^2$
	Energy Consumption	$y_4 = 4.163 + 2.493.x_1 + 1.426.x_3 + 0.833.x_1.x_3 - 0.334 x_1^2$
Fe	COD Removal	$y_1 = 35.79 + 3.21.x_1 + 1.513.x_2 + 1.925.x_3 - 1.07 x_2^2 - 0.844 x_3^2$
	Colour Removal	$y_2 = 96.04 + 1.593.x_1 + 1.10.x_2 + 0.979.x_3 - 0.853 x_1^2 - 0.815.x_2^2 - 0.526 x_3^2$
	TOC Removal	$y_3 = 32.60 + 2.94.x_1 + 2.14.x_2 + 1.80.x_3 - 1.20.x_2^2 - 0.84 x_3^2$
	Energy Consumption	$y_4 = 2.82 + 1.723.x_1$

According to the efficient parameters; COD, Colour and TOC removal efficiencies attained with the iron and aluminium electrodes and the attained quadratic surface plots are given in Figure 1 and Figure 2.

COD Removal Efficiency (y_1) is given in **Error! Reference source not found.** with showing the effects of current density (x_1) and the reaction time (x_3) at the point $\alpha = 0$ for initial pH (x_2) which is pH 6.3. It can be seen from the surface plot that when the current density and reaction time are increasing the removal rate is increased. It can be observed from the coefficient of independent variables given in Table 7 that, while initial pH (x_2) is not effective in COD and TOC removal efficiency with aluminium electrodes, it is effective in Colour Removal Efficiency. Low pH values are found to be more effective in Colour removing efficiency ($0 < \alpha < 0.5 - 5.8 < \text{pH} < 6.3$) and current density is found to be more effective at the point of $0.5 < \alpha < 1.5$ which is 70-80 A/m² (Figure 1.b). Kobya et al. were also found that lower than pH6 is more effective in COD removal with aluminium electrodes while higher than pH7 was found to be more effective with iron electrodes [23]. In addition, COD removal efficiencies were also lower as obtained in this study [23]. In Figure 1.c TOC Removal Efficiency (y_3) can be

observed with effect of current density (x_1) and the reaction time (x_3). Removable TOC is found to be around 32% with a reaction time higher than 18 minutes and with a current density higher than 90 A/m².

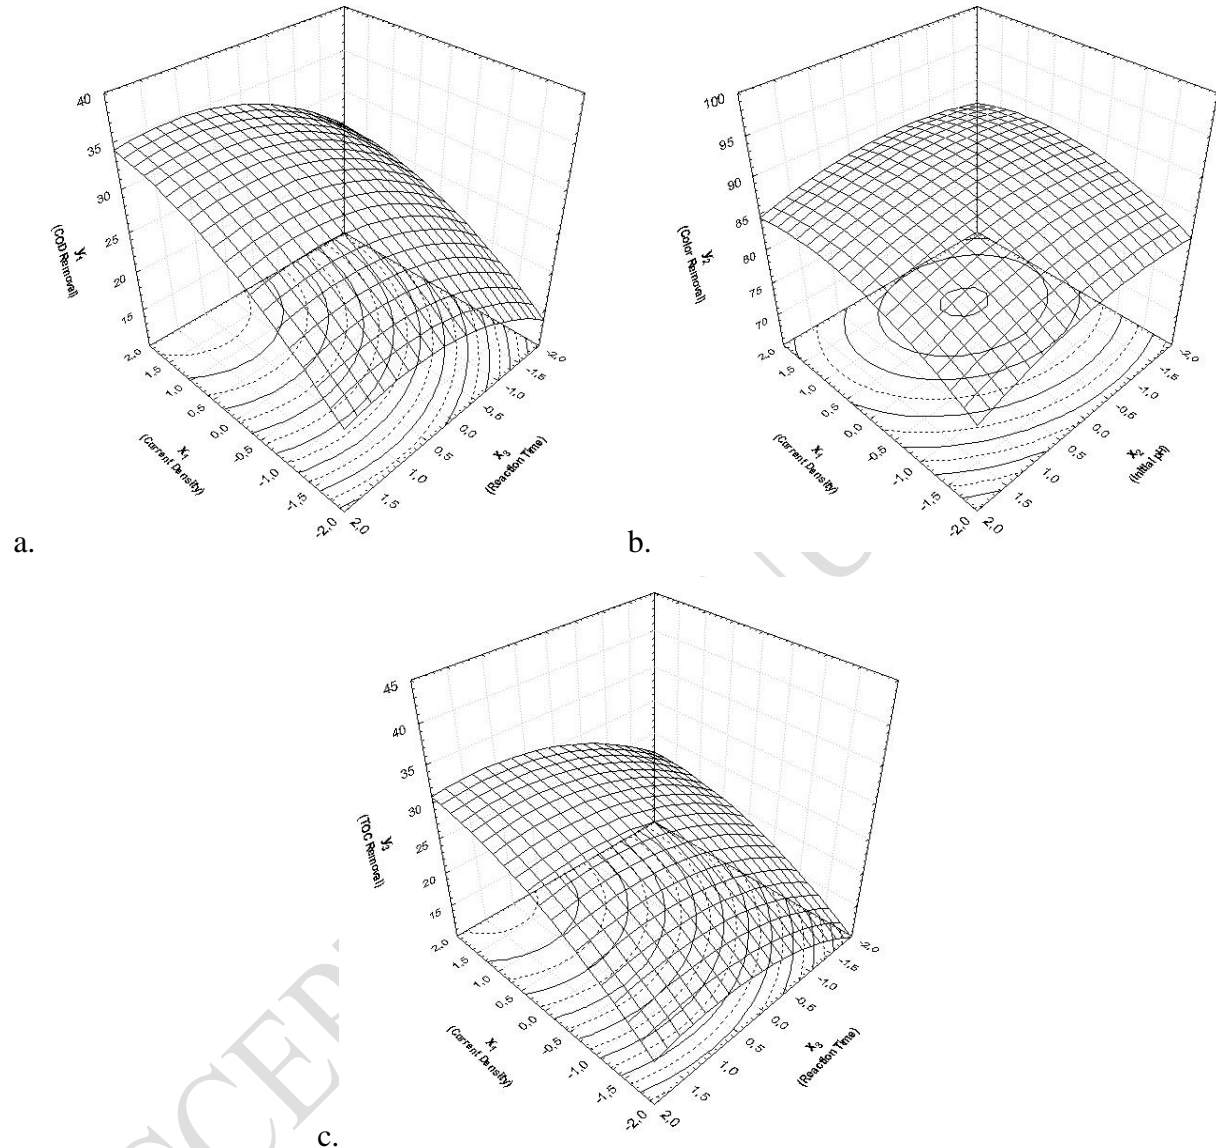


Figure 1. COD, Color and TOC Removal by Aluminium electrodes

COD, colour and TOC removal efficiencies by iron electrodes can be seen in Figure 2.a, Figure 2.b and Figure 2.c, respectively. In **Error! Reference source not found.**, the effects of current density (x_1) and the reaction time (x_3) on COD removal efficiency can be noticed at the point $\alpha = 0$ for initial pH (x_2) which is pH 6.3. The highest COD removal efficiency can be obtained with reaction time higher than 18 minutes and current density higher than 90A/m². In Figure 2.b, colour removal efficiency can be seen with the effect of initial pH (x_2) and current density.

Range of initial pH with pH6.3 and pH7.8 is found to be more effective. From Figure 2.c it can be obtained that the current density is more effective than reaction time on TOC removal.

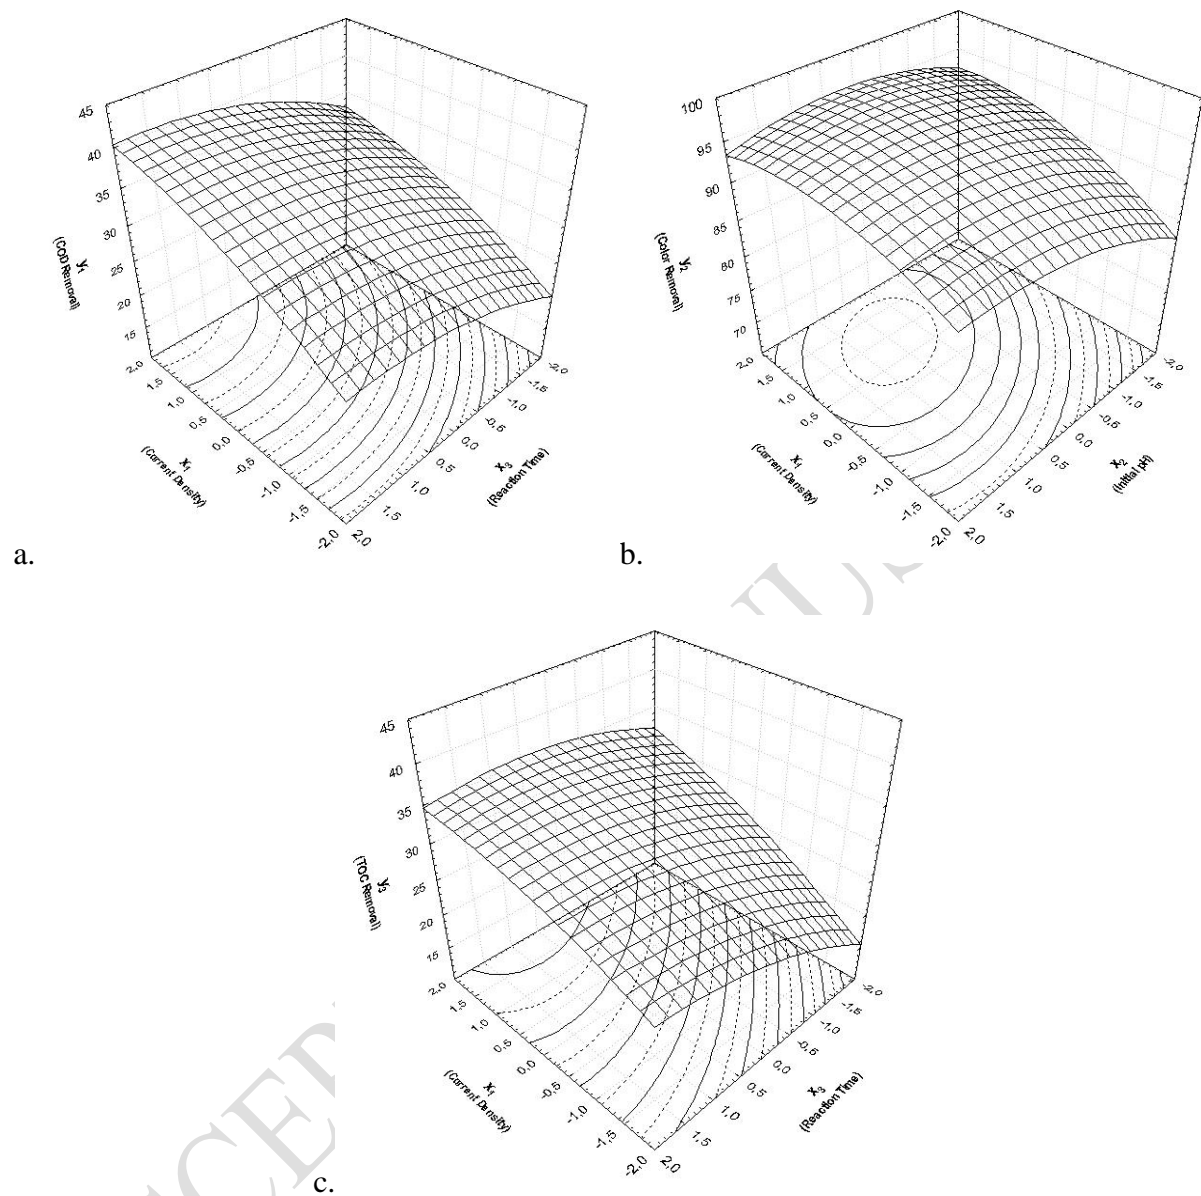


Figure 2. COD, Colour and TOC Removal by Iron electrodes

As it could be seen in Figure 1 and Figure 2; approximately 40% removal could be achieved with iron electrodes, while 35% removal could be achieved with the aluminium electrodes in COD removal. It is seen that TOC removal is similar to that of COD and the colour removal is approximately and respectively by 90% and 95% for the aluminium and iron electrodes. When the electrodes are compared, it has been observed that iron electrodes are more effective than aluminium electrodes. This situation has been realized as expected in terms of COD removal. It is generally specified that iron electrodes are as effective as aluminium electrodes in the

removal of COD from wastewater. This is due to the fact that the iron oxidation capacity increases the efficiency of COD removal [22].

The equations attained for the iron electrodes are given in Table 7 and the codes attained as a result of the optimization conducted with the help of MathCad and the values belonging to the independent variables are given in Table 8. The results also correspond to the data obtained from the surface plots. 43.8 % COD, 96.2% Colour and 40.4 % TOC removal could be achieved according to these optimized values. When optimum conditions are applied in electrocoagulation process, 42.9% COD, 98% colour, 41.1% TOC removal was obtained which are in the 95% confidence interval. The Required energy was calculated as 6.27 kWh/m³ textile wastewater. Energy consumption in Turkey was 0.08 US \$/kWh for industry. the cost of electrocoagulation process by iron electrodes will be 0.50 US \$/m³ textile wastewater.

Table 8. Optimization of electrocoagulation process

Independed Factors	Coded Levels	Real Values
Current Density (A/m ²)	2	100 A/m ²
Initial pH	0.892	pH 7.2 mg/L
Reaction Time (min)	1.14	20.7 min

Pseudo-first-order and pseudo-second-order kinetic models were investigated to consider removal mechanism involved in electrocoagulation process. Correlation coefficients and constant rates of kinetic models were given in Table 9. The results showed that colour, COD and TOC removal mechanism is more fitted to pseudo-first-order kinetic model. By this information it can be said that the removal of these three parameters is also occurred by adsorption on metal hydroxides and the three parameters are not affecting each other in the removal. In addition, highest adsorption capacity for COD and TOC was calculated as 678.5 and 249.4 mg/g iron hydroxide.

Table 9. Kinetic modeling for electrocoagulation process with iron electrodes

Parameters		Pseudo-First-Order Kinetic	Pseudo-Second-Order Kinetic
Colour	R ²	0.988	0.972
	q _e	0.068	0.005
COD	R ²	0.937	0.792
	q _e	678.5	2.917

TOC	R ²	0.932	0.791
	q _e	249.4	8.166

3.2 Electrofenton Process

While colour removal could be achieved in high ratio with the electrocoagulation process, it has been seen that the COD and TOC removal have remained by the ratio of 40%. The electrofenton process has been applied within the direction of the study data attained as a result of the optimization of the electrocoagulation process and its impact on the efficiency has been desired to be observed. According to our previous studies [11,20] and also to minimize the treatment cost, pH of the wastewater has been adjusted as 3 and the used H₂O₂ concentration is 1200 mg/L. Time has been chosen as 30 minutes.

Table 10. Removal Efficiencies with Electrofenton process

Current Density, A/m ²	COD Removal Rate, %	Colour Removal Rate, %	TOC Removal Rate, %
50	51.4	81.9	42.9
100	70.0	94.2	61.5
150	67.7	99.0	59.2
200	70.3	97.2	63.1

As seen in Table 10; COD, Colour and TOC removals have been attained as respectively 70.0 %, 94.2 % and 61.5 % when a current density of 100 A/m² is applied. The Removal could be achieved in a higher ratio when it is compared to the electrocoagulation.

When electrofenton and electrocoagulation processes compared on cost, the difference will be occurred by hydrogen peroxide usage. Since the cost of 50% hydrogen peroxide in technical quality is \$400/ton, approximate H₂O₂ cost will be \$0.8/m³ wastewater.

4. Conclusion

In this study in which the treatments of the wastewater of the acrylic yarn dye house both with electrofenton process and electrocoagulation process have been examined. With the kinetic modelling study, it is understood that removal of COD, colour and TOC are not affecting each other and adsorption on metal hydroxides is an effective removal mechanism on

electrocoagulation process. Energy consumption is also studied and the required energy is calculated as 6.27 kWh/m³ textile wastewater which costs 0.50 US \$/m³ textile wastewater.

In addition, it has been observed that the electrofenton process is much more effective when it is compared to the electrocoagulation process. While colour removal could be achieved in higher removal rate with the electrocoagulation process, it has been seen that it is insufficient in the issue of COD and TOC removal. In this meaning, electrofenton process has been applied for the purpose of increasing the COD and TOC removals and discovering that removal could be achieved by the ratio of 70.0 % and 61.5% has been attained. An innovative approach, such as the use of nanoparticles in the fenton-like processes could enhance the COD and TOC removal.

Acknowledgements

This research received no specific grant from any funding agency in the public, commercial, or not-for-profit sectors.

References

- [1] Korbahti, B.; Artut, K.; Gecgel, C.; Ozer, A.(2011) Electrochemical decolorization of textile dyes and removal of metal ions from textile dye and metal ion binary mixtures. *Chemical Engineering Journal*, 173, 677-688.
- [2] Pons M.N., Alinsafi A., Khemis M., Lerclerc J.P., Yaocoubi A. ve Benhammou A., Nejmeddine A., (2005), "Electro-coagulation of reactive textile dyes and textile wastewaters", *Chemical Engineering and Processing*, 44:461-470
- [3] Ulucan-Altuntas K., İlhan F. (2018) "Enhancing Biodegradability of The Textile Wastewater By Ozonation Process: Optimization With Response Surface Methodology", *Ozone-Science & Engineering*, 6:465-472
- [4] Chaudhari S. ve Tantak N.P., (2006), "Degradation of azo dyes by sequential fenton oxidation and aerobic biological treatment", *Journals of Hazardous Materials*, B136:698-705
- [5] Cinar O., Yaşar S., Kertmen M., Demiröz K., Yiğit A.Ö. ve Kitis M., (2008), "Effect of cycle on biodegradation of azo dye in sequencing batch reactor", *Process Safety and Environment Protection*, 86:455-460
- [6] Peres, J.A., Lucas M.S., Dias A.A., Sampaio A. ve Amaral C., (2007), "Degradation of textile reactive azo dye by a combined chemical-biological process: Fenton's reagent-yeast",

Water research 41:1103-1109

[7] Khataee A.R., Vatanpour V. ve Amani Ghadim A.R., (2009), “ Decolorization of C.I. acid blue 9 solution by UV/Nano-TiO₂, Fenton, Fenton-like, Electro-fenton and Electrocoagulation processes: A comparative study”, Journal of hazardous materials, 161:1225-1233

[8] Gupta V.K. and Suhas, (2009), “Application of low-cost adsorbents for dye removal- A review”, Journal of environmental management, 90:2313-2342

[9] Dilek F.B., Sahinkaya E., Uzal N. ve Yetis U., (2008), “Biological treatment and nanofiltration of denim textile wastewater for reuse”, Journals of hazardous materials, 153:1142-1148

[10] Sundrarajan M., Vishnu G. ve Joseph K., (2007), “Ozonation of light-shaded exhausted reactive dye bath for reuse”, Dyes and pigments, 75:273-278

[11] Ulucan K., Kurt U. (2015) "Comparative study of electrochemical wastewater treatment processes for bilge water as oily wastewater: A kinetic approach", Journal of Electroanalytical Chemistry, 747:104-111

[12] Kobya M., Gengec E., Sensoy M.T., Demirbas E., Treatment of textile wastewater by electrocoagulation using Fe and Al electrodes: Optimisation of operating parameters using central composite design, Coloration Technology, 130 (2014) 226-235.

[13] Brillas E., Martinez C.A., (2009), “Decontamination of Wastewaters Containing Synthetic Organic Dyes by Electrocoagulation Methods : A General Review” Applied Catalysis B: Environmental, 87, 105-145.

[14] Sari Erkan H., Yazici Güvenç S., Varank G., Engin G. (2018) "The investigation of chemical coagulation and electrocoagulation processes for tannery wastewater treatment using response surface methodology ", Desalination and Water Treatment, 113:57-73

[15] İlhan F., Kurt U., Apaydın Ö., Gönüllü M.T, (2008), “Treatment of leachate by electrocoagulation using Aluminium and Iron Electrodes”, Journal of Hazardous Materials, 154:381-389

[16] Kurt U., Gönüllü M.T., İlhan F., Varınca K., (2008), “Treatment of domestic wastewater by electrocoagulation in a cell with Fe-Fe electrodes”, Environmental Engineering Science, 25 (2): 153-161

[17] Korbahı, B. (2014) Finite Element Modeling of Continuous Flow Tubular Electrochemical Reactor for Industrial and Domestic Wastewater Treatment. Journal of The

Electrochemical Society, 161, E3225-E3234

[18] Phalankornkule C., Polgumhang S., Tongdaung W., Karakat B. ve Nuyut T., (2010), "Electrocoagulation of blue reactive, red disperse and mixed dyes and application in treating textile effluent", *Journal of Environmental Management*, 94:918-926

[18] Gourich B., Merzouk B., Seki A., Madani K., Vial Ch., Barkaoui M., (2009), "Studies on the decolorization of textile dye wastewater by continuous electrocoagulation process", *Chemical Engineering Journal*, 149:207-214

[20] Ilhan F., Yetilmezsoy K., Kabuk H.A., Ulucan K., Coskun T., Akoglu B. (2017) "Evaluation of operational parameters and its relation on the stoichiometry of Fenton's oxidation to textile wastewater", *Chemical Industry & Chemical Engineering Quarterly*, 23 (1): 11-19

[21] Daneshvar N., Oladegaragoze A. ve Djafarzadeh A., (2006), " Decolorization of basic dye solutions by electrocoagulation an investigation of the effect of operational parameters" *Journal of Hazardous Materials*, B129:116-122

[22] Diaz C.B., Hernandez I.L., Morales G.R., Bilyeu B., Urena-Nunez F., (2009), "Influence of the anodic material on electrocoagulation performance", *Chemical Engineering Journal*, 148:97-105

[23] Kobya M., Can O. T., Bayramoglu M., (2003) "Treatment of textile wastewaters by electrocoagulation using iron and aluminium electrodes" *Journal of Hazardous Materials*, 100 (1-3):163-178