

**Evaluation of the aerobic and anaerobic degradation of an industrial effluent from vegetable tannery processing of leather on batch reactors**

Anyela Ramirez-Canon<sup>1</sup>, Athanasios Angelis-Dimakis<sup>1</sup>, Diana Carolina Ospina-Mora<sup>2,\*</sup>

<sup>1</sup>School of Applied Sciences, University of Huddersfield, Queensgate, HD1 3DH, Huddersfield, UK

<sup>2</sup>Facultad de Ingeniería, Universidad Nacional de Colombia, Colombia

\*Corresponding author:

E-mail: [dospinam@unal.edu.co](mailto:dospinam@unal.edu.co), tel: +57 3124036432


ACCEPTED MANUSCRIPT

## ABSTRACT

In this study, the aerobic and anaerobic biodegradability of the industrial wastewater from the vegetable tanning process were evaluated. Water from a food wastewater treatment system was used as seed inoculum for the aerobic process and mature granular methanogenic sludge from a brewery industrial wastewater plant was used for the anaerobic process. The water from the tanning industry had a biological to chemical oxygen demand ratio of 33% with values of total chemical oxygen demand (COD) in the range of 342000 mg O<sub>2</sub>/L and total dissolved solids of 506595 mg/L. The assay of the tannery effluent under aerobic conditions resulted in a decrease of COD of 39.2% and a degradation of tannins lower than 12% after 26 days, while the anaerobic degradation showed a COD reduction of 65% with a 39% of degradation of tannins. The production of methane and Volatile Fatty Acids, during the anaerobic treatment, suggests a potential adaptation of biological organisms present in the mature anaerobic granular methanogenic sludge.

**Keywords:** tannery wastewater, tannins, anaerobic degradation, aerobic degradation, industrial effluent

## GRAPHICAL ABSTRACT

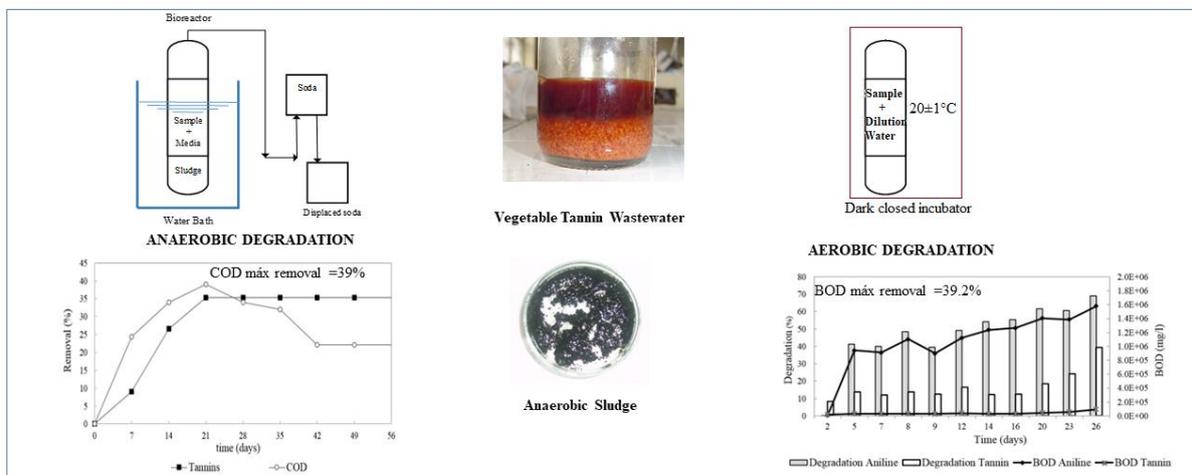

## 1. Introduction

The tannery industry represents an important portion of the worldwide economy. The Food and Agriculture Organization has estimated that in 2006 the total production of hides and skins was 18.7 billion square feet with a total revenue of 2.9 billion dollars, with China, Italy, Brazil, Russia and India being the major producers of leather (UNIDO, 2010). The process of turning animal skin into leather involves a series of steps such as removal of hair, tanning and dyeing. All these steps require the use and disposal of water, with an estimated water consumption of 25-80 m<sup>3</sup> per ton of skin or hides during the tanning processes alone (Romero-Dondiz et al., 2015). As a result of the large requirement of water in the process and the significant generation of wastewater, tanneries are often built close to rivers or ‘within pipeline distance to the sea’ (UNIDO, 2010), where industrial discharges occur. This therefore has a detrimental effect on the environment, especially in countries where there is weak environmental legislation and control. Although there are different types of tanning methods, the majority of techniques include similar steps for the preparation of the skin and the stabilization of the leather. For example, in the area of San Benito in Bogotá (Colombia), where the industrial water samples were collected, small- and medium-sized companies use a process in which the raw animal skin is initially preserved with salts such as NaCl and NaHCO<sub>3</sub> at the slaughterhouses. Once in the industrial facilities, a cleaning process takes place wherein the skin is rinsed thoroughly with water in order to remove external agents such as faeces, blood, mud and salt. Skin that is exposed to salt preservation is immersed in water for 180 hours to hydrate the skin and induce a swelling process. The next step involves removing the hair and epidermis of the skin. For that, the skin is exposed to alkaline solutions such as sodium sulphide or sodium carbonate, which affect the collagen tissue through a saponification reaction of the natural fat contained in the skin. The saponification favours the extraction and elimination of proteins from the skin by biodegrading the proteins and fibres due to the alkalinity and by making the proteins soluble

in water. The skin is then exposed to mechanical removal of the hair and remaining muscle and fat. Before the tanning process, the excess of carbonates is removed in a process called 'delimiting'. Some processes also include the use of enzymes, bacteria or fungi to remove the remaining fibres of collagen followed by an acidification of the raw skin (Dixit et al., 2015).

During the tanning process, the skin is treated in order to preserve the material against any biological degradation. Different chemical products are used in this stage, which determine the final texture of the leather. One of the most common methods for preserving the leather is the chrome method in which salts of trivalent chromium ( $\text{Cr}^{3+}$ ) are used (Fathima et al., 2015). Tanning with chromium salts leads to the production of light and flexible leather, ideal for the manufacture of dresses and accessories. Another tanning method is the 'vegetable' method (Kanagaraj et al., 2015) in which tannins from plants (for example from the tree *Schinopsis sp.*) are used to obtain thick and rigid leather such as those used in footwear and saddlery industry. Tannins are compounds with high molecular weight and high content of phenol-hydroxyl groups. The hydroxyl group allows tannins to bond with proteins and other macromolecules of the animal skin due to their affinity to form protein-tannin complexes (Makkar et al, 2007), making the leather more stable and minimizing its natural degradation. Furthermore, the antiseptic capacity of tannins, protects the leather against fungus, bacteria and yeast.

Additionally to  $\text{Cr}^{3+}$  salts and vegetable tannins, a variety of compounds can be used during the preservation of the leather, such as aluminium salts, alums, formaldehyde, melanin-urea, styrene, and maleic anhydride (Lofrano et al., 2013). After the tanning process and before drying the leather, the material is exposed to other treatments such as dyeing and greasing, which are optional depending on the desired quality of the final product. The different alternatives of leather manufacture result in a generation of wastewater with very different physicochemical

properties. As a result, the selection of the most appropriate wastewater treatment for a specific type of effluent that results is a challenging task (Ayoub et al, 2013).

Different technologies have been studied for the treatment of tannery wastewater, including filtration (Romero-Dondiz et al. 2015), adsorption (Gomes et al., 2016), ion exchange (Gutterres and Mella 2014), chemical coagulation and flocculation (Mella et al., 2017), electrochemical methods (Keerthi, et al., 2013; Isarain-Chávez et al. 2014), ozonation (Mella et al. 2017), advanced oxidation processes (Charumol and Keerthinarayana 2017; Sekaran et al. 2013; Cruz-Rizo et al. 2017) and membranes (Keerthi et al. 2013). However, these methods require specialized infrastructure, making them expensive, especially for small- and medium-sized tanning industrial companies.

On the other hand, biological processes are an inexpensive alternative for treating effluents. However, the physicochemical properties of the tanning wastewater make it difficult to treat the water biologically (Goswami and Mazumder, 2014) as the tannins affect the natural development of the microorganisms responsible for the degradation of organic matter. Tannins inhibit enzymatic processes, alter the membranes and limit the transfer of metallic ions across them (Scalbert, 1991). Despite the toxicity of tannins, some organisms such as bacteria (*Achromobacter* sp., *Klebsiella pneumoniae*, and *Streptococcus caprinus*), fungi (*Aspergillus* sp., *Fusarium* sp) and yeast (*Candida nitrativorans*, *Debaromyces hansenii*, *Pichia adzetti*) have shown capacity to grow in this type of wastewater and even degrade tannins under specific conditions (Kanagaraj and Mandal, 2012; Mingshu et al., 2006). Some of the defensive mechanisms that these species use are the production of polymers biocompatible with tannins, synthesis of enzymes resistant to tannin toxicity and production of siderophores capable to oxidising and degrading tannins (Bhat et al., 1998). This microbial degradation makes viable the use of biological methods in the treatment of this type of industrial effluents. Yet studies are required to identify potential sources of organisms capable of adapting to the toxicity of

tannins. In this study, the aerobic and anaerobic biodegradability of the industrial wastewater from the vegetable tanning process was evaluated using water from a food wastewater treatment system as the seed inoculum for the aerobic process and mature anaerobic granular methanogenic (MAGM) sludge from a brewery industrial wastewater plant.

## 2. Methods


The biodegradability of wastewater from the vegetable tanning process of leather (industrial effluent) using Quebracho (*Schinopsis sp.*) was evaluated under aerobic and anaerobic conditions. Samples of the wastewater were collected from the discharge of the tanning batch reactor (i.e. rotating drum) and preserved following the Standard Methods (APHA, 2005). The aerobic degradation was studied using the method of closed bottle test. The dilution water was prepared according to the Standard Methods (5210-B) (APHA, 2005), using a phosphate buffer solution, containing MgSO<sub>4</sub>, CaCl<sub>2</sub> and FeCl<sub>3</sub> at the concentrations suggested in the standard method. The dilution water was then saturated with oxygen by injecting a continuous air-flow for 24 hours. Water from a food wastewater treatment system (BOD<sub>5</sub> = 480 mg/L and COD = 800 mg/L) was used as the seed inoculum. The controls used in the aerobic degradation experiments are shown in Table 1 in which aniline was used as a control compound. A total of 60 bioreactors (300 mL Winkler bottles) were used for the tests, controls and replicates. The bioreactors were incubated at 20±1°C, in darkness for 26 days. The measurements of oxygen were performed every two days using an oximeter (WTW InoLab OxiLevel 2).

**Table 1.** Experimental bottles and controls used in the aerobic analysis of biodegradability

	Industrial waste water	Aniline	Seed inoculum	Dilution water
Experiment	8 mL	-	1mL	Yes
Control 1	-	-	1mL	Yes
Control 2	-	1mL	1mL	Yes
Control 3	-	1mL	-	Yes

The anaerobic degradation was performed by measuring the methane production over a period of 48 days. Mature anaerobic granular methanogenic (MAGM) sludge, from a brewery wastewater treatment plant, was used for all the anaerobic experiments. In order to provide the optimal conditions for the anaerobic organisms, the pH of the wastewater was adjusted to the range of 7 and 7.2. Likewise, the media was enriched with mineral, reductive and vitamin solutions. The mineral solution contained  $\text{KH}_2\text{PO}_4$ ,  $\text{Na}_2\text{HPO}_4 \cdot 2\text{H}_2\text{O}$ ,  $\text{NH}_4\text{Cl}$ ,  $\text{NaCl}$ ,  $\text{MgCl}_2 \cdot 6\text{H}_2\text{O}$ ,  $\text{HCl}$ ,  $\text{H}_3\text{BO}_3$ ,  $\text{MnCl}_2$ ,  $\text{FeCl}_2$ ,  $\text{CoCl}_2$ ,  $\text{NiCl}_2$ ,  $\text{ZnCl}_2$ ,  $\text{NaOH}$ ,  $\text{Na}_2\text{SeO}_3$ ,  $\text{Na}_2\text{WO}_4$ ,  $\text{Na}_2\text{MoO}_4$ , and Resarzurin at the concentrations suggested in the standard method. For the reductive solution,  $\text{NaHCO}_3$  and  $\text{Na}_2\text{S} \cdot 9\text{H}_2\text{O}$  in the proportion of 4:2.4 w/w was used. The vitamin solution was prepared using  $\text{CaCl}_2 \cdot 2\text{H}_2\text{O}$ , Biotin, Nicotinamide, p-aminobenzoic acid, Tiamine, Pantotenic Acid, Piroxidamine, Cianocobalamine; Riboflavine. All these solutions were sterilised in an autoclave at  $120^\circ\text{C}$  and 15 psi and deaerated with nitrogen gas to eliminate the dissolved oxygen before being used.

The anaerobic bioreactors were filled with the industrial effluent and the MAGM sludge maintaining a mass relation chemical oxygen demand and volatile suspended solids (COD/VSS) of 5:1 and 1:1. (i.e. 5g of COD of wastewater per 1g of VSS of the sludge or 1g of COD of wastewater per 1g of VSS of the sludge). The mineral, reductive and vitamin solutions were then added in a proportion of 1%, 5% and 1% v/v respectively. The temperature of the bioreactors was controlled using a thermostatic water bath set up at  $30^\circ\text{C}$ . The bioreactors were sealed and a plastic tubing was used to connect the top of each reactor with inversed face-down water traps containing soda (Figure 1). This method enables the study of the biodegradability by measuring the volumetric production of methane and therefore establishing the activity of the anaerobic bacteria (Field, 1987).

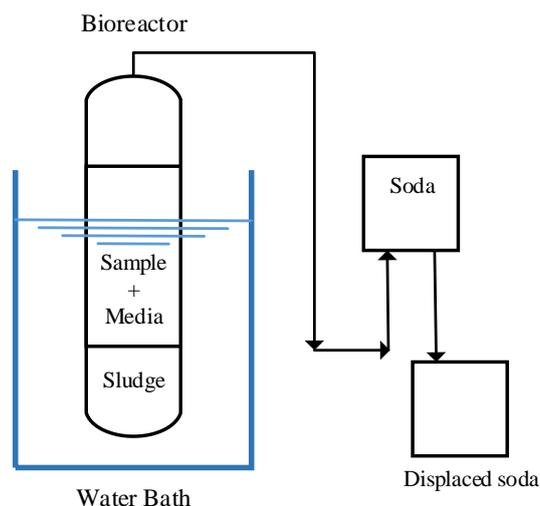

**Figure 1.** Scheme of adiabatic setup

The physicochemical characterization of the industrial effluent and the treated wastewater was performed using the Standard Methods as shown in Table 2. The volatile fatty acids (VFA) were measured through spectrophotometry using the ferric hydroxamate reaction (Siedlecka et al. 2008). The condensed tannins were measured using the Butanol-HCl method (Porter et al., 1986).

**Table 2.** Standard Methods used in the physicochemical characterization of the industrial and treated wastewater

Property	Standard Method / Technique
Total solids (TS)	APHA 2540 B. Gravimetric Method
Total, fixed and volatile suspended solids (TSS, FSS, VSS)	APHA 2540 D. Gravimetric Method
pH	APHA 4500-H+ B. Electrometric Method
Alkalinity	APHA 2320 B. Titration Method
Total and soluble COD	APHA 5220 C Closed reflux - Titrimetric Method
BOD <sub>5</sub>	APHA 5210 B. 5 days test at 20 C
Total Nitrogen	APHA 4500-Norg B. Macro-Kjeldahl Method
Ammonium Nitrogen	APHA 4500-NH <sub>3</sub> B and 4500-NH <sub>3</sub> E. Distillation and Titration
Phenols	APHA 5530- C. Extraction with Chlorophorm

A second set of anaerobic experiments were performed, in order to study the toxicity of the industrial water on the anaerobic organisms after being treated anaerobically. After 48 days of treatment, the industrial wastewater was exposed to another anaerobic treatment performed under similar conditions as the previous experiments. The production of methane, oxygen and nitrogen was determined using TCD-chromatography (Varian 3400) with a column MolSieve 5A45/60 de 2m x 1/8", at 50°C with a flowrate of helium of 30 mL/min.

### 3. Results and Discussion

An initial characterization of the sludge (Table 3) showed that the sample contains equal portions (50/50) of fixed and volatile suspended solids.

**Table 3.** Initial characterization of MAGM sludge

TSS (mg/L)	FSS (mg/L)	VSS (mg/L)
82675	40950	41725

As shown in Table 4, the initial characterization of the wastewater from the vegetable tanning process showed low values of pH and high values of total COD. Almost 33% of the total COD corresponded to soluble COD. The ratio BOD/COD of the wastewater was 0.33, indicating a potential biodegradation of only 33%. Although the result obtained was low compared to the recommended BOD/COD ratio of 0.5 for biological degradation (Samudro and Mangkoedihardjo 2010), other studies have reported initial BOD/COD ratios lower than 0.5 with final degradation higher than 50% (Borglin, S.E., Hazen, T.C. 2004),(Ghasimi et al. 2009) due to the adaptation of the microorganisms to the adverse environment. In terms of solids, 98% of the total solids were dissolved solids in which 87.2% were fixed dissolved solids. For this type of effluent, dissolved solids have been related mainly to the presence of tannins (He et al. 2007). On the other hand, suspended solids are related mainly to remains of animal skin such as proteins (Dixit et al. 2015). The presence of sulphides and ammoniacal nitrogen in the

tanning wastewater are due to the use of ammonia and salts such as sodium sulphide during the unhairing and delimiting processes.


**Table 4.** Initial characterization of the Industrial effluent (wastewater from the vegetable tanning process)

Physicochemical Property	Units	Value
pH	-	4.3
Alkalinity	mg/L CaCO <sub>3</sub>	0
Soluble COD	mg/L O <sub>2</sub>	112000
Total COD	mg/L O <sub>2</sub>	342400
BOD <sub>5</sub>	mg/L O <sub>2</sub>	114667
Phenols	mg/L	<0.01
Ammoniacal Nitrogen	mg/L N <sup>-</sup> NH <sub>4</sub> <sup>+</sup>	280
Total Kjeldahl Nitrogen	mg/L N	448
Total Solids	mg/L	515675
Total Fixed Solids	mg/L	459170
Total volatile Solids	mg/L	56505
Total Suspended Solids	mg/L	9380
Total Dissolved Solids	mg/L	506595

### 3.1. Aerobic Biodegradation

Aerobic degradation of tannins are usually not effective due to the high toxicity of tannins to aerobic microorganism (Bhat et al., 1998). Furthermore, tannins can be degraded resulting in other toxic by-products such as resorcinol, pyrogallol and phloroglucinol (Patra, 2012). In this study, aerobic degradation was carried out as a baseline to be compared to anaerobic conditions using aniline as control. Under the experimental conditions, the BOD of the aniline was far higher than the BOD for the degradation of the industrial effluent (Figure 2). Since the BOD for the degradation of tannins was very low at the beginning, the consumption of oxygen was mainly attributed to microorganism's metabolism rather than potential chemical oxidation of

tannins (which would have occurred from the first day). Likewise, the increment of oxygen demand after 12 days suggested a potential adaptation of the microorganism to the environmental conditions. The BOD of the control compound (aniline) was reduced to 69% after 26 days, while the industrial effluent with tannins displayed only 39.2% of BOD removal after 26 days with a degradation of tannins lower than 12%. This result is in agreement with a study of an aerobic degradation of a similar industrial effluent where the biodegradability was in the range of 24 to 34 % with minimal degradation of tannins (Balakrishnan et al., 2018).

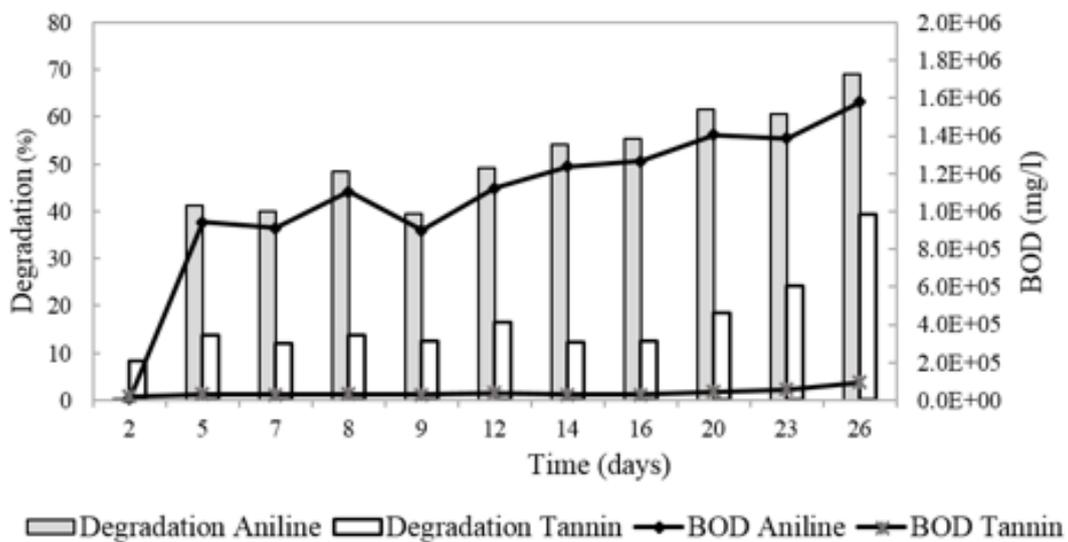


**Figure 2.** BOD and degradation of industrial effluents with tannins and control compound

### 3.2. Anaerobic Biodegradation

In order to guarantee a proper supply of nutrients to the system, the relation between COD, nitrogen and phosphorous (COD:N:P) was checked. Results showed a COD:N:P relation of 350:5:1 which are optimum for the anaerobic digestion (Namour and Müller 1998). The biodegradability of the effluent was evaluated through the production of methane and changes in the dissolved COD, using samples without tannins as controls. As shown in Figure 3, experiments carried out with a mass of COD/VSS ratio of 1:1 displayed minimal generation of

methane and degradation of COD with values similar to the controls; therefore, the analysis of these experiments are not included herein. On the other hand, experiments with a COD/VSS ratio of 5:1 displayed a rapid initial production of methane observed during the first seven days, followed by a decrease on the methane production rate. The plateau on the methane production and in the production of volatile fatty acids (VFAs) (Figure 4) are related to the potential inhibition of the anaerobic organisms due to the toxicity of tannins. The biodegradation of the industrial effluent, calculated from the production of methane, was an average of 65% expressed as reduction of COD.

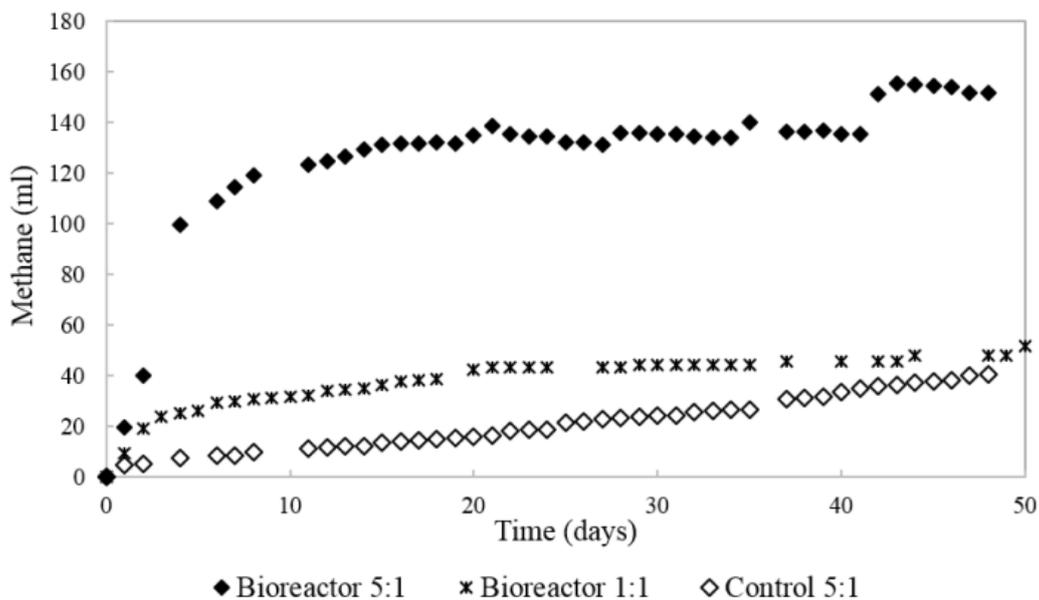


**Figure 3.** Production of methane under anaerobic condition with different COD/VSS ratio

### 3.3. Variation of pH, Alkalinity, soluble COD and Volatile Fat Acids

Values of pH were adjusted during the addition of the mineral media obtaining an initial pH of  $7.2 \pm 0.05$ . During the anaerobic biodegradation of the industrial effluent for a COD/VSS 5:1, the pH was in the range of 7.17 to 7.44. In terms of alkalinity, an initial drop occurred during the first 14 days with a decrease in concentration of  $\text{CaCO}_3$  of 30% as shown in Figure 4. Between days 14 and 35 values of alkalinity were similar to the initial value. After day 35 an

increase of 42% in the alkalinity occurred. In contrast, the concentration of VFAs increased during the first 7 days of the anaerobic biological treatment, followed by an irregular decrease of the concentration in the following 42 days, with a final value of 3620 mg/L. VFAs are produced during the anaerobic digestion, indicating an adaptation of the anaerobic organisms to the environmental conditions.

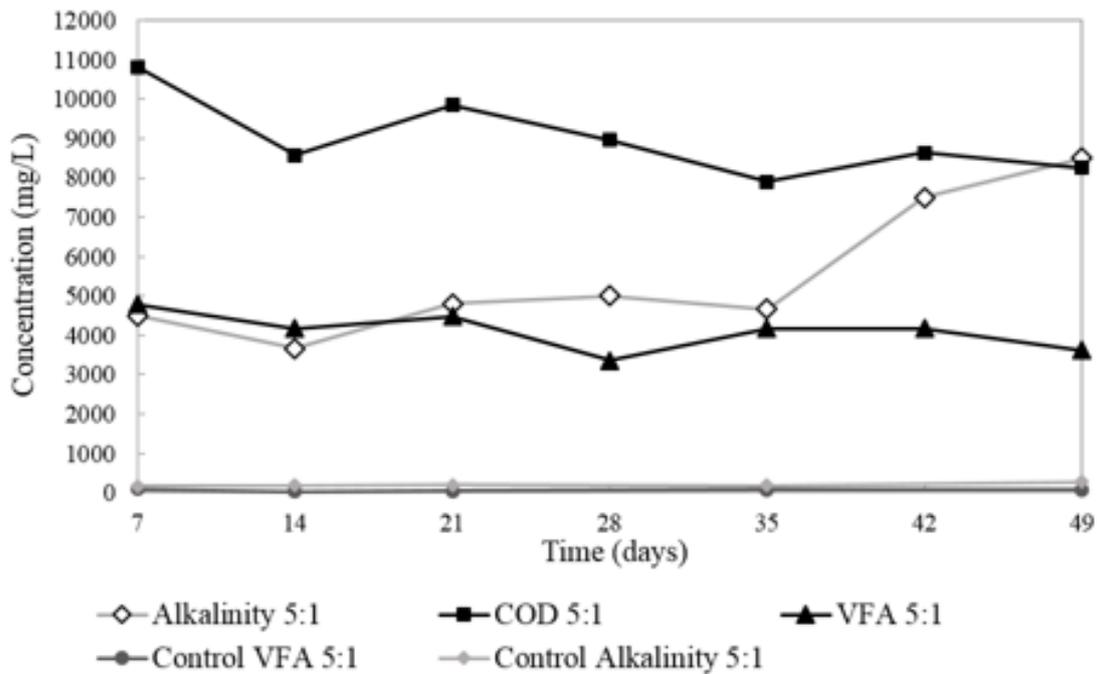


**Figure 4.** Variation of COD, alkalinity and Volatile Fatty Acid (VFAs) during the anaerobic degradation

### 3.4. Removal of COD and tannins

Although the anaerobic biodegradation of the effluent accounted for 65% of total COD, the maximum removal of soluble COD was only 39% which is attributed mainly to the degradation of tannins as shown in Figure 5 for a COD/VSS ratio 1:1. Consequently, the remaining percentage of degradation under anaerobic conditions can be related to degradation of biodegradable macromolecules such as protein and fats and a potential adsorption of tannins to the biomass (He et al. 2007), which is evidenced by the formation of VFAs during the first stage of the process and the production of methane previously discussed. Based on these

results, the COD removal rate was calculated in 0.121 g COD/gVSS·day and the maximum biodegradation rate was estimated to be 0.018 mg COD-CH<sub>4</sub>/ mg VSS·day.

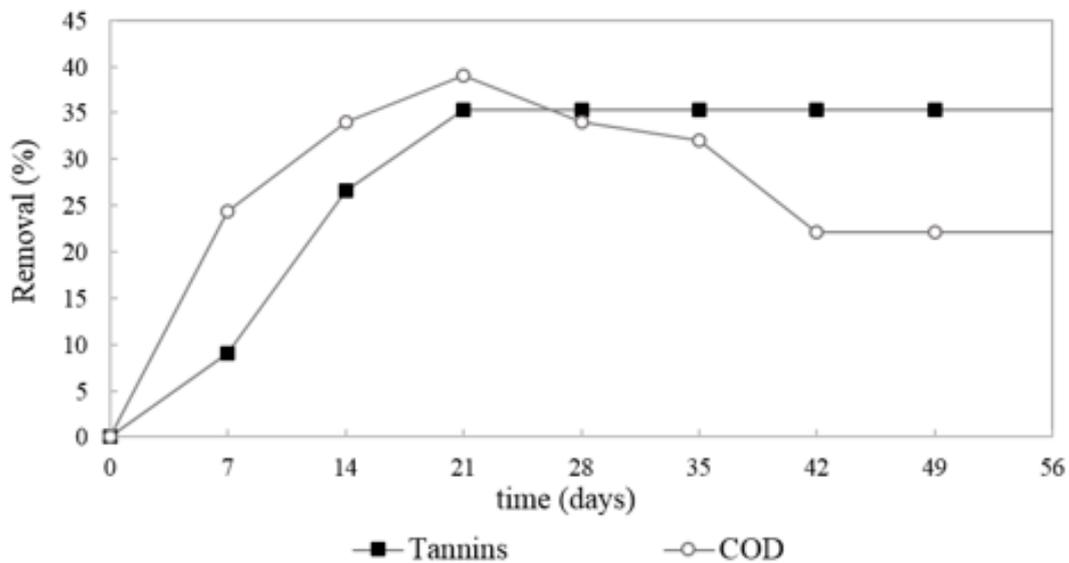


**Figure 5.** Removal of COD, and tannins during the anaerobic degradation

### 3.5. Second anaerobic process of the industrial effluent.

Treated water from the anaerobic experiments was exposed to a second anaerobic treatment with the same MAGM sludge, with constant agitation and methane production was measured using high-performance liquid chromatography. Different proportions of treated wastewater were used for the experiments; but only bioreactors with proportions of wastewater lower than 40% V/V displayed production of methane. The generation of methane started after day 8 as shown in Figure 6. In contrast to the first anaerobic treatment, minimal methane was produced during the first 12 days. After day 12, there was an increase in the rate of methane production, suggesting that the microorganisms present in the sludge required a period of adaptation. Nevertheless, the production of methane after 20 days was considerably lower than the production of methane during the first anaerobic treatment in the same period of time. These results suggest one more time that a large portion of degradation in the first anaerobic treatment was due to removal of suspended COD. In other words, the low production of methane in the second treatment was caused by the limited carbonaceous substrates available for the

microorganisms. Consequently, results show that although there was a reduction in the tannin concentration during the first treatment, the remaining fraction of tannins and its degradation by-products are not preferred for the metabolism by anaerobic microorganisms.

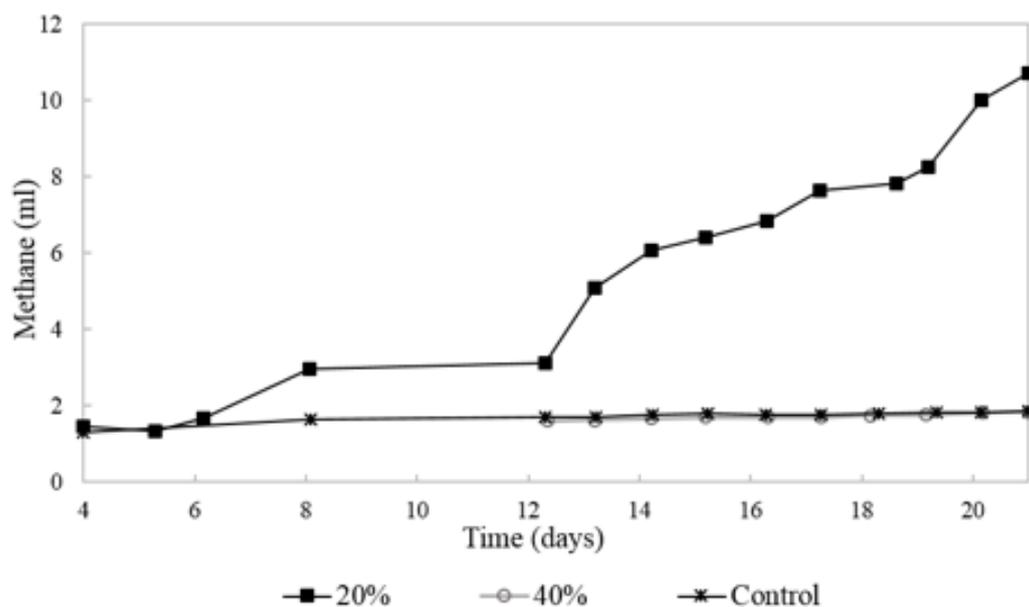

**Figure 6.** Methane production during second anaerobic treatment

#### 4. Conclusions

Industrial effluent from the vegetable tanning process was characterised and exposed to anaerobic biodegradation using MAGM sludge. The raw effluent displayed low pH with COD and BOD<sub>5</sub> values in the order of 342000 and 114000 mg/L respectively. The biodegradation of the effluent resulted in a removal of 37% and 65% of total COD under aerobic and anaerobic conditions respectively. The degradation of tannins under aerobic conditions was lower than 12% while under anaerobic conditions was 39%, suggesting a resistance of the microorganisms to the antiseptic properties of the tannins present in the wastewater. The differences in tannin degradation between aerobic and anaerobic conditions were attributed to the different adaptability of the organisms present in the seed inoculum and in the MAGM sludge, and the toxicity of tannin oxidation by-products.

During the first 7 days, a rapid production of methane and VFAs suggested an adequate degradation of the vegetable tannery effluent by the anaerobic organisms. The total degradation (65%) under anaerobic conditions were attributed to tannins degradation (39%), organic matter degradation by microorganisms and to the adsorption to the proteins of the biomass present at the MAGM sludge (26%). A second anaerobic treatment showed the requirement of a period of stabilization of the mature sludge and lower production of methane compare with the initial anaerobic treatment, due to removal of soluble COD. The preliminary results presented herein, show a great potential for promoting the design and realization of complimentary studies aimed at finding a combination of different aerobic/anaerobic treatments for different loadings of vegetable tanning effluent. Further studies will provide sustainable effluent treatment solutions to leather producers, lowering the environmental impact of the use of chemical wastewater treatment products, and generating methane that can be reincorporate in Another process.

### **Acknowledgments**

The authors acknowledge Universidad Nacional de Colombia for facilitating the experimental work, Professor Carlos Julio Collazos at Universidad Nacional de Colombia for his support, University of Huddersfield for assisting the analysis of data and writing of the paper and COLCIENCIAS–Colombia for supporting Anyela Ramirez-Canon via the award of Francisco Jose de Caldas Scholarship.

### **References**

- APHA (2005), Standard Method for Examination of Water and Wastewater. 21st ed Washington, DC.
- Scalbert A. (1991), Antimicrobial Properties of Tannins, *Phytochemistry* **30** (12), 3875–3883.  
doi: 10.1016/0031-9422(91)83426-L.

- Ayoub G., Hamzeh A. and Al-Hindi M. (2013), The Impact of Process Sequences on Pollutant Removal Efficiencies in Tannery Wastewater Treatment, *Water, Air, and Soil Pollution* **224** (1). doi: 10.1007/s11270-012-1379-y.
- Balakrishnan A., Kameswari B. and Kalyanaraman C. (2018), Assessment of Aerobic Biodegradability for Vegetable Tanning Process Wastewater Generated from Leather Industry, *Water Quality Management* **79**, 151–160.
- Bhat T., Singh B. and Sharma O. (1998), Microbial Degradation of Tannins: A Current Perspective, *Biodegradation* **9** (5), 343–57. doi: 10.1023/A:1008397506963.
- Borglin S.E., Hazen T.C., and Oldenburg C.M. (2004), Comparison of Aerobic and Anaerobic Biotreatment of Municipal Solid Waste, *Air & Waste Management Association*, **54**, 815–822.
- Charumol S, and Keerthinarayana S. (2017), Treatment of Tannery Waste Water Using Advanced Oxidation Process, **3** (2), 568–571.
- Cruz-Rizo A., Gutierrez-Granados S., Salazar R., and Peralta-Hernandez J.M. (2017), Application of Electro-Fenton/BDD Process for Treating Tannery Wastewaters with Industrial Dyes, *Separation and Purification Technology* **172**, 296–302. doi: 10.1016/j.seppur.2016.08.029.
- Dixit S., Yadav A., Dwivedi P. and Das M. (2015), Toxic Hazards of Leather Industry and Technologies to Combat Threat: A Review, *Journal of Cleaner Production*, **87**, 39-49. doi: 10.1016/j.jclepro.2014.10.017.
- Fathima A., Aravindhan R., Raghava Rao J. and Unni Nair B. (2015), Biomass of *Termitomyces Clypeatus* for chromium(III) Removal from Chrome Tanning Wastewater, *Clean Technologies and Environmental Policy*, **17** (2), 541–47. doi:10.1007/s10098-014-0799-3.

- Ghasimi S., Idris A., Chuah T. and Tey B. (2009), The Effect of C: N: P Ratio , Volatile Fatty Acids and Na Levels on the Performance of an Anaerobic Treatment of Fresh Leachate from Municipal Solid Waste Transfer Station, *African Journal of Biotechnology*, **8** (18): 4572–4581. doi:10.5897/AJB09.656.
- Gomes C.S., Piccin J.S. and Gutterres M. (2016), Optimizing Adsorption Parameters in Tannery-Dye-Containing Effluent Treatment with Leather Shaving Waste. *Process Safety and Environmental Protection*, **99**, 98–106. doi: 10.1016/j.psep.2015.10.013.
- Goswami S., and Mazumder D. (2014). Scope of Biological Treatment for Composite Tannery Wastewater. *International Journal of Environmental Sciences*, **5** (3), 607–22. doi: 10.6088/ijes.2014050100054.
- Gutterres M. and Mella B. (2014) Heavy Metals in Water: Presence, Removal and Safety. London, UK: Springer.
- He Q., Yao K., Sun D. and Shi B. (2007). Biodegradability of Tannin-Containing Wastewater from Leather Industry, *Biodegradation*, **18** (4): 465–472. doi: 10.1007/s10532-006-9079-1.
- Isarain-Chávez E., De La Rosa C., Godínez L., Brillas E. and Peralta-Hernández, J.M. (2014). Comparative Study of Electrochemical Water Treatment Processes for a Tannery Wastewater Effluent, *Journal of Electroanalytical Chemistry*, **713**, 62–69. doi: 10.1016/j.jelechem.2013.11.016.
- Field J.A. and Lettinga G. (1987). The Methanogenic Toxicity and Anaerobic Degradability of a Hydrolyzable Tannin, *Water Research*, **21** (3), 367–74.
- Kanagaraj J., Senthilvelan T., Panda R. C. and Kavitha S. (2015). Eco-Friendly Waste Management Strategies for Greener Environment towards Sustainable Development in

- Leather Industry: A Comprehensive Review, *Journal of Cleaner Production*, **89**, 1–17.  
doi: 10.1016/j.jclepro.2014.11.013.
- Kanagaraj J. and Mandal A.B. (2012), Combined Biodegradation and Ozonation for Removal of Tannins and Dyes for the Reduction of Pollution Loads, *Environmental Science and Pollution Research*, **19**(1): 42–52. doi: 10.1007/s11356-011-0534-0.
- Keerthi, Suganthi V., Mahalakshmi M. and Balasubramanian N. (2013), Development of Hybrid Membrane Bioreactor for Tannery Effluent Treatment, *Desalination*, **309**, 231-236. doi: 10.1016/j.desal.2012.10.014.
- Keerthi, Vinduja V. and Balasubramanian N. (2013), Electrocoagulation-Integrated Hybrid Membrane Processes for the Treatment of Tannery Wastewater, *Environmental Science and Pollution Research*, **20**(10), 7441-7449. doi: 10.1007/s11356-013-1766-y.
- Lofrano G., Meriç S., Emel Zengin G. and Orhon D. (2013), Chemical and Biological Treatment Technologies for Leather Tannery Chemicals and Wastewaters: A Review, *Science of the Total Environment*, **461**, 265-281. doi: 10.1016/j.scitotenv.2013.05.004.
- Makkar H., Siddhuraju P. and Becker K. (2007), Tannins, In: *Plant Secondary Metabolites. Methods in Molecular Biology*, **393**, 93–100. New Jersey: Humana Press. doi: 10.1007/978-1-59745-425-4\_16.
- Mella B., de Carvalho Barcellos B.S., da Silva Costa D.E. and Gutterres M. (2017), Treatment of Leather Dyeing Wastewater with Associated Process of Coagulation-Flocculation/Adsorption/Ozonation, *Ozone: Science and Engineering*, **40**, 133-140. doi:10.1080/01919512.2017.1346464.
- Mingshu L., Kai Y., Qiang H. and Dongying J. (2006), Biodegradation of Gallotannins and Ellagitannins, *Journal of Basic Microbiology*, **46**, 68–84. doi: 10.1002/jobm.200510600.

- Namour P. and Müller M.C. (1998), Fractionation of Organic Matter from Wastewater Treatment Plants before and after a 21-Day Biodegradability Test: A Physical-Chemical Method for Measurement of the Refractory Part of Effluents, *Water Research*, **32** (7), 2224–2231. doi:10.1016/S0043-1354(97)00428-4.
- Patra, A.K. (2012), *Dietary Phytochemicals and Microbes*, Springer, ISBN 978-94-007-3926-0.
- Porter L.J., Hrstich L.N. and Chan B.G. (1986), The Conversion of Procyanidin and Prodelphinidins to Cyaniding and Delphinidin, *Phytochemistry*, **25**: 223-230.
- Romero-Dondiz E.M, Almazan J.E., Rajal V.B. and Castro-Vidaurre E.F. (2015), Removal of Vegetable Tannins to Recover Water in the Leather Industry by Ultrafiltration Polymeric Membranes, *Chemical Engineering Research and Design*, **93**, 727–35. doi: 10.1016/j.cherd.2014.06.022.
- Samudro G. and Mangkoedihardjo S. (2010), Review on BOD , COD and BOD / COD Ratio : A Triangle Zone for Toxic , Biodegradable and Stable Levels, *International of Academic Research*, **2** (4), 235–39.
- Sekaran G., Karthikeyan S., Evvie C., Boopathy R. and Maharaja P. (2013), Oxidation of Refractory Organics by Heterogeneous Fenton to Reduce Organic Load in Tannery Wastewater, *Clean Technologies and Environmental Policy*, **15** (2), 245–253. doi: 10.1007/s10098-012-0502-5.
- Siedlecka E.M., Kumirska J., Ossowski T., Glamowski P., Gołębiowski M., Gajdus J., Kaczyński Z. and Stepnowski P. (2008), Determination of Volatile Fatty Acids in Environmental Aqueous Samples, *Polish Journal of Environmental Studies*, **17** (3), 351–56.
- UNIDO (2010). *Future Trends in the World Leather and Leather Products Industry and Trade*