

# ANODIC OXIDATION OF CEFACLOR ANTIBIOTIC IN AQUEOUS SOLUTION CONTAINING POTASSIUM CHLORIDE


A. Kurt\*

\* A. Kurt Duzce University, Central Research Laboratory for the Scientific and Technological Supports, Konuralp Campus, 81620, Duzce, Turkey.

\*Corresponding author:

E-mail: (*kurtayse1987@gmail.com*), tel: +905054017740

## GRAPHICAL ABSTRACT

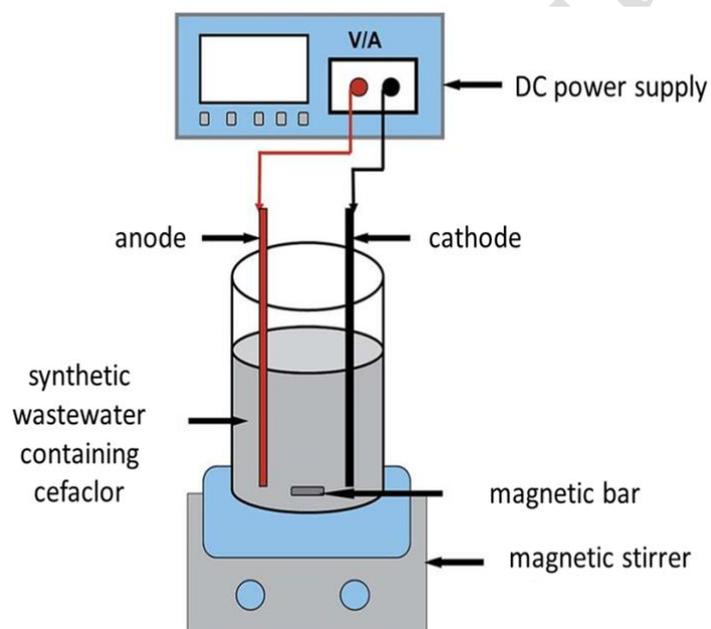

## ABSTRACT

At this study, electrochemical oxidation of cefaclor antibiotic was investigated with new generation Sn/Sb/Ni-Ti anodes. Platinized titanium was used as cathode material. Chemical oxygen demand (COD), total organic carbon (TOC) and cefaclor (CEF) active substance parameters were used to evaluate the process efficiency. Salt (KCl) addition ( $\text{mg L}^{-1}$ ), pH value, current density ( $\text{mA cm}^{-2}$ ) and reaction time (minute) were the factors controlling the reactions. Kinetic evaluations were performed during the application of electrochemical oxidation processes to obtain pseudo-first degree kinetics.  $750 \text{ mg L}^{-1}$  KCl, pH 7 and  $50 \text{ mA cm}^{-2}$  current density were found as the optimum conditions at room temperature ( $25 \text{ }^\circ\text{C}$ ). Thus,  $\leq 99\%$  removal efficiencies were found for COD and TOC parameters after 60 min reaction and complete mineralization of CEF was occurred in just 30 min at the optimum conditions. Consequently, Sn/Sb/Ni-Ti anodes were found very useful and successful for cefaclor oxidation and mineralization. The advantages of the processes are, complete mineralization at shorter reaction time with low current densities and there is no need to pH arrangement.


**Keywords:** antibiotic, cephalosporin, cefaclor, degradation, electrochemical oxidation

## 1. Introduction

For toxicologic properties, causing to the microorganism resistance and contamination problems in the environment, antibiotics should be considered as the most dangerous pollutant types (Yonar and Kurt, 2017). Due to interrupting biosynthesis of bacterial cell wall, bacteria show cross-resistance to the antibiotics (Baron, 1996). Among these antibiotic groups, cephalosporin antibiotics belong to the  $\beta$ -lactam group, are present the most commonly in the aquatic environment, which are especially used in human and veterinary processes (Kümmerer, 2009; Harris et al., 2012; Ribeiro et al., 2018).

In worldwide, production of cephalosporin antibiotics increases constantly due to increasing demand in the sanitation (Harris et al., 2012). Most of the researchers focused on fluoroquinolone, trimethoprim, sulfonamide and macrolide antibiotics for the occurrence and fate of antibiotics and the removal technologies in various types of wastewater containing antibiotics, while, just a little of them investigated the cephalosporin antibiotics (Gros et al., 2013; Stackelberg et al., 2004; Zhou et al., 2013; Yao et al., 2015).

Cefaclor is a  $\beta$ -lactam group antibiotic belongs to the cephalosporin, widely used for treatment of microbial infections (pneumonia and ear, lung, skin, throat and urinary tract infections) causing by gram-positive and gram-negative bacteria (Joshi, 2002). Also, cefaclor is one of the most common used antibiotics in many of the countries worldwide for producing and prescribing. It has been seen that, it could be detected in sewage treatment plants ( $1 \leq \mu\text{g L}^{-1}$ ) (Khan and Ongerth, 2002; Park, 2006). It has a fundamental structure such as the penicillin. In Figure 1. it was stated the chemical structure of cefaclor antibiotic.

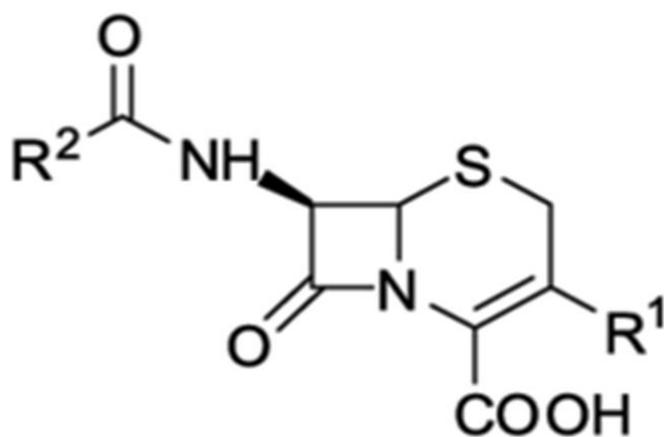

Cefaclor :  $R^1 = \text{Cl}$ ,  $R^2 = \text{CHNH}_2$

**Figure 1.** Chemical structure of cefaclor

Antibiotics reach to the aquatic environment without adequate treatment in conventional treatment plants (Kümmerer, 2009; Khetan and Collins, 2007). According to the Khetan and Collins (2007), it was obtained low degradation rates of antibiotic compounds after biological and photochemical processes and hydrolysis of wastewaters. For treatability of wastewaters containing antibiotics, advanced treatment technologies are suggested, such as advanced oxidation processes (AOPs), modern pressure-driven membrane processes and reverse osmosis or nanofiltration (NF/RO) (Kosutic, 2007; Kurt and Yonar, 2017). Among these processes advanced oxidation processes (AOPs) are successful for providing complete mineralization and constant energy need due to the using of direct current. However, these processes need higher energy compared to the electrochemical oxidation processes which are the other types of AOPs (Christensen et al., 2009). However, electrochemical oxidation processes show the conversion of pollutants to the harmless end products and need lower energy due to the use of direct current and need less additional chemicals (Moura et al., 2014).

The main disadvantages of the various anodic materials tested on electrochemical oxidation of organic pollutants are: rapid surface fouling and contain only selectively oxidized pollutants (Polcaro et al., 1999).  $\text{PbO}_2$  (Polcaro et al., 1999; Samet et al., 2006),  $\text{SnO}_2$  (Samet et al., 2006; Comninellis and Battisti, 1996), and BDD (Panizza and Cerisola, 2005) anodes have shorter lifetime and higher costs (Correa-Lozano et al., 1997). Sn/Sb/Ni-Ti anodes are known with their stability and performance in electrochemical processes. The most important advantage of this anode is need lower voltage (Christensen et al., 2009).

However, there is almost no study on electrochemical oxidation of wastewaters containing antibiotics with new generation Sn/Sb/Ni-Ti anodes in literature. They are more advantageous in terms of cost and application than BDD (boron doped diamond) anodes which are commonly used for electrochemical oxidation of wastewaters. For these reasons in this study, it was investigated electrochemical oxidation of cefaclor antibiotic with new generation Sn/Sb/Ni-Ti anodes (37% current efficiency) (Abbasi et al., 2014). The effects of reaction parameters were evaluated and kinetic evaluation and anode characterization were performed to evaluate of the electrochemical oxidation of CEF. There is no such studies on treatment of antibiotics with these anodes made this study unique.

## 2. Materials and methods


### 2.1. Chemicals and synthetic wastewater preparation

For preparation of the synthetic wastewater containing cefaclor was prepared with ultrapure water (Millipore Milli-Q, 18M $\Omega$  cm). The concentration of the CEF in synthetic wastewater was arranged to be 50 mg L<sup>-1</sup>. Cefaclor active substance was supplied from a local pharmaceutical warehouse (Duzce, Turkey). SnCl<sub>4</sub>.5H<sub>2</sub>O (tin IV chloride pentahydrate) and NiO (nickel II oxide) were bought from Alfa Aeser Company (Massachusetts, USA) and Sb<sub>2</sub>O<sub>3</sub> (Antimony III oxide) was purchased from Merck (Darmstadt, Germany) which were used for the coating processes of the anode. The other chemical solutions used during the experiments; HCl (hydrochloric acid), H<sub>2</sub>SO<sub>4</sub> (sulphuric acid), C<sub>2</sub>H<sub>2</sub>O<sub>4</sub> (oxalic acid) and C<sub>2</sub>H<sub>5</sub>OH (ethanol) were purchased from Merck (Darmstadt, Germany). The purity of all the chemicals were  $\geq 99$ .

### 2.2. Design of the electrodes and reactor


Titanium anodes (2,5 cm x 2,5 cm) and platinized titanium cathodes (5 cm x 5 cm) were used for the electrochemical reactions. Cathodes were purchased from NRK Electrochem. (Cornwall, UK). For design of the Sn/Sn/Ni-Ti anodes, titanium meshes (Dexmet, USA) were immersed into the boiling solution with oxalic acid (C<sub>2</sub>H<sub>2</sub>O<sub>4</sub>, %10) to remove the impurities. For coating process, Ti meshes were treated using ultrasonic process for 3 times, each phase was arranged to be 10 minutes. Then the meshes were coated by pyrolysis for 2 min, in solution having molar rate: Sn/Sb/Ni : 500/8/1. Finally, they were incubated at 105 °C in the etuv that preheated for 15 min. Then it was repeated for 520 °C temperature for 15 min. The cycle of coating process was repeated for 15 times and at the last stage, process was repeated for 75 min (Christensen et al., 2013; Wang et al., 2015).

To perform the electrochemical reactions, 250 mL borosilicate glass beakers were used. The anode and cathode were placed inside the reactor mutually. In Figure 2 it is seen the configuration of electrochemical reactor with electrodes (anode&cathode).

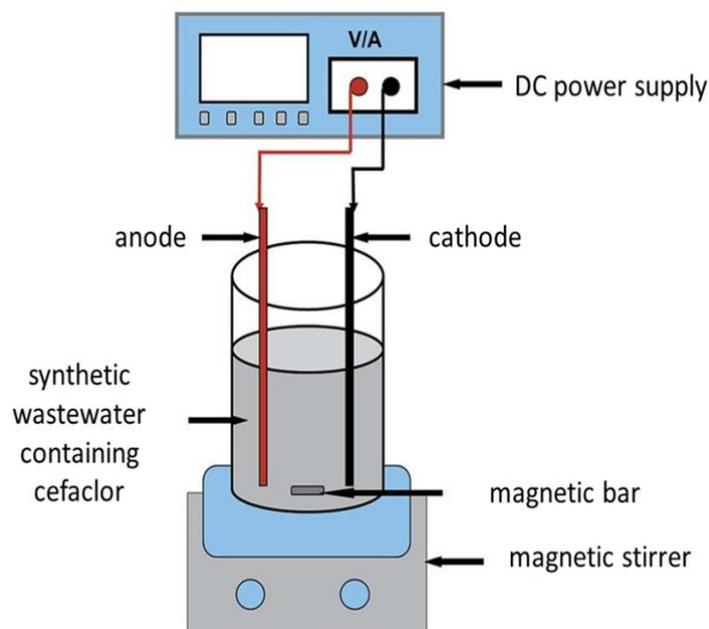

**Figure 2.** Configuration of electrochemical reactor


Anode material (the most important parameter affecting the reactions, should be strong enough to ensure polarization), reactor configuration, current efficiency, pH, salt type and conc. affects directly electrochemical oxidation (Cui et al., 2009). Organic molecules could be oxidized by direct or indirect electrochemical oxidation reactions. Low potential values are recommended for direct electrochemical oxidation of wastewater containing organics (Carlos and Sergio, 2006; Simond et al., 1997). In equation 1 it was stated the transformation of water to oxygen before direct electrochemical oxidation reaction occur with  $\cdot\text{OH}$  radicals (equation 1).



Occuring of  $\cdot\text{OH}$  radicals at anode by oxidation of water was shown in equation 2.



At indirect electrochemical oxidation reactions various oxidant types may occur such as chlorine, hypochlorous acid/hypochlorite, hydrogen peroxide and ozone (Bergmann et al., 2014):



#### 2.4. Analytic studies

Total organic carbon (TOC) analysis of the wastewater samples were carried out with TOC analyser (TOC-L, Shimadzu, Japan). pH meter (Cyberscan, UK) was used for measure of the pH values. Ultra performed liquid chromatography (UPLC) with photo diode array detector (PDA) (Thermo-scientific, Massachusetts, USA) was used for analytic analysis of cefaclor, at 254 and 270 nm wavelengths for detector. Hypersil GOLD, C-18 (50 x 2,1 mm; 1,9 um) UPLC column (Thermo-scientific, Massachusetts, USA) was used for the processes. Temperature of the column was chosen as 35°C.

The mobile phase content was set as 0,1 % formic acid and methanol; [MeOH:H<sub>2</sub>O]:40:60 (v/v) and 0,2 mL min<sup>-1</sup> flow rate was arranged at UPLC process. Chemical oxygen demand (COD) measurements were carried out according to the Standard Methods (APHA, 1989). All of the measurements were carried out in triplicate.

## 2.5. Kinetic studies

To determine the pseudo-first degree kinetics of the electrochemical degradation of CEF, kinetic coefficient was determined from the slope of the curve formed according to the equation (3);

$$\ln (C_{(CEF)}/C_{(CEF)0}) : k_d \times t \quad (3)$$


$k_d$ : Pseudo-first degree CEF removal rate constant (1 min<sup>-1</sup>).

## 3. Results and discussion

### 3.1. Effect of salt type and concentration

New generation Ti doped Sn/Sb/Ni anodes are known for high capacity of ozone generation. According to the most of the studies, it was seen that, type and dose of electrolyte (NaCl, KCl) affected positively the electrochemical oxidation reactions by increasing conductivity (Comminellis and Battisti, 1996; Abbasi et al., 2014; Christensen et al., 2013; Wang et al., 2015). Also, when salt is added for the process, chloride gas occurs too much thus, hypochlorid acid, that are very good oxidants (Parsa and Abbasi, 2012; Sasidharan and Gupta, 2016). But the addition of extra salt may increase the cost and create risks for the environment.


In salt addition processes with KCl, it was obtained that KCl affected the process efficiencies more positively even in lower concentrations. Thus, first of all in this study, effect of KCl (potassium chloride) on control parameters; COD, TOC and CEF were evaluated for 500 and 750 mg L<sup>-1</sup> KCl, at pH 7 and 50 mA cm<sup>-2</sup> current density. The effect of KCl addition on result parameters was shown in Figure 3. According to the Figure 3, it was seen that TOC and CEF decays showed similar trends in a very short time. However, COD reduction was much more clearer as a conventional parameter, thus, it was considered and evaluated as a major parameter in our study. Due to the lower voltage, it couldn't obtained higher efficiencies at 500 mg L<sup>-1</sup> KCl, thus the optimum dose was found as 750 mg L<sup>-1</sup> providing the higher removal efficiencies at shorter times.

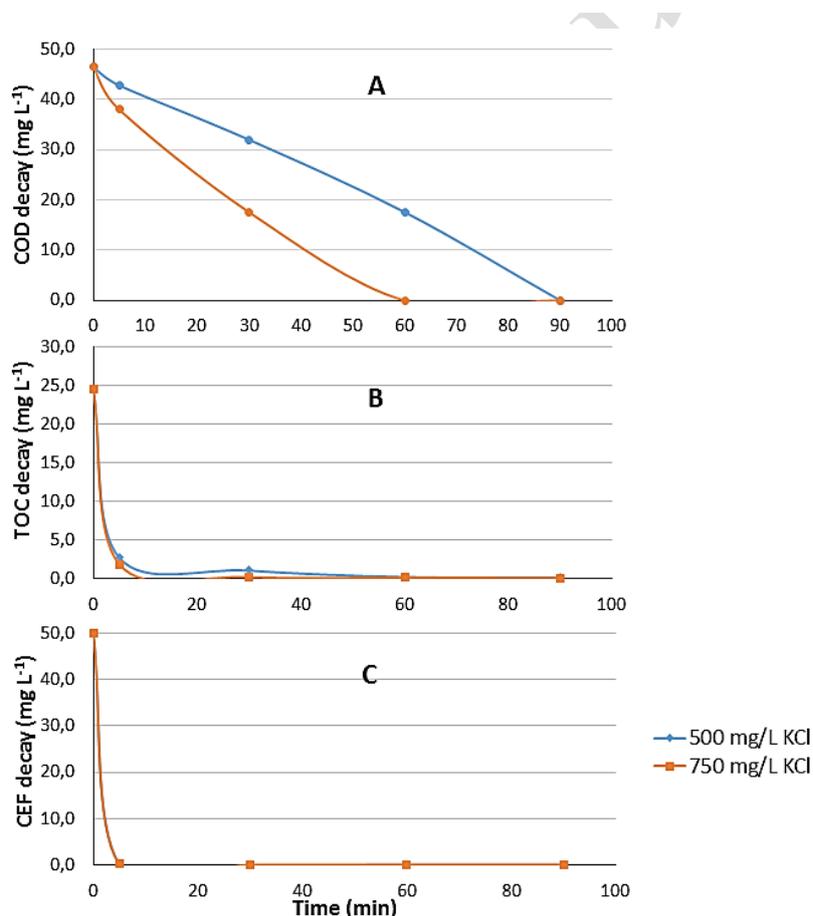

**Figure 3.** Effect of KCl on process parameters (I: 50 mA cm<sup>-2</sup>, pH 7), (a) COD decay (mg L<sup>-1</sup>), (b) TOC decay (mg L<sup>-1</sup>), (c) CEF decay (mg L<sup>-1</sup>)

According to the Figure 3, COD was consumed in just 60 minutes with 750 mg L<sup>-1</sup> KCl addition. TOC was reduced to 0,20 mg L<sup>-1</sup> just after 30 min reaction and 0,06 mg L<sup>-1</sup> after 90 minutes and CEF concentration was consumed in 30 min reaction with 750 mg L<sup>-1</sup> KCl.

However, pseudo-first order removal rate constants ( $k_d$ ) were calculated for KCl addition, to obtain clearer results. According to the Figure 4, with  $k_d$  coefficients it was obtained that KCl affected the electrochemical reactions considerably, due to increase of conductivity and chloride gas formation and thus, hypochlorid acid.

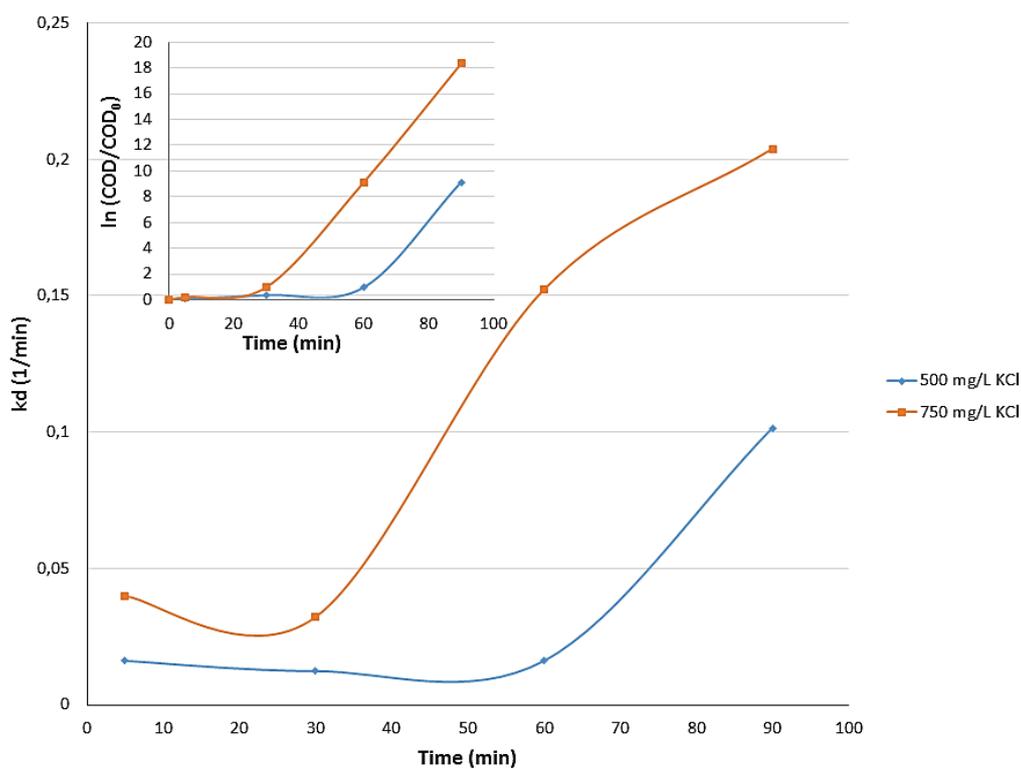


**Figure 4.** Pseudo-first order kinetics with KCl variation (I: 50 mA cm<sup>-2</sup> and pH 7)

However, the advantage of using KCl as a salt type is to reduce the negative effects of NaCl on soil structure. When NaCl is used as a salt additive, soil pore size and water permeability is reduced due to adsorption of Na<sup>+</sup> to negatively charged clay surfaces and it could be replaced with other ions (Tchobanoglous and Schroeder, 1985).


### 3.2. Effect of pH

The effect of pH was investigated at the range of [3-10], on COD, TOC, and CEF decay, which is one of the most important parameter affecting the electrochemical oxidation reactions. Thus, the optimum pH was obtained after the electrolyte concentration.

Figure 5 shows the effect of pH on the result parameters for 750 mg L<sup>-1</sup> KCl addition and 50 mA cm<sup>-2</sup> current density. According to the Figure 5 and Figure 6, pH 7 was found as the optimum value for electrochemical oxidation of CEF, which is the neutral pH of the wastewater. Also, it is possible to make process more economic and easier operationally, by working at neutral pH, due to there is no need extra pH arrangement steps. According to the Figure 4, COD was consumed just after 60 min and TOC was mineralized almost completely after 30 min and CEF conc. was reached to the zero just in 5 min, at pH 7.

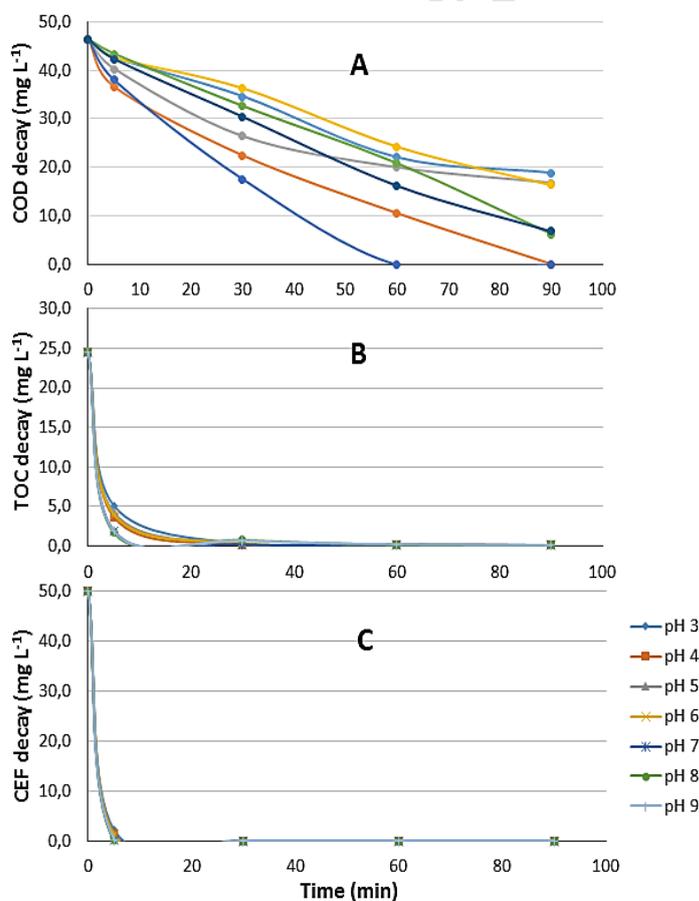

**Figure 5.** Effect of pH on process parameters (KCl: 750 mg L<sup>-1</sup>, I: 50 mA cm<sup>-2</sup>), (a) COD decay (mg L<sup>-1</sup>), (b) TOC decay (mg L<sup>-1</sup>), (c) CEF decay (mg L<sup>-1</sup>)

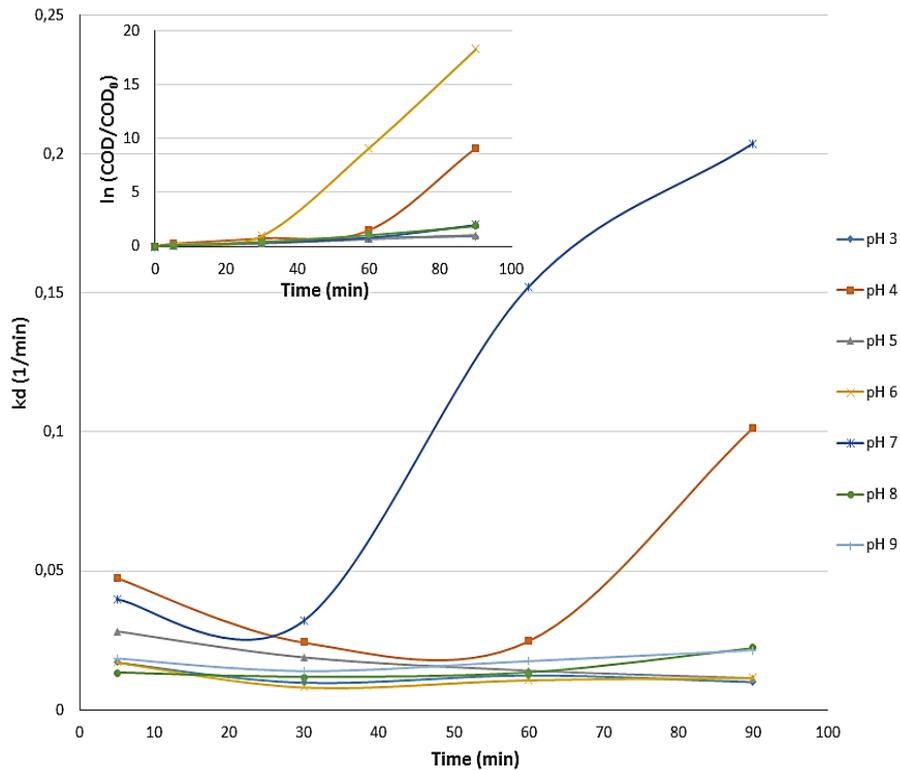

**Figure 6.** Pseudo-first order kinetics with pH variation (KCl:  $750 \text{ mg L}^{-1}$ , I:  $50 \text{ mA cm}^{-2}$ )


### 3.3. Effect of current density

In electrochemical oxidation processes, current density is the another parameter, affecting the reactions significantly having an active role in reaction kinetics (Deng and Englehardt, 2007). At the range of  $25 - 50 \text{ mA cm}^{-2}$ , effects of current density were evaluated for  $750 \text{ mg L}^{-1}$  KCl addition and pH 7.

Active oxidants occur increasingly in aqueous solution at higher current density values. Thus, the removal efficiencies increased generally with the current density increase. Optimum current density was found as  $50 \text{ mA cm}^{-2}$ , providing the most efficient treatment process (full mineralization was obtained at just 60 min).


Figure 7 and Figure 8 show the effect of current density on process parameters. According to these figures, variation in current density values affected the reactions highly. The COD was

consumed completely in just 60 min oxidation, TOC was reduced to 0,20 mg L<sup>-1</sup> in 30 min and CEF was almost completely consumed in just 5 min at pH 7.

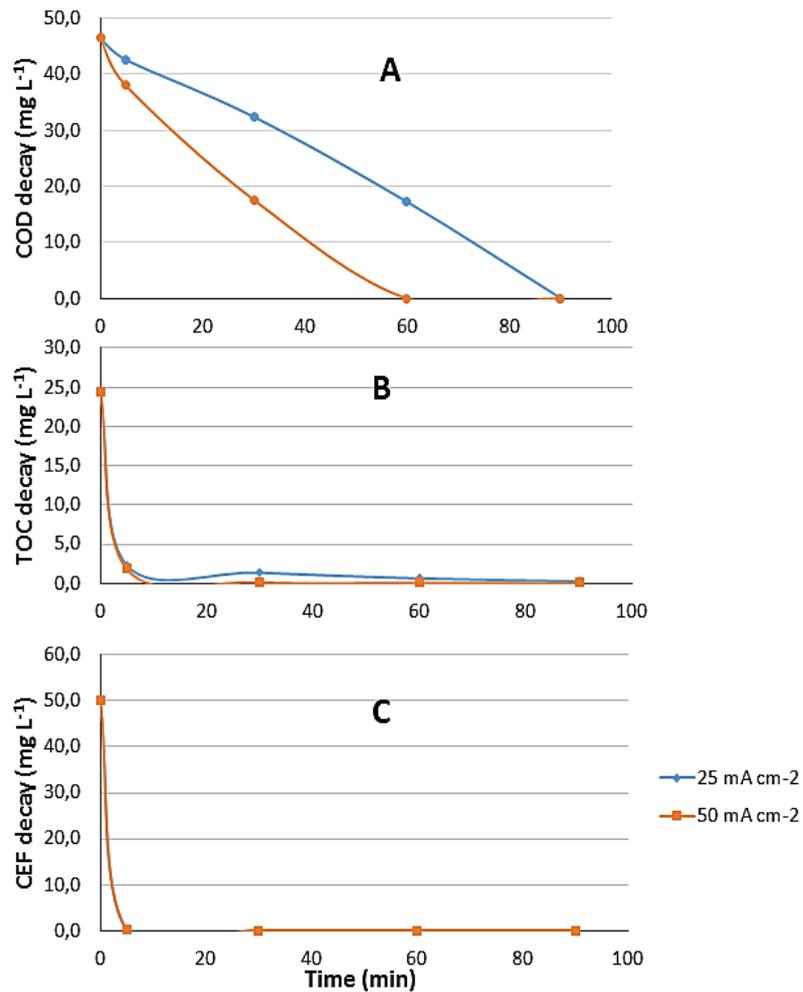

**Figure 7.** Effect of current density on process parameters (KCl: 750 mg L<sup>-1</sup>, pH 7), (a) COD decay (mg L<sup>-1</sup>), (b) TOC decay (mg L<sup>-1</sup>), (c) CEF decay (mg L<sup>-1</sup>)

To identify the differences exactly,  $k_d$  values were calculated for COD decay differences on current density values and parallel results were found with the others (Figure 8).

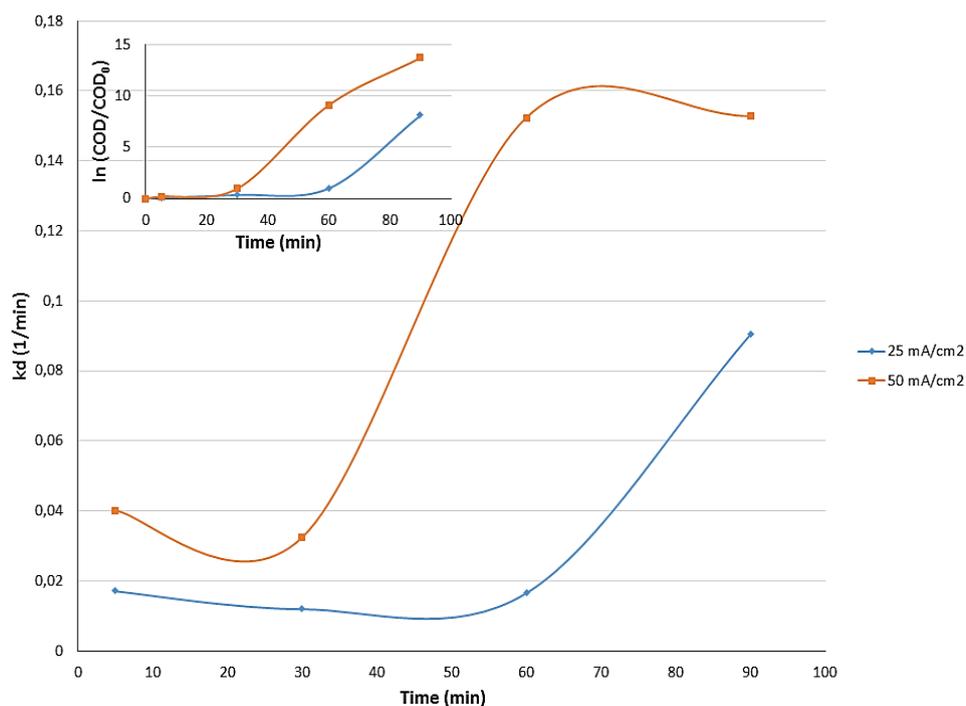

**Figure 8.** Pseudo-first order kinetics with current density variation (KCl: 750 mg L<sup>-1</sup>, pH 7)

#### 4. Cost analysis

Cost analysis of the study was performed according to the energy consumption rates during the electrochemical oxidation process (other labor costs are not included). The cost of the anodic oxidation process was found to be 22,75 USD/kgCOD. When compared to other conventional treatment processes, less oxidation time and no sludge occurrence are the advantageous of this process in addition to the cost efficiency. According to the cost analysis, electrochemical processes with new generation Sn/Sb/Ni-Ti anodes, showed promising results for future processes.

Energy consumption per unit COD removal;  $E_{COD}$  was calculated according to the Equation 4.

$$E_{COD} = (E_{cell} \times I \times t) / (V \times \Delta COD) \quad (4)$$

$E_{COD}$ : energy consumption, kWh kg<sup>-1</sup> COD,


$E_{cell}$ : electrochemical cell voltage, volt,

I: current value, ampere,

t: time of electrolysis, hours,

V: cell volume, L and

$\Delta$ COD: COD removal conc., start - finishing time.

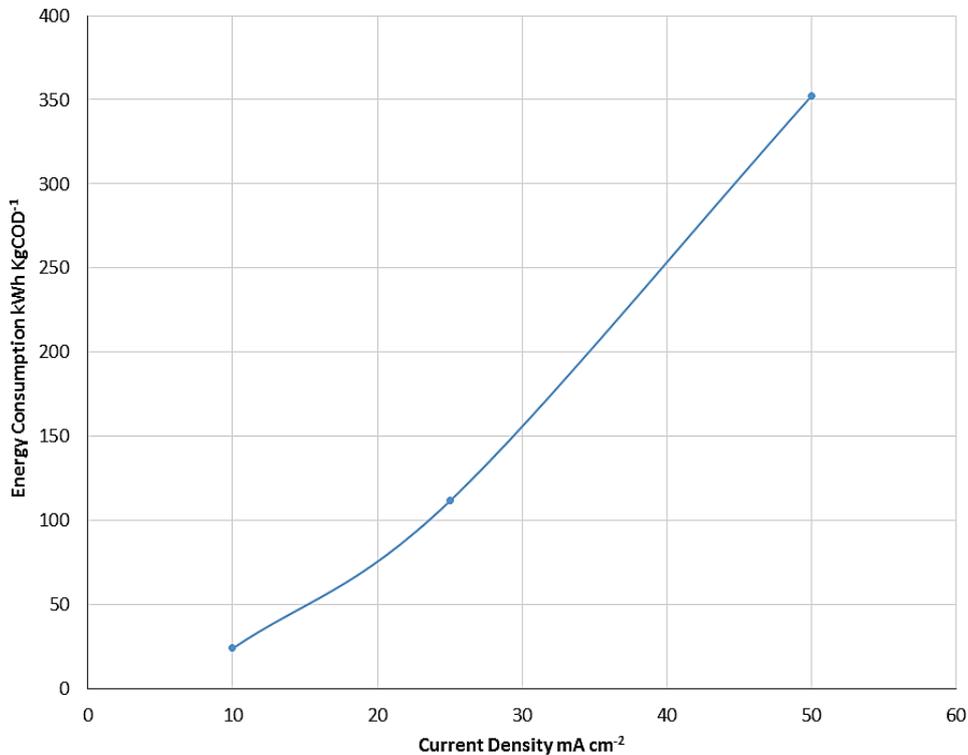

**Figure 9.** Energy consumption values (kWhkg COD<sup>-1</sup>) according to the current densities


As it is seen in Figure 8, higher current densities increased the power consumption, while the removal efficiencies were increased. According to the Figure 9, a dramatic increase in energy consumption was occurred with increasing current densities.

## 5. SEM-EDS analyzes


Typical SEM images of the anodes on the intersections (assuming thicker coating have been than the strands) (Christensen et al., 2013) were shown in Figure 10 and 11 for unused (clean) and used (unclean) anodes, respectively at  $\times 250$  magnification. A cracked morphology was observed for

the coating process for unused anodes that could be occurred by thermal shocking which is seen generally during the cooling process with suddenly taking of the anodes from the oven (Parsa and Abbasi, 2012; Shekarchizade and Amini, 2011; Montilla et al., 2004). However for the unclean (used) anodes, a smoother surface was observed that resulting from the coating of the surface area with ions that passing from the solution.

Thus, this state was supported by EDS spectra (Figure 12) and the weight and atomic percentages and peak intensities (Figure 12). According to the results of the analysis, it was observed that the weight and atomic percentages and the peak intensities were changed by the selected areas (area-1, area-2 and area-3) during the electrochemical oxidation processes. It was seen that the surface of the electrode was filled with other ions (carbon) and salts ( $\text{Fe}_3(\text{PO}_4)_2(\text{OH})_2$ ) occurring in the solution, especially for the area-2 and area-3, assuming a smoother surface and considering the weight and atomic percentages and the peak intensities variation. Moreover, the anode material was not corroded significantly and worked efficiently.

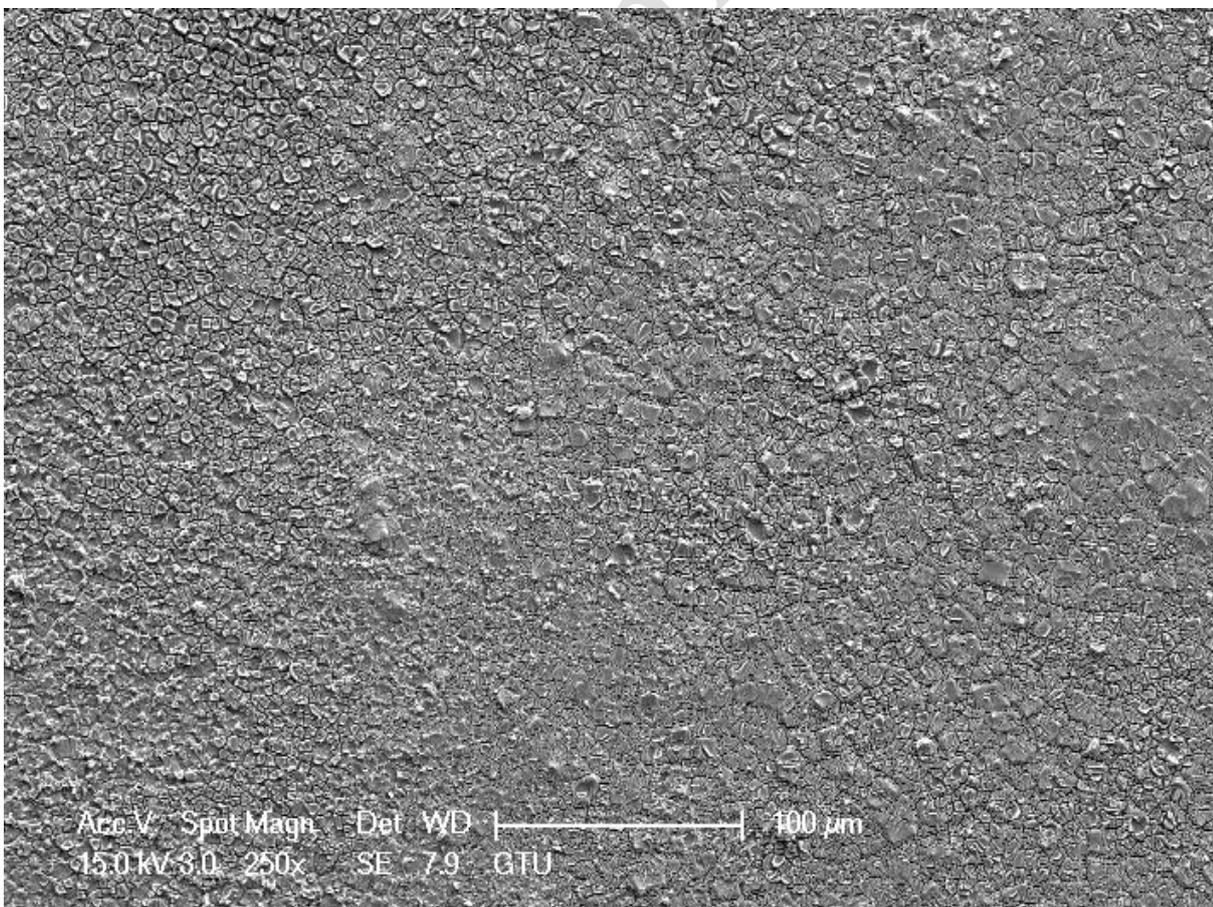

**Figure 10.** Typical SEM images ( $\times 250$ , bar = 100  $\mu\text{m}$ ) and EDS spectra of clean (unused) Sn/Sb/Ni: 500:8:1 coated Ti meshes (anodes)

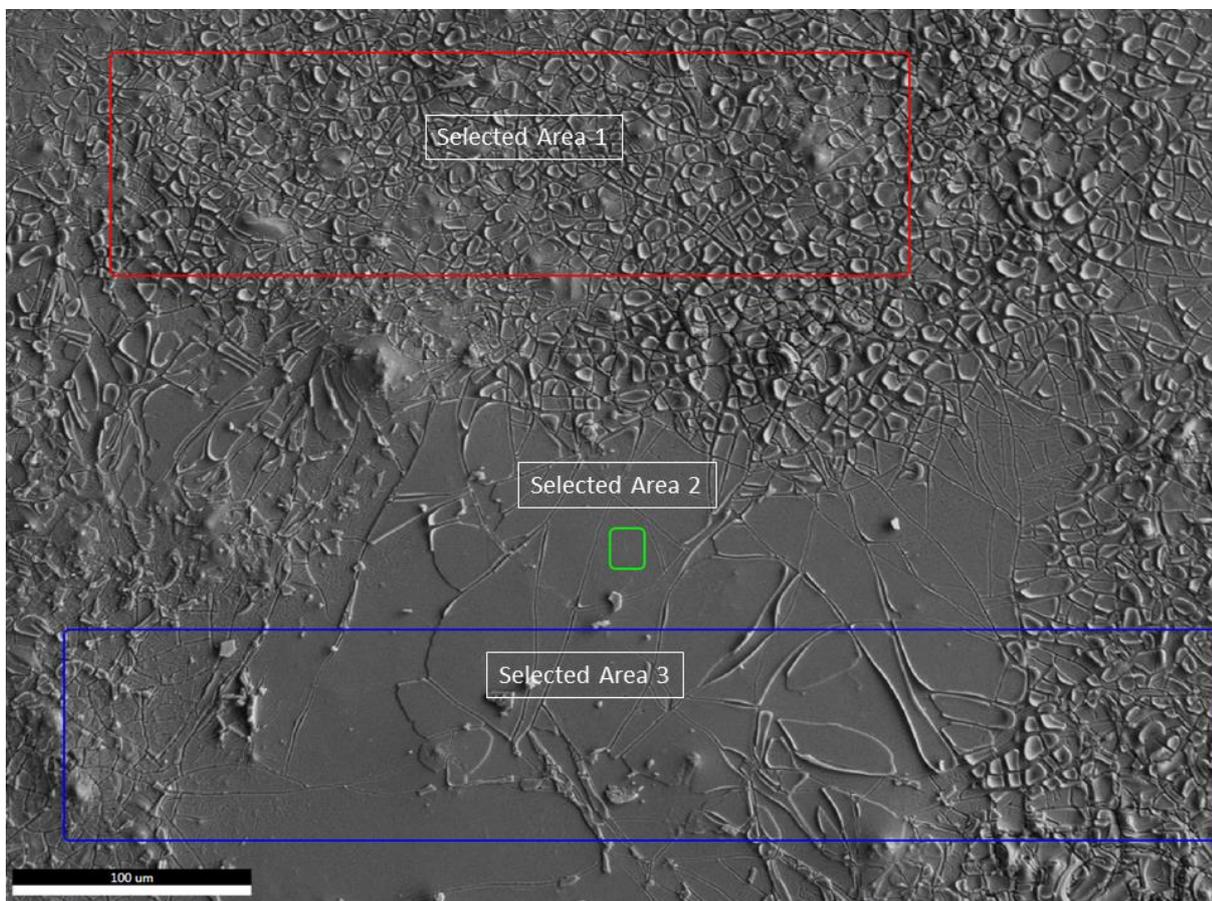

**Figure 11.** Typical SEM images ( $\times 250$ , bar = 100  $\mu\text{m}$ ) and EDS spectra of used (unclean) Sn/Sb/Ni: 500:8:1 coated Ti meshes (anodes)

accept

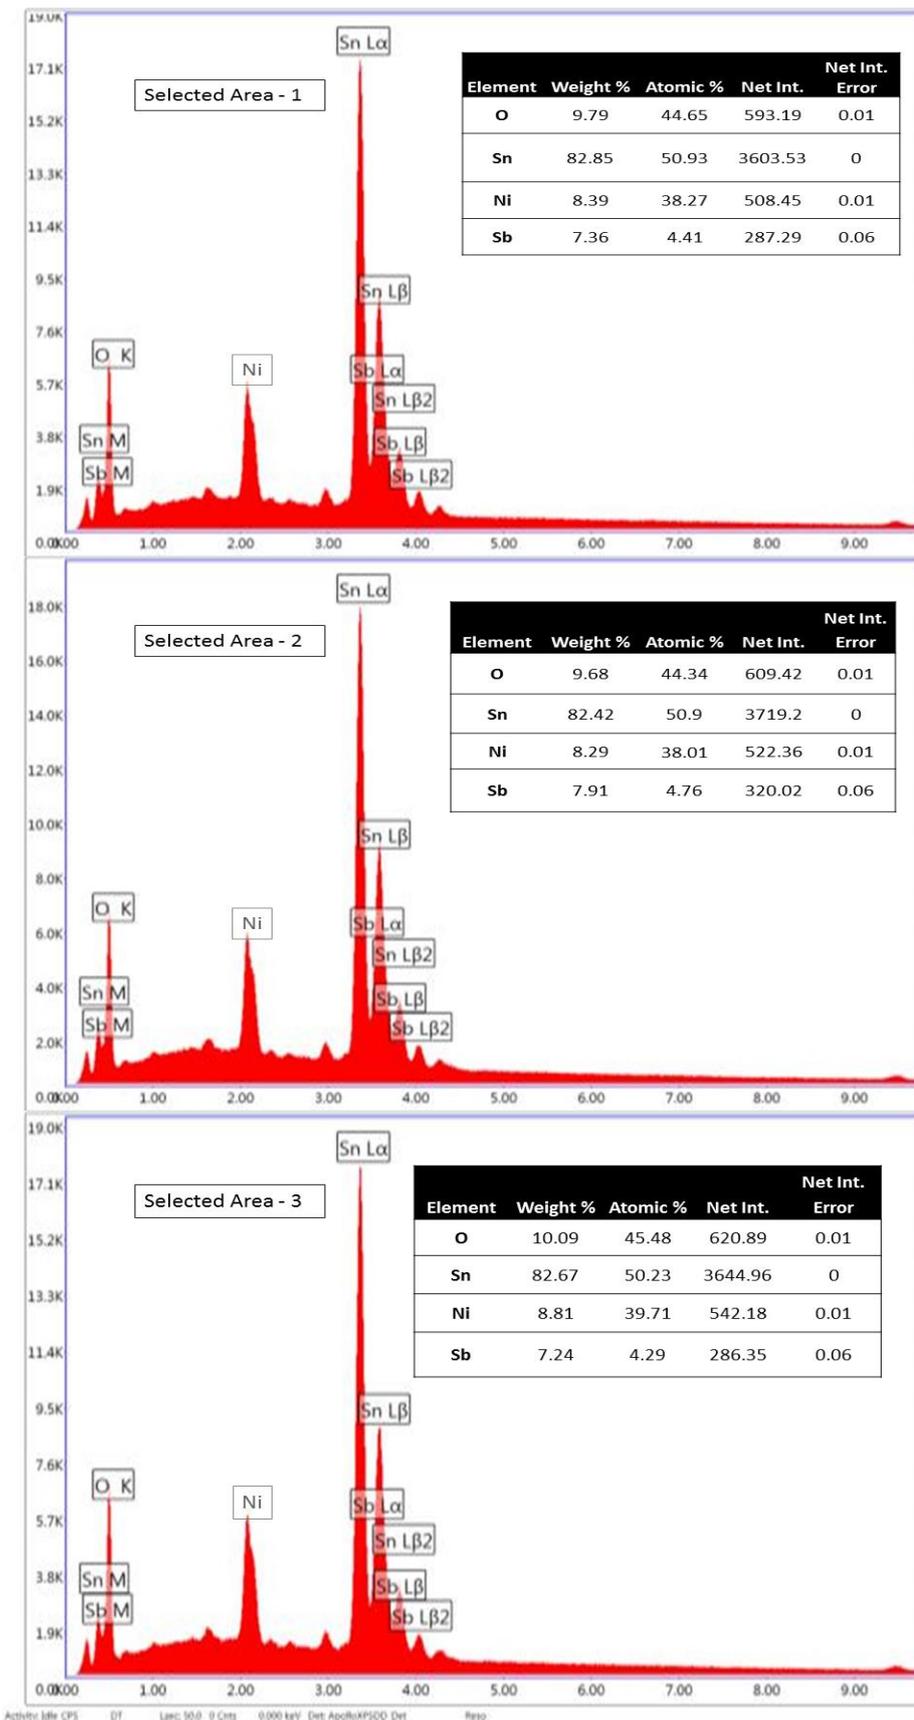


Figure 12. Weight - atomic percentages and the peak intensities of EDS spectra of the anodes

## 6. Conclusions

At this study, electrochemical oxidation of cefaclor antibiotic was investigated using new generation Sn/Sb/Ni-Ti anodes. First of all, in salt addition process, it was obtained that KCl affected the electrochemical oxidation process efficiencies positively even in lower concentrations. KCl dose determination studies have shown that; due to the lower voltage, it couldn't obtain higher efficiencies at 500 mg L<sup>-1</sup>, thus the optimum dose of KCl was found as 750 mg L<sup>-1</sup> providing the higher removal efficiencies at shorter times. Also, it was seen that, KCl affected the electrochemical reactions considerably, due to the increase of conductivity and chloride gas formation and thus, hypochlorid acid, according to the kinetic evaluation results.

The pH value, one of the most important parameter affecting the electrochemical oxidation reactions was investigated and pH 7 was found as the optimum, which is the neutral pH of the wastewater. Thus, it could possible to make process cheaper and easier operationally, with working at neutral pH and there is no need extra pH arrangement steps.

The removal efficiencies increased generally with current density increase, due to active oxidants occur increasingly in aqueous solution at higher current density values. Optimum current density was obtained to be 50 mA cm<sup>-2</sup>, providing the most efficient process. As a result of the SEM-EDS analysis, it can be concluded that the anode material was not significantly corroded during the processes and worked efficiently. Consequently, Sn/Sb/Ni-Ti anodes were found very useful and successful for cefaclor oxidation and mineralization. The advantages of the processes with new generation Sn/Sb/Ni-Ti anodes, complete mineralization at shorter reaction time and there is no need to pH arrangement.

## Acknowledgements

The author acknowledges the support of Bursa Uludag University Research Projects Department for this study (Project No. OUAP (MH)-2018/8).

## References

- [1] Yonar T. and Kurt A. (2017), Treatability studies of hospital wastewaters with AOPs by Taguchi's experimental design, *Globul Nest Journal*, **19**, 505–510.
- [2] Baron S. (1996), Source Medical Microbiology, fourth ed., Galveston (TX), University of Texas Medical Branch at Galveston.
- [3] Kümmerer K. (2009), Antibiotics in the aquatic environment - A review - Part I, *Chemosphere*, **75**, 417–434.
- [4] Harris S.J., Cormican M. and Cummins E. (2012), Antimicrobial residues and antimicrobial-resistant bacteria: impact on the microbial environment and risk to human health-A review, *Human and Ecological Risk Assessment*, **18**, 767–809.
- [5] Ribeiro A.R., Sures B. and Schmidt T.C. (2018), Cephalosporin antibiotics in the aquatic environment: A critical review of occurrence, fate, ecotoxicity and removal technologies, *Environmental Pollution*, **241**, 1153–1166.
- [6] Gros M., Rodríguez-Mozaz S., and Barceló D. (2013), Rapid analysis of multiclass antibiotic residues and some of their metabolites in hospital, urban wastewater and river water by ultra-high-performance liquid chromatography coupled to quadrupole-linear ion trap tandem mass spectrometry, *Journal of Chromatography A*, **129**, 2173–188.

- [7] Stackelberg P.E., Furlong E.T., Meyer M.T., Zaugg S.D., Henderson A.K., and Reissman D.B. (2004), Persistence of pharmaceutical compounds and other organic wastewater contaminants in a conventional drinking-water-treatment plant, *Science of the Total Environment*, **329**, 99–113.
- [8] Zhou L.J., Ying G.G., Liu S., Zhao J.L., Yang B., Chen Z.F., Lai H. J. (2013), Occurrence and fate of eleven classes of antibiotics in two typical wastewater treatment plants in South China, *Science of the Total Environment*, **452–453**, 365–376.
- [9] Yao L., Wang Y., Tong L., Li Y., Deng Y., Guo W., Gan Y. (2015), Seasonal variation of antibiotics concentration in the aquatic environment: A case study at Jiangnan Plain, central China, *Science of the Total Environment*, **527–528**, 56–64.
- [10] Joshi S. (2002), HPLC separation of antibiotics present in formulated and unformulated samples, *Journal of Pharmaceutical and Biomedical Analysis*, **28**, 795–809.
- [11] Khan S.J. and Ongerth J. E. (2002), Estimation of pharmaceutical residues in primary and secondary sewage sludge based on quantities of use and fugacity modelling, *Water Science & Technology*, **46**, 105–113.
- [12] Park J. (2006), An approach for developing aquatic environmental risk assessment framework for pharmaceuticals in Korea. A report from Korea Environment Institute, KEI-RE-05.
- [13] Khetan S.K. and Collins T.J. (2007), Human pharmaceuticals in the aquatic environment: a challenge to green chemistry, *Chemical Reviews*, **107**, 2319–2364.
- [14] Kosutic I., Anderson S.A., Sabatelli R.M. (2007), Families, urban neighborhood youth centers, and peers as contexts for development, *Family Relations*, **56**, 346–357.
- [15] Kurt A. and Yonar T. (2017), Treatability of endocrine disrupting antibiotic compounds by UV/H<sub>2</sub>O<sub>2</sub> process according to Taguchi's experimental design, *Afyon Kocatepe University Journal of Sciences and Engineering*, **17**, 854–860.

- [16] Christensen P.A., Lin W.F., Christensen H., Imkum A., Jin J.M., Li G., Dyson C.M. (2009), Room temperature, electrochemical generation of ozone with 50 % current efficiency in 0.5 M sulfuric acid at cell voltages  $< 3V$ , *Ozone: Science & Engineering*, 31, 287–293.
- [17] De Moura D.C., de Araújo C.K.C., Zanta C.L.P.S., Salazar R., Martínez-Huitle C.A. (2014), Active chlorine species electrogenerated on Ti/RuO<sub>3</sub>TiO<sub>7</sub>O<sub>2</sub> surface: electrochemical behavior, concentration determination and their application, *Journal of Electroanalytical Chemistry*, **731**, 145-152.
- [18] Polcaro A.M., Palmas S., Renoldi F. and Mascia M. (1999), On the performance of Ti/SnO<sub>2</sub> and Ti/PbO<sub>2</sub> anodes in electrochemical degradation of 2-chlorophenol for wastewater treatment, *Journal of Applied Electrochemistry*, **29**, 147–151.
- [19] Samet Y., Elaoud S.C., Ammar S. and Abdelhedi R. (2006), Electrochemical degradation of 4-chloroguaiacol for wastewater treatment using PbO<sub>2</sub> anodes, *Journal of Hazardous Materials*, **138**, 614-619.
- [20] Comninellis C. and Battisti A.D.E. (1996), Service life of Ti/SnO<sub>2</sub> ± Sb<sub>2</sub>O<sub>5</sub> anodes, *Journal of Applied Electrochemistry*, **27**, 970–974.
- [21] Panizza M. and Cerisola G. (2005), Application of diamond electrodes to electrochemical processes, *Electrochimica Acta*, **51**, 191–199.
- [22] Correa-Lozano B., Comninellis C., De Battisti A. (1997), Service life of Ti/SnO<sub>2</sub>–Sb<sub>2</sub>O<sub>5</sub> anodes, *Journal of Applied Electrochemistry*, **27**, 970-974.
- [23] Abbasi M., Soleymani A.R. and Parssa J.B. (2014), Operation simulation of a recycled electrochemical ozone generator using artificial neural network, *Chemical Engineering Research and Design*, **92**, 2618–2625.
- [24] Christensen P.A., Zakaria K., Christensen H. and Yonar T. (2013), The effect of Ni and Sb oxide precursors, and of Ni composition, synthesis conditions and operating parameters on the

activity, selectivity and durability of Sb-doped SnO<sub>2</sub> anodes modified with Ni, *Journal of The Electrochemical Society*, **160**, 405–413.

- [25] Wang J., Mao D., Mu Q. and Luo Y. (2015), Fate and proliferation of typical antibiotic resistance genes in five full-scale pharmaceutical wastewater treatment plants, *Science of the Total Environment*, **526**, 366–373.
- [26] Cui Y., Wang Y., Wang B., Haihui Z., Kwong-Yu C., Xiao-Yan L. (2009), Electrochemical generation of ozone in a membrane electrode assembly cell with convective flow, *Science of the Total Environment*, **156**, E75-E80.
- [27] Carlos M.H. and Sergio F. (2006), Electrochemical oxidation of organic pollutants for the wastewater treatment: direct and indirect processes, *Chemical Society Reviews*, **35**, 1324-1340.
- [28] Simond O., Schaller V. and Comninellis C. (1997), Theoretical model for the anodic oxidation of organics on metal oxide electrodes, *Electrochimica Acta*, **42**, 2009–2012.
- [29] Bergmann M.E.H., Koparal A.S. and Iourtchouk T. (2014), Electrochemical Advanced oxidation processes, formation of halogenate and perhalogenate species: A critical review, *Critical Reviews in Environmental Science and Technology*, **44**, 348–390.
- [30] APHA/WEF/AWWA (1989), Standard methods for the examination of water and wastewater, American Public Health Association, 25 Ed., pp. 1-101, Washington DC: Centennial.
- [31] Parsa J.B. and Abbasi M. (2012), Application of in situ electrochemically generated ozone for degradation of anthraquinone dye Reactive Blue 19, *Journal of Applied Electrochemistry*, **42**, 435–442.
- [32] Sasidharan Pillai I.M. and Gupta A.K. (2016), Anodic oxidation of coke oven wastewater: Multiparameter optimization for simultaneous removal of cyanide, COD and phenol, *Journal of Environmental Management*, **176**, 45–53.

- [33] Tchobanoglous G., Schroeder E.D. (1985), Water quality: characteristics, modeling, modification, University of Michigan Press, Michigan, 768 pp.
- [34] Y. Deng and J. D. Englehardt, Electrochemical oxidation for landfill leachate treatment, *Waste Manag.* 27 (2007) 380–388.
- [35] Shekarchizade H. and Amini M.K. (2011), Effect of elemental composition on the structure, electrochemical properties, and ozone production activity of Ti/SnO<sub>2</sub>-Sb-Ni Electrodes Prepared by Thermal Pyrolysis Method, *International Journal of Electrochemistry*, 13 pp..
- [36] Montilla F., Morallon E., De Battisti A., Vazquez J.L. (2004), Preparation and characterization of antimony-doped tin dioxide electrodes, Part 1. Electrochemical characterization, *The Journal of Physical Chemistry B*, **108**, 5036–5043.

accepted manuscript