

Volatile organic compounds (VOCs) removal by combining bioscrubber and ozone pretreatment

Vincenzo Senatore^{1*}, Tiziano Zarra¹, Giuseppina Oliva¹, Vincenzo Belgiorno¹, Vincenzo Naddeo¹


¹ Sanitary Environmental Engineering Division (SEED), Department of Civil Engineering, University of Salerno, Via Giovanni Paolo II, Fisciano, SA, Italy

Corresponding author: Vincenzo Senatore

E-mail: vsenatore@unisa.it, tel: +39 345 9724638

ACCEPTED MANUSCRIPT

GRAPHICAL ABSTRACT

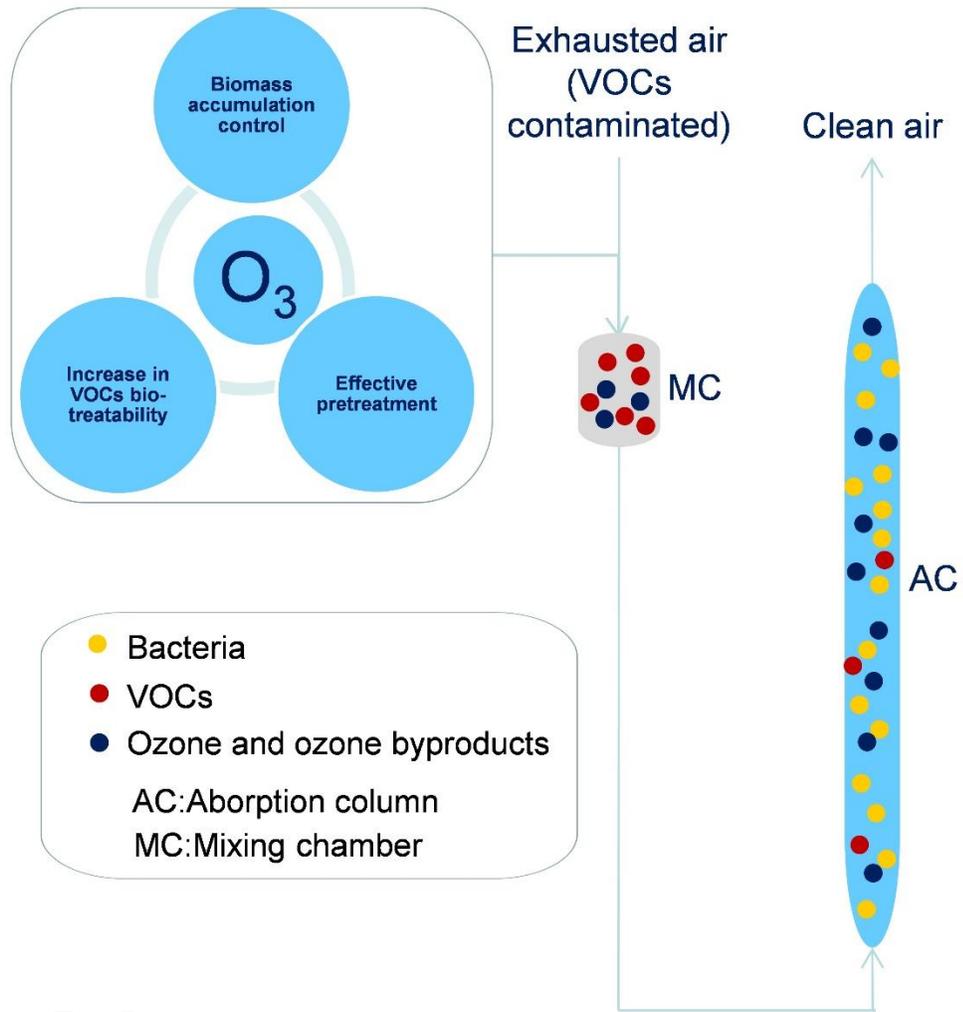

ACCEPT

ABSTRACT

Volatile Organic Compounds (VOCs) are toxic for the environment and human health and their tendency to readily volatilize in the atmosphere can lead to problems connected to odours annoyance. Conventional VOCs gaseous emissions treatments entail the application of chemical-physical processes, only promoting the transfer of the contaminants from gas to liquid and/or solid phases. Advanced Oxidation Process (AOPs) and biological processes, conversely, support the oxidation of the organic pollutants, promoting their conversion into harmless and odourless compounds. The integration of both processes is suggested to increase treatability of VOC.

The research presents the application of an innovative treatment system composed by an AOPs pretreatment coupled with a bio-scrubbing unit for the abatement of VOCs, with the aim to increase the removal efficiency. The evaluation of the performance of the proposed system is discussed with reference to the analysis carried out using toluene as model substance. Different operating conditions have been analyzed and investigated to optimize the removal efficiency. The results show that the ozonation applied as pretreatment to the biological process may promote an increase of the pollutant biodegradability along with synergic effects due to the absorption of the ozone derived compounds into the culture growth, resulting in a significant enhancement of removal performances respect to the conventional biotechnologies. A toluene removal efficiency up to 95% were obtained under the investigated conditions.

1. Introduction

The increasing concerns about odours emissions from wastewater treatment plants, composting plants and landfill has driven to the needs of a sustainable process for their control (Ren et al. 2019; Zarra et al. 2012; Zarra et al. 2016; Naddeo et al. 2012; Belgiorno et al. 2012) The raw gas emitted from the previously mentioned sources are mainly composed by GHGs, H₂S, NH₃ and Volatile Organic Compounds (VOCs) among the others (Zarra et al. 2014; Zarra et al. 2019) Toluene is a man-made aromatic hydrocarbon that is mainly used as solvent and industrial feedstock. Toluene is a VOC that has a narcotic and neurotoxic properties, which represent the main health hazards to humans (Berenjian et al. 2012). World Health Organization has reported that long-term exposure to VOCs can causes leukemia (Hazrati et al. 2016). Wherein, the 40% of toluene emissions came from the losses of refineries, 32% from automobile exhausts, 16% from solvents, 8% from petroleum loses to the sea, 2% from the loses from chemical industries and 8% from gasoline evaporation (IARC; Leusch and Bartkow 2010).

Physical, chemicals and biological technologies has been applied for the removal of VOCs and are widely studied (Muñoz et al. 2015). Thought, when physical and chemicals technologies are applied for the treatment of high flow rates and concentrations less than 100 ppm, the treatment process needs a huge amount of chemicals and more energy, resulting in a not economically viable process (Oliva et al. 2019).

Ozone (O₃) is a very strong oxidant that extensively attracted interest for the degradation of organic pollutants. It has been used for the treatment of water (Rosal et al. 2008) and it is also used for the degradation of gaseous toluene (Oliva et al. 2018). The degradation of organic substances using only O₃ is not possible (Rao and Chu 2009) and therefore the ozone is used in the advanced oxidation process (AOPs) in combination with other oxidation techniques (Chang et al. 2012; Kim, Yamashita, and Tanaka 2009; Pengyi et al. 2003; Rosal et al. 2008). Pengyi et al. showed that in photocatalytic process the ozone addition greatly enhanced the decomposition of gaseous toluene (Pengyi et al. 2003).

The recent study conducted by Comia et al. involving ultrasonication with ozone addition showed low removal efficiency of toluene (Comia et al. 2020).

On the other hand, biofiltration has been widely used as an efficient raw gas treatment technology thanks to the production of harmless by-products, less maintenance costs and operation under low temperature (25 °C) (Delhoménie et al. 2002; Mudliar et al. 2010). The VOCs can be a source of energy and carbon for microorganisms, which subsequently transformed it into CO₂, water, and biomass (Anbalagan et al. 2017; Oliva et al. 2018). However, toluene is insoluble in water, hence the microbial removal of hydrophobic pollutant might be difficult (Miller et al. 2019). The hydrophobicity of the pollutant in water affects its transport in the system which limits the microbial degradation (Haws et al. 2006; Gospodarek et al. 2019).

The research presents the application of an innovative treatment system composed by an integration of an adsorption and ozonation process, with the aim to treat raw gas contaminated with toluene. A vertical absorption column reactor inoculated with bacteria coming from activated sludge has been used and an ozone generator has been applied to promote a pretreatment. The synergistic approach of bioscrubber and ozonation on the elimination capacity, and removal efficiency, with respect to toluene load was analyzed. The total suspended solid (TSS) was used as a factor to evaluate the biomass production control obtained by the ozonation pretreatment

2. Material and methods

2.1 Experimental Set-up

The experimental setup showed in Figure 1 consisted of a vertical absorption column (VAC), a liquid mixing chamber, gas mixing chamber and O₃ generator. The VAC was made of a PVC cylinder with 130 cm height and 6 cm diameter, and filled with 3.3 L of inoculum with activated sludge sampled from a municipal wastewater treatment plant. The O₃ generator was made of a metallic cylinder equipped with UV lamp. The O₃ enriched air was generated from the oxygen coming from the pressurized ambient air using an air compressor. Liquid toluene was directly injected to the system

using a syringe pump (NO300, New Era Pump System) and mixed with O₃ in a gas mixing chamber. The gas produced after ozonation was diffused into the bioscrubber utilizing a metallic diffuser (Knaur Mobile Phase Filter, SS, 2 μm, 1/8" pipe OD). Four gas sampling ports (GSPs) were located in different point of the set-up as shows in Figure 1 for monitor the toluene and ozone concentrations in the system. Two GSPs were located before the gas mixing chamber to measure the toluene inlet concentration, and after the ozone generator to measure the ozone produced. The others two GSPs were placed before and after the bioscrubber to measure the toluene concentration before and after the absorption process. The volume of the liquid mixing chamber was around 18 L. A manometers were also implemented to measure the pressure in the system.

2.2 Inoculation of microorganisms

The inoculation of microorganisms was prepared with 0.50 L of activated sludge, centrifuged for 10 mins at 600 rpm, suspended to 0.25 L mineral salt medium (MSM). The initial pH value and TSS were set to 7.0 and 7 g L⁻¹, respectively (Oliva et al. 2018).

2.3 Chemicals

The MSM was composed of: Na₂HPO₄ (2.44 g L⁻¹); KH₂PO₄ (1.52 g L⁻¹); NH₄SO₄ (1.00 g L⁻¹); MgSO₄·7H₂O (0.20 g L⁻¹) and CaCl₂·2H₂O (0.08 g L⁻¹); 10 mL L⁻¹ of SL-4; and 100 mL of SL-6. The stock solution SL-4 contained EDTA (0.50 g L⁻¹), and FeSO₄·7H₂O (0.20 g L⁻¹). The SL-6 stock solution composed of: ZnSO₄·7H₂O (0.10 g L⁻¹); MnCl₂·4H₂O (0.03 g L⁻¹); H₃BO₃ (0.30 g L⁻¹); CoCl₂ (0.20 g L⁻¹); CuCl₂·2H₂O (0.01 g L⁻¹); NiCl₂·6H₂O (0.02 g L⁻¹); Na₂MoO₄· 2H₂O (0.03 g L⁻¹). The 99.9% of toluene used in this study obtained from Sigma-Aldrich Corporation (Darmstadt, Germany) was employed in this work. Potassium iodide (KI), sulfuric acid (H₂SO₄) and sodium thiosulfate (Na₂S₂O₃) have been used for the estimation of the ozone dose.

2.4 Operating conditions

The experiments were conducted at a temperature between 25 and 30 °C and the gas flow rate was adjusted at 1.6 L min⁻¹, corresponding to an empty bed retention time (EBRT) of 2 min.

Four different operating conditions have been investigated (Table 1). The bio-scrubber was operated continuously for 92 days. The first 30 days were run for the stabilization of the system. In the next 62 days, the inlet toluene concentrations were gradually increased from 150 to 300 mg m⁻³ and the toluene inlet load were varied from 4.5 to 9 g m⁻³ h⁻¹. Subsequently, the ozone loading rate was increased from 50 to 100 g m⁻³ h⁻¹.

Operating Parameters	Stage (days)			
	I	II	III	IV
	(30-44)	(45-60)	(61-78)	(79-92)
EBRT (min)	2			
Q _{liq} (L min ⁻¹)	0.8			
Q _{gas} (L min ⁻¹)	1.6			
L/G	0.5			
IL _{tol} (g m ⁻³ h ⁻¹)	4.5	4.5	9	9
C _{toluene,in} (mg m ⁻³)	150	150	300	300
LR _{O3} (g m ⁻³ h ⁻¹)	~50	-	-	~100

Table 1. Operating parameters

2.5 Toluene removal performance parameters

The evaluation of the performances of the combined process has been made by calculating the removal efficiency (RE%) and the elimination capacity (EC) (Muñoz et al. 2015).

Removal efficiency (RE, %):

$$RE (\%) = \frac{C_{in} - C_{out}}{C_{in}} \cdot 100$$

Elimination capacity (EC, mg m⁻³h⁻¹):

$$EC = \frac{Q(C_{in} - C_{out})}{V}$$

Where C_{in} is the inlet concentration of toluene (mg m⁻³), C_{out} is the outlet concentration of toluene (mg m⁻³), Q is the gas flow rate (m³ h⁻¹) and V is the volume of the bio-scrubber (m³).

3 Results and Discussion

Figure 2 reports the results in terms of elimination capacity (EC) and removal efficiency (RE) as function of the inlet load of toluene (IL) during the whole operation period.

When the ozone was applied as a pretreatment with an ozone loading rate respectively of 50 and 100 g m⁻³ h⁻¹, in the first and fourth stage, the removal efficiency of toluene changed from the 88 % to 92 %. Moreover, during the two stages with the ozonation, as reported in Table 2, a lower biomass was detected. A 50 % reduction in biomass was obtained compared to the process without ozone.

During steady-state operation, for IL up to 10.6 ± 1.9 g m⁻³ h⁻¹ a 78 ± 2 % removal of toluene was achieved without ozonation. At the ozone loading rate of 920 g m⁻³ h⁻¹ was obtained a removal efficiency of 95 %, corresponding to an EC of 13.81 ± 2.0 g m⁻³ h⁻¹.

Stages	TSS [mg L ⁻¹]	LR _{O₃} [g m ⁻³ h ⁻¹]
I	91	50
II	126	-
III	114	-
IV	60	100

Table 2. Total Suspended Solid under the four different conditions investigated.

4 Conclusion

A bio-scrubber coupled with ozonation was investigated under different toluene loading rates. The research shows the compatibility of ozonation process and its efficacy as a pretreatment system in order to enhance the absorption and the biodegradability rate of toluene.

Results highlighted a good synergism between the two processes, emphasizing that ozone pretreatment may promote not only the increase in pollutants biodegradability, preventing inhibiting conditions for the activity of microorganisms even at high concentration of toluene, but also the accumulation of excess biomass. Intact, a removal efficiency of 95 %, corresponding to an EC of 13.81 ± 2.0 g m⁻³ h⁻¹ was achieved and a 50% of biomass reduction was reach in the fourth stage.

Further studies are required in order to evaluate the availability of the investigated system for the treatment of a mixture of different organic and inorganic compounds.

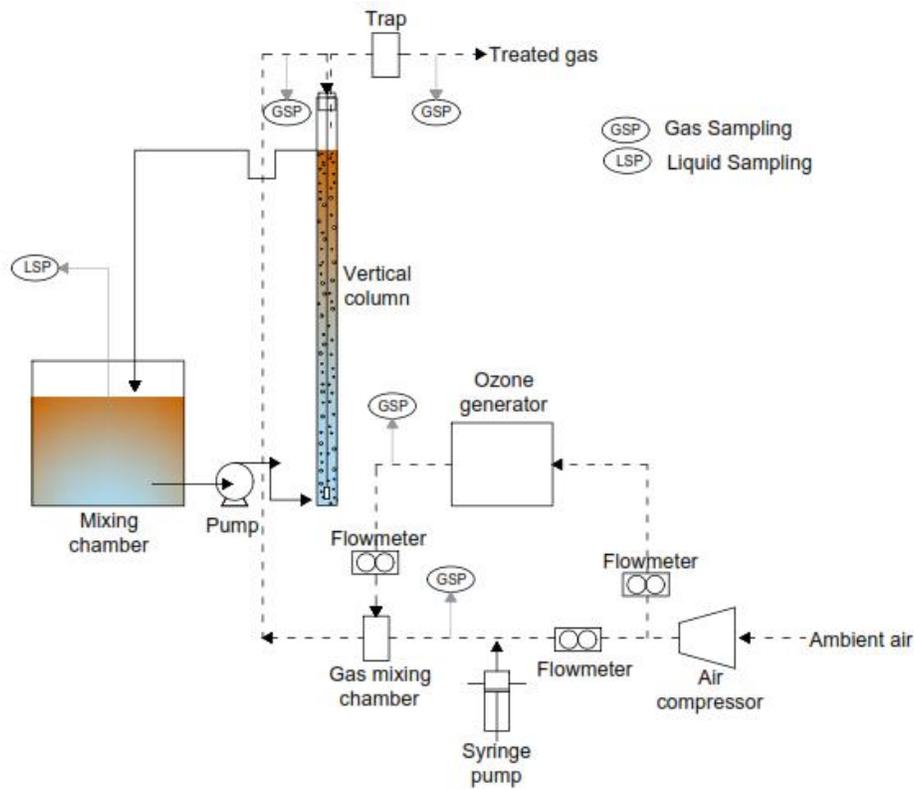


Figure 1. Experimental set-up

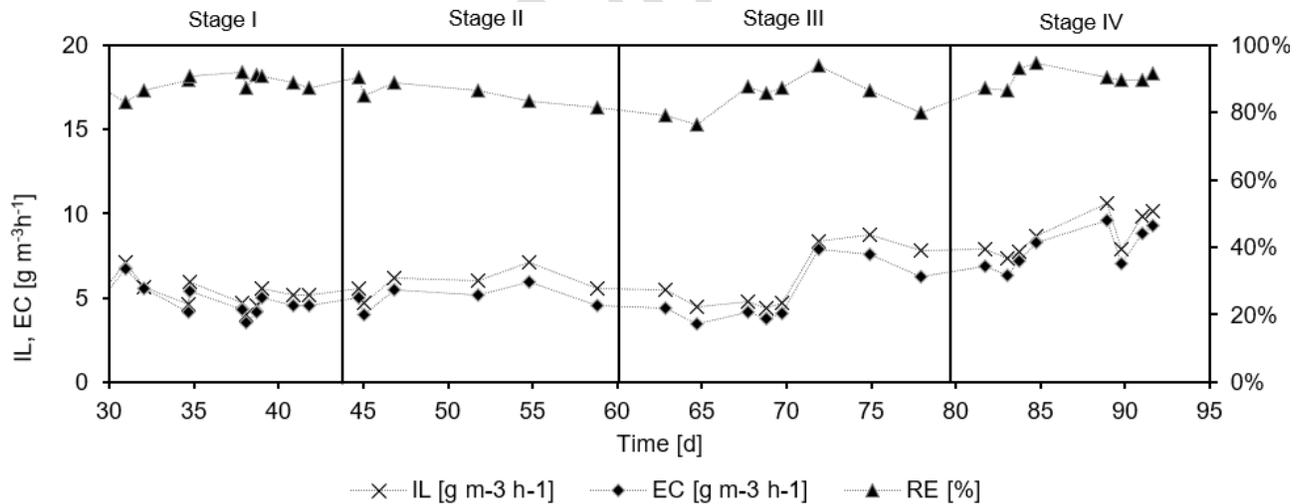


Figure 2. Toluene removal as a function of time

Acknowledgements

The authors are grateful to the Sanitary and Environmental Engineering Division (SEED) Laboratory of University of Salerno for providing the facilities.

Bibliography

- Anbalagan, Anbarasan et al. 2017. "Continuous Photosynthetic Abatement of CO₂ and Volatile Organic Compounds from Exhaust Gas Coupled to Wastewater Treatment: Evaluation of Tubular Algal-Bacterial Photobioreactor." *Journal of CO₂ Utilization* 21(July): 353–59.
<http://dx.doi.org/10.1016/j.jcou.2017.07.016>.
- Belgiorno, Vincenzo, Vincenzo Naddeo, and Tiziano Zarra, eds. 2012. *Odour Impact Assessment Handbook*. Hoboken, NJ, USA: John Wiley & Sons, Inc.
- Berenjian, Aydin, Natalie Chan, and Hoda Jafarizadeh Malmiri. 2012. "Volatile Organic Compounds Removal Methods: A Review." *American Journal of Biochemistry and Biotechnology* 8(4): 220–29.
- Chang, E. E. et al. 2012. "Degradation of Mefenamic Acid from Aqueous Solutions by the Ozonation and O₃/UV Processes." *Separation and Purification Technology* 98: 123–29.
- Comia, Jose et al. 2020. "Degradation of Gaseous VOCs by Ultrasonication: Effect of Water Recirculation and Ozone Addition BT - Frontiers in Water-Energy-Nexus—Nature-Based Solutions, Advanced Technologies and Best Practices for Environmental Sustainability." In eds. Vincenzo Naddeo, Malini Balakrishnan, and Kwang-Ho Choo. Cham: Springer International Publishing, 333–36.
- Delhom nie, Marie Caroline et al. 2002. "Biofiltration of Air Contaminated with Toluene on a Compost-Based Bed." *Advances in Environmental Research* 6(3): 239–54.
- Gospodarek, Milena, Piotr Rybarczyk, Bartosz Szulczyński, and Jacek Gębicki. 2019. "Comparative Evaluation of Selected Biological Methods for the Removal of Hydrophilic and Hydrophobic Odorous VOCs from Air." *Processes* 7(4): 12–15.
- Haws, Nathan W., William P. Ball, and Edward J. Bouwer. 2006. "Modeling and Interpreting Bioavailability of Organic Contaminant Mixtures in Subsurface Environments." *Journal of Contaminant Hydrology* 82(3–4): 255–92.

- Hazrati, Sadegh, Roohollah Rostami, Mehdi Fazlzadeh, and Farhad Pourfarzi. 2016. "Benzene, Toluene, Ethylbenzene and Xylene Concentrations in Atmospheric Ambient Air of Gasoline and CNG Refueling Stations." *Air Quality, Atmosphere and Health* 9(4): 403–9.
<http://dx.doi.org/10.1007/s11869-015-0349-0>.
- IARC. 1990. "IARC Monographs on the Evaluation of Carcinogenic Risks to Humans." *IARC Monographs on the Evaluation of Carcinogenic Risks to Humans* 48(i): 1.
- Kim, Ilho, Naoyuki Yamashita, and Hiroaki Tanaka. 2009. "Photodegradation of Pharmaceuticals and Personal Care Products during UV and UV/H₂O₂ Treatments." *Chemosphere* 77(4): 518–25.
- Leusch, Frederic, and Michael Bartkow. 2010. "A Short Primer on Benzene, Toluene, Ethylbenzene and Xylenes (BTEX) in the Environment and in Hydraulic Fracturing Fluids. PDF File on Http://Www.Derm.Qld.Gov.Au/Environmental_management/Coal-Seam-Gas/Pdf/Btex-Report.Pdf, Accessed on the 18th of July 2011." *Smart Water Research Center*.
<https://www.ehp.qld.gov.au/management/coal-seam-gas/pdf/btex-report.pdf>.
- Miller, Urszula, Izabela Sówka, and Waldemar Adamiak. 2019. "The Effect of Betaine on the Removal of Toluene by Biofiltration." *SN Applied Sciences* 1(9): 1–8.
- Mudliar, Sandeep et al. 2010. "Bioreactors for Treatment of VOCs and Odours - A Review." *Journal of Environmental Management* 91(5): 1039–54.
- Muñoz, Raúl, Luc Malhautier, Jean Louis Fanlo, and Guillermo Quijano. 2015. "Biological Technologies for the Treatment of Atmospheric Pollutants." *International Journal of Environmental Analytical Chemistry* 95(10): 950–67.
- Naddeo, Vincenzo, Tiziano Zarra, Stefano Giuliani, and Vincenzo Belgiorno. 2012. "Odour Impact Assessment in Industrial Areas." *Chemical Engineering Transactions* 30(i): 85–90.
- Oliva, Giuseppina et al. 2018. "Comparative Analysis of AOPs and Biological Processes for the Control of VOCs Industrial Emissions." *Chemical Engineering Transactions* 68: 451–56.
- . 2019. "Comparative Evaluation of a Biotrickling Filter and a Tubular Photobioreactor for the

- Continuous Abatement of Toluene.” *Journal of Hazardous Materials* 380(July): 120860.
- Pengyi, Zhang et al. 2003. “A Comparative Study on Decomposition of Gaseous Toluene by O₃/UV, TiO₂/UV and O₃/TiO₂/UV.” *Journal of Photochemistry and Photobiology A: Chemistry* 156(1–3): 189–94.
- Rao, Y. F., and W. Chu. 2009. “A New Approach to Quantify the Degradation Kinetics of Linuron with UV, Ozonation and UV/O₃ Processes.” *Chemosphere* 74(11): 1444–49.
- Ren, Baiming, Yaqian Zhao, Nathalie Lyczko, and Ange Nzihou. 2019. “Current Status and Outlook of Odor Removal Technologies in Wastewater Treatment Plant.” *Waste and Biomass Valorization* 10(6): 1443–58.
- Rosal, R. et al. 2008. “Removal of Pharmaceuticals and Kinetics of Mineralization by O₃/H₂O₂ in a Biotreated Municipal Wastewater.” *Water Research* 42(14): 3719–28.
- Zarra, T et al. 2014. 40 *Odour Emissions Characterization from Wastewater Treatment Plants by Different Measurement Methods*. ed. Del Rosso R. Italian Association of Chemical Engineering - AIDIC.
- Zarra, T, S Giuliani, V Naddeo, and V Belgiorno. 2012. “Control of Odour Emission in Wastewater Treatment Plants by Direct and Undirected Measurement of Odour Emission Capacity.” *Water Sci Technol* 66(8): 1627–33.
- Zarra, T, V Naddeo, and V Belgiorno. 2016. “Characterization of Odours Emitted by Liquid Waste Treatment Plants (LWTPs).” *Global Nest Journal* 18(4): 721–27.
- Zarra, Tiziano et al. 2019. “Environmental Odour Management by Artificial Neural Network – A Review.” *Environment International* 133(May): 105189.
<https://doi.org/10.1016/j.envint.2019.105189>.