

# Evaluate the effectiveness of the UV/persulfate process to remove catechol from solution aqueous

Kamarehie B.<sup>1</sup>, Jafari A.<sup>1</sup>, Shams Khoramabadi G.<sup>1</sup>, Mansouri Bidkani M.<sup>2</sup>, Ghadepoori M.<sup>1,3\*</sup>, Karami M.A.<sup>1</sup> and Ghaderpoory A.<sup>4</sup>

<sup>1</sup>Department of Environmental Health Engineering, School of Health and Nutrition, Lorestan University of Medical Sciences, Khorramabad, Iran

<sup>2</sup>Student Research Committee, Lorestan University of Medical Sciences, Khorramabad, Iran

<sup>3</sup>Nutrition Health Research Center, Lorestan University of Medical Sciences, Khorramabad, Iran


<sup>4</sup>Student Research Committee, Department of Environmental Health Engineering, Shahid Beheshti University of Medical Sciences, Tehran, Iran

Received: 03/04/2020, Accepted: 02/01/2021, Available online: 22/02/2021

\*to whom all correspondence should be addressed: e-mail: mghaderpoori@gmail.com

<https://doi.org/10.30955/gnj.003322>

## Graphical abstract

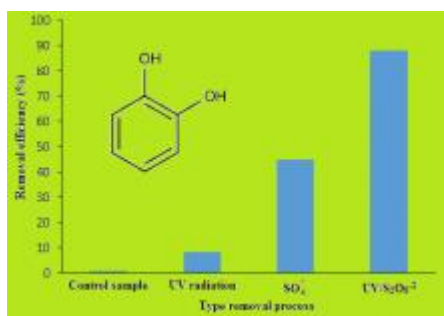

## Abstract

Catechol is used as an antioxidant, fungicide, and polymerization inhibitors in a variety of industries such as petrochemical. Catechol must be removed from effluents before it enters to environment. This study aimed to investigate combined UV radiation and persulfate process in removal of catechol from aqueous solutions. All experiments were performed in a batch reactor. Data analysis were done with Design of Experiment (DoE) software. The effects of various variables such as pH, initial persulfate concentration, and initial Catechol concentration were investigated. The findings indicated with increases in persulfate concentration and decrease in catechol concentrations, the removal efficiency increased. Acidic pH and UV radiation were the leading factors in removal of catechol. The optimum pH, persulfate concentration, and catechol concentration were obtained 7, 0.04 M, and 100 mg l<sup>-1</sup>, respectively. More removes of catechol was achieved in optimum conditions within contact time of 60 min. The synergic effects of UV and persulfate radical were about 88%. Approximately 60% of catechol was mineralized within contact time of 60 min. Persulfate radicals resulting from UV/S<sub>2</sub>O<sub>8</sub><sup>2-</sup> were the main effective oxidants in removal and mineralization of catechol. Owing to high removal efficiency of persulfate



compounds which are, also, abundant and inexpensive, these can be applied in removal of persistent organic pollutants from aqueous solutions.

**Keywords:** Persulfate radical, catechol, UV radiation, advanced oxidation.

## 1. Introduction

Catechol, one of the derivation of phenol, is colorless and has a phenol-like smell (Moussavi *et al.*, 2014). Catechol has a phenolic ring which bonds to two Hydroxyl (OH<sup>o</sup>) functional groups (Bayram *et al.*, 2009; Liu *et al.*, 2014). Catechol can enter into our environment from various sources such as photographic developer, paper and pulp, textile, pharmacy, insecticides, paint, engine lubricants, oil refinery, petrochemical lubricating oils, polymerization inhibitors and pharmaceutical (Lofrano *et al.*, 2009). It is applied as an antioxidant, fungicide, and polymerization inhibitors in various industries. The catechol concentration in the effluents of different industries is range less than one to 1000 mg l<sup>-1</sup> (Bayram *et al.*, 2009; Liu *et al.*, 2014). The catechol concentration is typically low in environment, but the effluents of industrials processes may contain catechol concentrations ranging from one to 1000 mg/l. It is synthetically produced by hydroxylation of phenol using Hydrogen peroxide (H<sub>2</sub>O<sub>2</sub>) or created by Hydrolysis of 2-chlorophenol with alkali metals hydroxides (Moussavi *et al.*, 2014; Shakir *et al.*, 2008). Catechol similar to other phenol derivations has toxicity and can cause environmental and health concerns such as irritation of eye, skin, pulmonary, liver dysfunction, DNA destruction, and neurological diseases. Catechol easily adsorbed to digestive tract, and it can result in hemolysis and acute tubular necrosis (Gunawardana *et al.*, 2011; Hamad *et al.*, 2011; Zhao *et al.*, 2010). Catechol is more toxic and hazardous to human, environment, and microorganisms compared to phenol (Sun *et al.*, 2010). To date, a variety of physicochemical methods have been investigated for the removal of catechol compounds from the aqueous

solutions, including biological process, air oxidation, wet oxidation by H<sub>2</sub>O<sub>2</sub>, and adsorption (Haidari *et al.*, 2016; Kamali and Ghaziaskar, 2010). The important drawbacks of these technologies include failure to complete degradation of contaminants, contaminant transmission from a phase to another, and production by-products as well (Azarpira *et al.*, 2019; Hasanpour and Hatami, 2020a; Sun *et al.*, 2010; Zhao *et al.*, 2010). In recent decades, advanced oxidation processes (AOPs) such as Fenton, H<sub>2</sub>O<sub>2</sub>/O<sub>3</sub>, H<sub>2</sub>O<sub>2</sub>/UV, and O<sub>3</sub>/UV have been widely using as high-efficiency processes for removal of resistant (persistent) pollutants from soil, water, and wastewater (Ghaderpoori and Dehghani, 2016; Haidari *et al.*, 2016; Hasanpour and Hatami, 2020b; Kamali and Ghaziaskar, 2010; Shukla *et al.*, 2010c). The major purposes of these techniques are producing high-oxidation radical, including OH<sup>•</sup>, O<sup>•</sup>, and the sulfate radical, which rapidly oxidize and remove resistant substances to biodegradation (Antoniou *et al.*, 2010). For these reasons, a great number of studies have been done to remove phenol derivations with different radicals (Kamali and Ghaziaskar, 2010; Kamarehie *et al.*, 2018; Kamarehie *et al.*, 2020; Rokhina *et al.*, 2010; Sun *et al.*, 2010). These radicals provide situations to react with persistent substances and increase pollutants degradation (Boukari *et al.*, 2011). Persulfate has an oxidizing potential equal to 2.01 V (Gayathri *et al.*, 2010). An effective mechanism of persulfate is generating the sulfate radical and OH<sup>•</sup> radicals and using them for degradation of organic matters. However, more studies have concluded that degradation rate of organic matter, in room temperature, is very low by persulfate radicals. Therefore, accelerating process for activation (increases in concentration of radicals) is needed (Shukla *et al.*, 2010a). Persulfate can be activated by various method such as increasing temperature, adding intermediate metals (Me<sup>2+</sup>) and UV radiation (Astereki *et al.*, 2016; Liang *et al.*, 2006). Physical and chemical activations of persulfate are shown as follows (Karimi *et al.*, 2013; Shukla *et al.*, 2010b):



The studies have shown that UV/S<sub>2</sub>O<sub>8</sub><sup>2-</sup> is an effective process to remove persistent organic pollutants (Lin *et al.*, 2011; Salari *et al.*, 2008). A number of researchers have applied this method to remove POPs and obtained similar results. Delavaran Shiraz *et al.* study showed that persulfate activated by UV and ferrous ions was an effective process in removing catechol (Fang and Shang, 2012; Lin *et al.*, 2011; Lin *et al.*, 2013). Yoon *et al.* study showed that UV/S<sub>2</sub>O<sub>8</sub><sup>2-</sup> was very effective in removing bisphenol compared to UV-H<sub>2</sub>O<sub>2</sub> was an effective process in removing catechol (Yoon *et al.*, 2012). The advantages of the process include low cost, high stability and solubility, storage and easy transfer (Fang and Shang, 2012; Gao *et al.*, 2012). The response surface methodology is good procedure to study the relationship between independent and dependent variables (Massoudinejad *et al.*, 2018;

Yazdanbakhsh *et al.*, 2018). In response surface methodology category, central composite design that is appropriate for fitting second order polynomial equations has been frequently discussed for optimizing several research problems. To design experiments, Design of Experiments Software (DOE) and Central Composite Design (CCD) was applied. In the study, five coded levels (+α, +1, 0, -1, and -α) factorial experimental design was used to optimize the reaction conditions. The aim of present study was to evaluate the effectiveness of the UV/S<sub>2</sub>O<sub>8</sub><sup>2-</sup> process to remove Catechol from solution aqueous.

## 2. Methods

### 2.1. Chemicals and instruments

Catechol (C<sub>6</sub>H<sub>6</sub>O, white to brown feathery crystal, phenolic odor), NaOH, H<sub>2</sub>SO<sub>4</sub>, were purchased from Merck Company, Germany. Digital pH meter model BP300 and spectrometer UV/VIS (DR-5000) were used to measure pH and contaminant concentrations, respectively. Samples pH were adjusted by adding a few drops of NaOH and H<sub>2</sub>SO<sub>4</sub> (1N).

#### 2.1.1. Design of Experiments (DoE)

To determine removal efficiency of catechol by UV/S<sub>2</sub>O<sub>8</sub><sup>2-</sup>, initial catechol concentrations (100-500 mg l<sup>-1</sup>), pH (3-11), and persulfate radicals (0.01-0.05 M) were considered as dependent variables. Removal efficiency of catechol was dependent variables. The constant UV radiation throughout study was 30W. The number of experiment were determined 20 run (central point=20 run and not center point=14 run. Optimum time for experiment was determined 60 min after pre-test. The samples were exposed to UV for 60 min, and then the samples were detected. After experiments, the coefficient of the polynomial model were calculated to equation 1 (Eq. 1) (Massoudinejad *et al.*, 2016)

$$Y(\%) = a_0 + \sum_{i=1}^n a_i X_i^2 + \sum_{i=1}^{n-1} \sum_{j=2}^n a_{ij} X_i X_j + e \quad (1)$$

Where, *i* and *j* are linear and quadratic coefficients, respectively. *a*<sub>0</sub>, *a*<sub>*i*</sub>, *a*<sub>*ii*</sub>, and *a*<sub>*ij*</sub> are constant, linear, interaction, and quadratic coefficients, respectively. The removal efficiency of Catechol was calculated according to Eq. 2 (Massoudinejad *et al.*, 2016):

$$R, \% = \frac{(C_0 - C_t)}{C_0} \quad (2)$$


Where, *C*<sub>0</sub> and *C*<sub>*t*</sub> represent the initial and final concentration of catechol (mg L<sup>-1</sup>), respectively. To measure Chemical Oxygen Demand (COD), volumetric method (titration) was applied. All experiments were performed based on standard method for examination of water and wastewater (Eaton AD *et al.*, 2005). First, A 100 mg L<sup>-1</sup> of stock solution was prepared with catechol (purity 98%). Then, the calibration curve were drawn in different catechol concentrations (2, 10, 50, 100, 150, and 200 mg L<sup>-1</sup>). After that, residual concentration of catechol were determined by High-Performance Liquid Chromatography (HPLC) (UV detector, wavelength=275nm, the column =

100-5C18; 4.6mm × 250mm, 5 $\mu$ m, temperature = 23°C, Mobile phase = a mixture of methanol and water 44:55) (Yoon *et al.*, 2012). The experimental runs of CCD show at Table 1. In this work, a 1000 mL Plexiglas reactor was

applied to experiments. Five ultraviolet (UV) tubes 6W, low pressure (PHILIPS), also were used as UV radiation sources. The experiments were performed in a batch reactor, as shown in Figure 1.

**Table 1.** The runs for removal process of catechol by UV/S<sub>2</sub>O<sub>8</sub><sup>2-</sup>

Run	Catechol conc. (mg L <sup>-1</sup> )	pH	Persulfate (mg L <sup>-1</sup> )	Removal efficiency (%)	Predicted value (%)
1	300	7	0.03	94.97	94.55
2	300	3	0.03	92.88	94.55
3	420	5	0.02	68.28	69.64
4	180	9	0.04	100	99.88
5	500	7	0.03	75.44	71.82
6	300	7	0.01	71.22	73.05
7	300	7	0.03	90.54	94.55
8	180	5	0.4	100	99.98
9	180	5	0.02	100	97.68
10	180	9	0.02	95	97.68
11	300	7	0.03	69.86	94.55
12	420	9	0.02	94.5	69.64
13	300	7	0.03	94.19	94.55
14	420	5	0.04	87.19	90.72
15	420	9	0.04	89	90.72
16	300	7	0.03	95.2	94.55
17	300	7	0.05	98.6	96.32
18	100	7	0.03	99.85	102.82
19	300	7	0.03	95	94.55
20	300	11	0.03	99	94.55

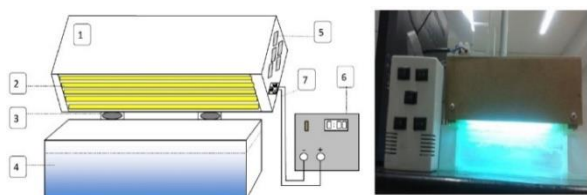

**Figure 1.** A view of the pilot used for UV/S<sub>2</sub>O<sub>8</sub><sup>2-</sup>  
[1-Wooden removable cap, 2-UV lamps, 3-Hinge, 4-Glass reactor with aluminum cover, 5-Switching keys, 6-Power source, 7-Current cables]

### 3. Results and discussion

#### 3.1. Statistical analysis and model fitting

The results of present study showed that the catechol removal by UV/S<sub>2</sub>O<sub>8</sub><sup>2-</sup> was fitted to polynomial models. Also, Analysis of variance (ANOVA) indicated that the selected model has a capability to estimate (predict) process (P-value <0.05). The model F-value of 61.13 implied the model was significant. There was only a 0.01% chance that a model F-value this large could occur due to noise. Values of prob>F less than 0.05 indicated model terms were significant. In this case C, BC, B<sup>2</sup>, C<sup>2</sup> were significant model terms. Values greater than 0.1 indicated the model terms were not significant. If there were many insignificant model terms (not counting those required to support hierarchy), model reduction may improve your model. The lack of fit (LoF) of F-value of 2.74 implied the lack of fit was not significant relative to the pure error. There was a 13.98% chance that a LoF of F-value this large could occur

due to noise. Non-significant LoF was good. The correlation coefficient, modified correlation, and predicted correlation were in order 0.99, 0.97, and 0.81, respectively. The predicted R-squared, R<sup>2</sup>, of 0.86 was in reasonable agreement with the adjustment R-squared of 0.94. Adequate precision measures the signal to noise (S/N) ratio. A ratio greater than four is desirable. In this study, S/N ratio of 23.015 indicated an adequate signal. This model can be used to navigate the design space. It show the selected model was of high accuracy. The removal efficiency of this study were found to have range 68% to 100%. The DoE software works based on multivariable linear regression model, the outputs are discussed as following Eq. 3:

$$R, \% = 89.81 + (4.82 * B) - (21.35 * C) + (11.13 * B * C) - (2.56 * B^2) - (13.95 * C^2) \quad (3)$$

Where, B and C are catechol concentration and the sulfate radical concentration, respectively. The optimum pH, persulfate concentration, and catechol concentration were obtained 7, 0.04 M, and 100 mg L<sup>-1</sup>, respectively. Finally, data validation was performed with the tests: I. normal probability plot of the studentized residuals to check for normality of residuals, II. studentized residuals versus predicted values to check for constant error, III. externally studentized residuals to look for outliers, i.e., influential values. And IV. Box-Cox plot for power transformations.

#### 3.2. Optimization and model validation

In DoE software, the optimization of variables is performed in three methods: numerical, graphical, and point

prediction. This study was to optimize with the use of numerical methods. To obtain the optimal condition for catechol removal and for maximum desirability. catechol concentration, persulfate concentration, initial pH, and contact time were set minimum, minimum, in the range and, in the range, respectively. The best local maximum was found to be at the pH 7, catechol concentration of 181.08 mg L<sup>-1</sup>, persulfate concentration of 0.04 M, contact time of 60 min. Removal efficiency of catechol in the optimal conditions obtained 90 percent, and desirability of one.


### 3.3. The effects of SO<sub>4</sub><sup>°</sup> concentration on the removal efficiency of UV-S<sub>2</sub>O<sub>8</sub><sup>2-</sup>

The study findings showed that an increase in the sulfate radical concentration can effect on removal efficiency of catechol. Increasing in concentration of oxidant leads to increases in the sulfate radical concentration, which result in promotion of reaction and catechol degradation. Types and concentrations of oxidants are important factors in AOPs. Persulfate (S<sub>2</sub>O<sub>8</sub><sup>2-</sup>), a two-electron oxidant, produces SO<sub>4</sub><sup>°</sup> with higher redox potential compared to O<sub>3</sub> and OH<sup>°</sup>. These radicals can break down organic pollutants (Karimi *et al.*, 2013). In degradation of organic matter, first, the sulfate radical is activated through physical and chemical reaction with UV radiation. Then, the intermediate products such as the sulfate radical are produced (Azbar *et al.*, 2004). The sulfate radicals can mineralize organic matters and produce CO<sub>2</sub>, H<sub>2</sub>O, and acidic organics. It not only can attack directly to organic matters and degrade them, but also is capable of indirectly reacting to H<sub>2</sub>O and OH<sup>°</sup>, which are two main factors in degradation of organic matters. The polynomial model showed that there as significant relationship between the sulfate radical and removal efficiency of catechol (P-value<0.02). Removal efficiency of catechol in different concentrations of SO<sub>4</sub><sup>°</sup> are illustrated in Figure 2. As can be seen, increases in the sulfate radical concentrations can significantly effect on removal efficiency, so that increases in the sulfate radical concentration from 0.04 to 0.08 M has removal efficiency approximately 18%. The increasing in the removal efficiency of catechol along with increase in concentration of OH<sup>°</sup> and the sulfate radicals is justifiable (Azbar *et al.*, 2004; Rasoulifard *et al.*, 2012). Yegane *et al.* achieved the highest removal efficiency in concentration 0.04 mM L<sup>-1</sup> of the sulfate radical (Esrafil *et al.*, 2016; Khataee, 2009; Olmez-Hanci and Arslan-Alaton, 2013; Wang and Liang, 2014). Persulfate concentrations can increase the sulfate radical to a specified range, which subsequently result in increases of degradation rate and removal efficiency. The results agreement to Shaing *et al.* called dye degradation using microwave process and persulfate (Astereki *et al.*, 2016).

### 3.4. The effects of initial catechol concentrations on the removal efficiency

In most studies related to organic matters oxidation, increasing in pollutant concentration have been along with reduction in removal efficiency (Massoudinejad *et al.*, 2020). The study results showed that initial concentrations can significantly effect on removal efficiency. Other similar

studies, removal efficiency decreased by increasing catechol concentrations. When the concentrations of persulfate radical and the sulfate radical were constant, but the catechol concentrations are increasing, removal efficiency decreased. Therefore, there were not sufficient available the sulfate radical for degradation. As well, high concentrations of catechol avoid radiation to permeate to depth of solution and decreased the persulfate radicals. As a result, the rate of catechol degradation decreased (Lee *et al.*, 2009; Olmez-Hanci and Arslan-Alaton, 2013; Shiyong *et al.*, 2009). The results obtained the polynomial model showed that there was significant correlation between initial catechol concentration and the removal efficiency (P-value <0.001). The results of the effects of initial catechol concentrations on removal efficiency are shown in Figure 3. By increasing the initial catechol concentration from 181.08 to 418.92, the removal rate decreased by approximately 45%. The results showed that adsorption is not appropriate for the removal of higher concentrations of 110 mg L<sup>-1</sup> (Lofrano *et al.*, 2009). The results of this study were consistent with other studies (Rasoulifard *et al.*, 2012; Zarrabi *et al.*, 2013).

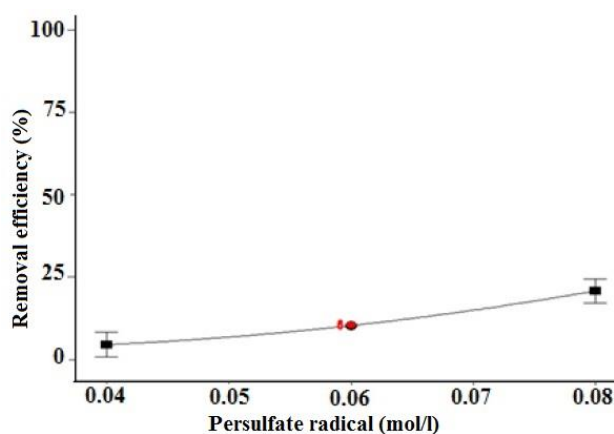


**Figure 2.** The effects of SO<sub>4</sub><sup>°</sup> on removal efficiency [pH= (3-11), UV radiation= 30 W, persulfate concentration (0.0- 2.1 M), Catechol concentrations (100- 500 mg L<sup>-1</sup>), and contact time: 60 min]


### 3.5. The effects of pH on the removal efficiency

pH is very effective factor in generation of the sulfate radical and OH<sup>°</sup> radicals However, most studies emphasize that pH has important effects on removal efficiency (Alinejad *et al.*, 2019; Kamarehie *et al.*, 2019; Olmez-Hanci and Arslan-Alaton, 2013; Moussavi *et al.*, 2014). For this reason, solution pH was considered as an important factor in the present study. The results showed pH can impact on the removal efficiency. The polynomial model indicated that the effect of initial pH of solutions was not significant (P-value <0.46). Figure 4 shows the effects of pH on the removal efficiency of catechol. The best pH to remove the catechol was neutral conditions. The removal efficiency of catechol was reduced by almost 20% at acidic and alkaline pH. In a neutral pH, the highest persulfate radicals may be produced, which the increase in radical concentration could have a positive impact on removal efficiency. The

study results of Yegane et.al on removal of diethyl phthalate with UV/S<sub>2</sub>O<sub>8</sub><sup>2-</sup> showed that the optimum pH for high removal efficiency was 11 (Esrafil *et al.*, 2016). Solution pH in alkaline range were more appropriate than acidic (Guo *et al.*, 2014; Lin *et al.*, 2011; Rasoulifard *et al.*, 2012).

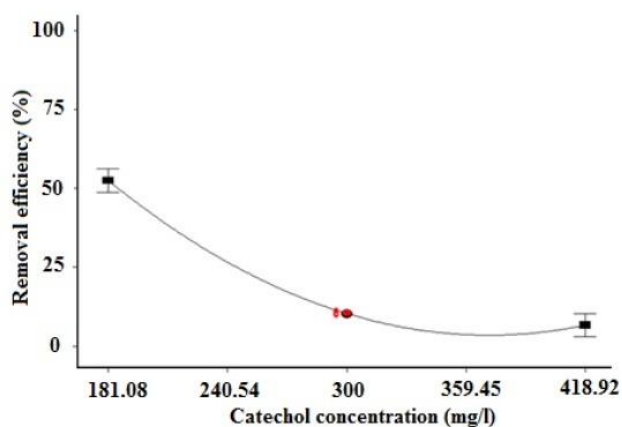

**Figure 3.** The effects of initial catechol concentrations on efficiency [pH= (3-11), UV radiation= 30 W, Persulfate concentrations (0.0-2.1 M), catechol concentrations (100- 500 mg L<sup>-1</sup>), and Time: 60 min]

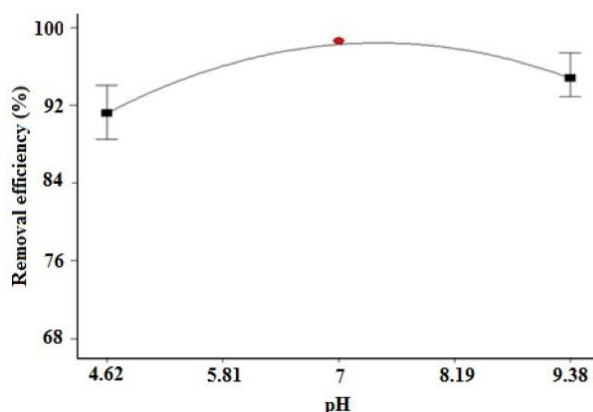

**Figure 4.** The effects of initial pH on removal efficiency of catechol pH= (3-11), UV radiation= 30 W, Persulfate concentrations (0.0-2.1 M), catechol concentrations (100- 500 mg L<sup>-1</sup>), and Time: 60 min]


### 3.6. The interaction effects of pH and SO<sub>4</sub><sup>•</sup> on the removal efficiency

As can be seen in Figure 5, the findings showed that there were significant relationship between the interaction effects of pH and the sulfate radical on the removal efficiency of catechol. The most removal efficiency of catechol was observed at neutral. At a constant pH with increasing concentrations of sulfate radicals, the removal efficiency of Catechol increased. persulfate radical is an oxidizing agent and by increasing the concentration the rate of decomposition increased (Esrafil *et al.*, 2016). The stability of persulfate in aqueous solutions are more than OH<sup>•</sup>(Shokouhi *et al.*, 2010). Another reaction which occurred in in alkaline pH is reaction between persulfate and OH<sup>•</sup> radicals (Eq. 4) (Xu *et al.*, 2012). This reaction

significantly decreases the removal efficiency, because of the lack of radicals under this conditions.



The results were agreement with the results of Piternal et.al (Chu *et al.*, 2015). Also, Seymohamaddi et.al obtained the similar results in removal of 2,4-dichlorophenol by ultrasound -activated persulfate in aqueous solutions (Shukla *et al.*, 2010c). Cho et.al concluded removal efficiency in acidic pH was much better than alkaline (Peternel *et al.*, 2010).

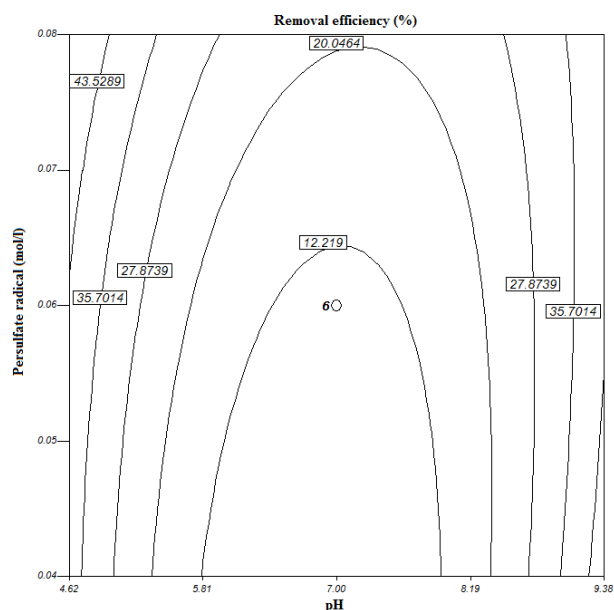


**Figure 5.** The simultaneous effects of pH and initial catechol concentrations on removal efficiency [pH= (3-11), UV radiation= 30 W, Persulfate concentrations (0.0-2.1 M), Catechol (100- 500 mg L<sup>-1</sup>), and Time: 60 min]

### 3.7. The interaction effects of SO<sub>4</sub><sup>•</sup> and catechol concentrations on removal efficiency


As can be seen in Figure 6, the results showed that there was a significant relationship between the sulfate radical and catechol concentrations on removal efficiency of catechol ( $P_{\text{value}} < 0.05$ ). At constant concentration of persulfate radical, catechol removal efficiency decreases with increasing of catechol concentration.

### 3.8. The effect of contact time on removal efficiency

Kinetic studies are used to predict the rate of degradation and its mechanisms (Golmohammadi *et al.*, 2016). Figure 7 shows the results of kinetic studies of catechol degradation with UV/S<sub>2</sub>O<sub>8</sub><sup>2-</sup> processes in optimum conditions. The results showed that the rate of pollutant removal was fitted to pseudo- the pseudo-first order model ( $R^2 = 0.98\%$ ).

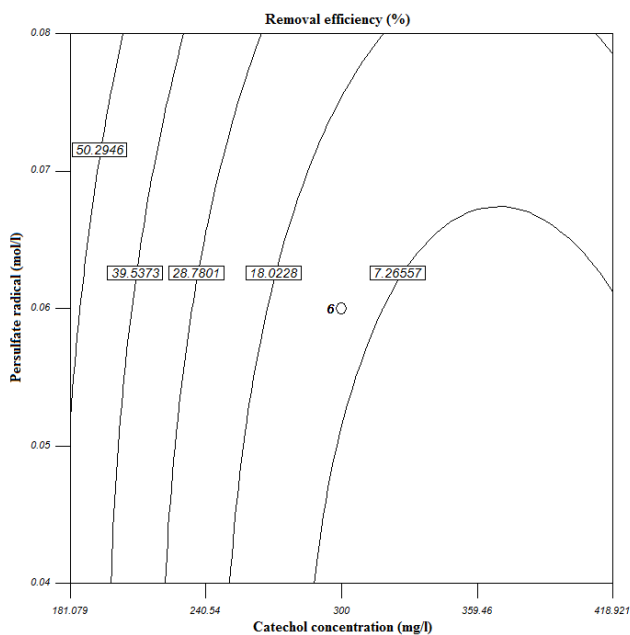

**Figure 6.** The simultaneous effects of  $\text{SO}_4^{\bullet-}$  and catechol concentrations on removal efficiency [pH= (3-11), UV radiation= 30 W, persulfate concentration (0.0-2.1) M, catechol concentrations (100- 500  $\text{mg L}^{-1}$ ), and contact time= 60 min].

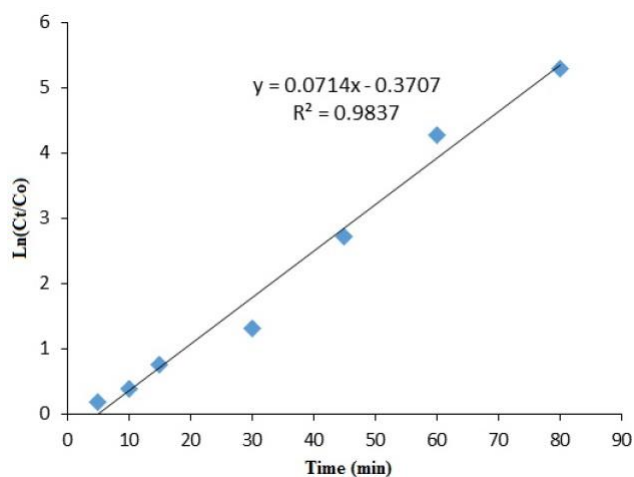


**Figure 7.** The effects of contact time on removal efficiency in optimum conditions [pH= 7, UV radiation= 30 W, persulfate concentrations (0.04 M), catechol concentration (100  $\text{mg L}^{-1}$ ).


### 3.9. The simultaneous effects of variables

The removal efficiency obtained in optimum conditions by each variable are illustrated in Figure 8. The results showed removal efficiency of UV radiation and the sulfate radical alone were 8.5% and 45%, respectively. The results indicated that UV radiation was caused low degradation of catechol. Ghaderpoori *et al.* study (2016) showed that UV radiation alone was not useful to degrade the linear alkylbenzene sulfonate (LAS) (Ghaderpoori and Dehghani, 2016). Like UV radiation, the sulfate radical had little effect on catechol degradation (actually a little more of UV radiation alone). However, combination of UV radiation and the sulfate radical had removal efficiency of catechol about 88%. In this stage, the sulfate radical produced, which was an effective factor in promotion of removal

efficiency. In fact, the synergic effects were result from the presence of UV radiation (Safari *et al.*, 2015). It enhances  $\text{UV/S}_2\text{O}_8^{2-}$  and produces the sulfate radical which can be effective in degradation of organic matters. The previous studies in agreement to this study that the UV radiation was an activation important factor for persulfate radicals and the sulfate radical (Astereki *et al.*, 2016; Liu and Li, 2006; Sun *et al.*, 2011; Wang and Liang, 2014).

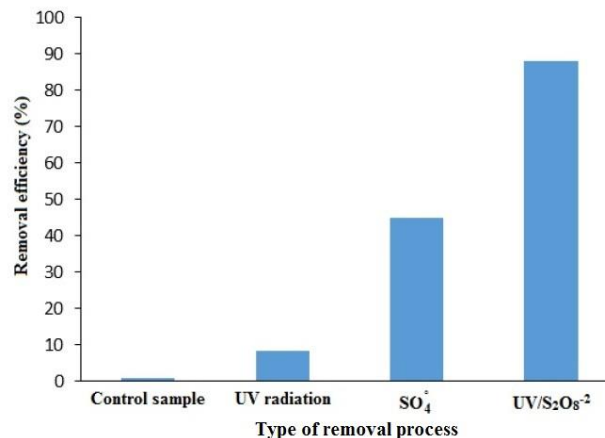

**Figure 8.** Removal efficiency of various processes in optimum conditions [pH= 7, UV radiation= 30 W, persulfate concentrations (0.04 M), catechol concentration (100  $\text{mg L}^{-1}$ ), and contact time= 60 min].

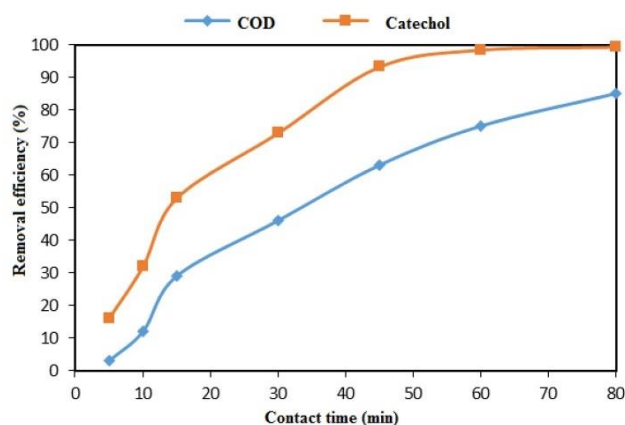

**Figure 9.** The removals efficiency of COD and catechol in optimum conditions [pH= 7, UV radiation= 30 W, persulfate concentrations (0.04 M), catechol concentration (100  $\text{mg L}^{-1}$ ).

### 3.10. Mineralization of Catechol

COD is an important indicator for complete degradation of organic matters. Figure 9 shows the removal efficiency of COD and catechol in optimum conditions. As can be seen in Figure 9, the removal efficiency trends of COD and catechol are the same. On the other hand, after 80 min the removals efficiency of catechol and COD were 99.6 and 85%, respectively, which are agreement to Mousavi *et al.* (2014) obtained removals efficiency 98 and 74.4% for catechol and COD, respectively (Moussavi *et al.*, 2014). The results showed  $\text{UV/S}_2\text{O}_8^{2-}$  completely degraded catechol instead of slight degradation of target pollutant. The differences between two charts in Figure 9 demonstrate the production of by-products, which are created by

degradation of catechol. Lin et.al concluded which this process can completely (100%) remove phenol from aqueous solutions within 20 min (Fang and Shang, 2012). In another study conducted by Fang et.al, this process could remove 2-bromoacetamide completely from aquatic environments (He *et al.*, 2013). Finally, the use of these processes before biological systems can decrease COD less than discharge standards for wastewater into environment.

#### 4. Conclusion

In this study, we investigated the optimization of fluoride removal with UV/S<sub>2</sub>O<sub>8</sub><sup>2-</sup>. To design experiments, Design of Experiments Software and CCD was applied. In order to determine removal efficiency of catechol, initial catechol concentrations, pH, and persulfate radicals were considered. The results showed that the catechol removal by UV/S<sub>2</sub>O<sub>8</sub><sup>2-</sup> was fitted to polynomial models. Removal efficiency of catechol in the optimal conditions obtained 90%. The best pH to remove the catechol was neutral conditions. The removal efficiency of catechol was reduced by almost 20% at acidic and alkaline pH.

#### Acknowledgement

The study authors are grateful for financial support from Khorramabad University of Medical Sciences

#### References

- Alinejad A., Akbari H., Ghaderpoori M., Jeihooni A.K. and Adibzadeh A. (2019), Catalytic ozonation process using a MgO nano-catalyst to degrade methotrexate from aqueous solutions and cytotoxicity studies in human lung epithelial cells (A549) after treatment, *RSC Advances*, **9**, 8204–8214.
- Antoniou M.G., Armah A. and Dionysiou D.D. (2010), Degradation of microcystin-LR using sulfate radicals generated through photolysis, thermolysis and e<sup>-</sup> transfer mechanisms, *Applied Catalysis B: Environmental*, **96**, 290–298.
- Astareki S., Kamarehie B. and Jafari A. (2016), 2-chlorophenol removal of aqueous solution using advanced oxidation processes resulting from iron/persulfate and ultra violet/persulfate, *Iranian Journal of Toxicology*, **10**, 1–8.
- Azarpira H., Sadani M., Abtahi M., Vaezi N., Rezaei S., Atafar Z., Mohseni S.M., Sarkhosh M., Ghaderpoori M. and Keramati H. (2019), Photo-catalytic degradation of triclosan with UV/iodide/ZnO process: Performance, kinetic, degradation pathway, energy consumption and toxicology, *Journal of Photochemistry and Photobiology A: Chemistry*, **371**, 423–432.
- Azbar N., Yonar T. and Kestioglu K. (2004), Comparison of various advanced oxidation processes and chemical treatment methods for COD and color removal from a polyester and acetate fiber dyeing effluent, *Chemosphere*, **55**, 35–43.
- Bayram E., Hoda N. and Ayranci E. (2009), Adsorption/electrosorption of catechol and resorcinol onto high area activated carbon cloth, *Journal of Hazardous Materials*, **168**, 1459–1466.
- Boukari S.O., Pellizzari F. and Leitner N.K.V. (2011), Influence of persulfate ions on the removal of phenol in aqueous solution using electron beam irradiation, *Journal of Hazardous Materials*, **185**, 844–851.
- Chu W., Li D., Gao N., Templeton M.R., Tan C. and Gao Y. (2015), The control of emerging haloacetamide DBP precursors with UV/persulfate treatment, *Water Research*, **72**, 340–348.
- Eaton A.D., Clesceri L.S. and Rice E.W. (2005). *Standard Methods for the xamination of Water and Wastewater (PAHA)*. American Water Works Association, Washington DC, USA.
- Esfafili A., Rezaei Kalantary R., Azari A., Ahmadi E. and Gholami M. (2016), Removal of diethyl phthalate from aqueous solution using persulfate-based (UV/Na<sub>2</sub>S<sub>2</sub>O<sub>8</sub>/Fe<sup>2+</sup>) advanced oxidation process, *Journal of Mazandaran University of Medical Sciences*, **25**, 122–135.
- Fang J.-Y. and Shang C. (2012), Bromate formation from bromide oxidation by the UV/persulfate process, *Environmental Science & Technology*, **46**, 8976–8983.
- Gao Y.Q., Gao N.Y., Deng Y., Yang Y.Q. and Ma Y. (2012), Ultraviolet (UV) light-activated persulfate oxidation of sulfamethazine in water, *Chemical Engineering Journal*, **195**, 248–253.
- Gayathri P., Dorathi R.P.J. and Palanivelu K. (2010), Sonochemical degradation of textile dyes in aqueous solution using sulphate radicals activated by immobilized cobalt ions, *Ultrasonics Sonochemistry*, **17**, 566–571.
- Ghaderpoori M. and Dehghani M.H. (2016), Investigating the removal of linear alkyl benzene sulfonate from aqueous solution by ultraviolet irradiation and hydrogen peroxide process, *Desalination and Water Treatment*, **57**, 15208–15212.
- Golmohammadi S., Ahmadpour M., Mohammadi A., Alinejad A., Mirzaei N., Ghaderpoori M. and Ghaderpoori A. (2016), Removal of blue cat 41 dye from aqueous solutions with ZnO nanoparticles in combination with US and US-H<sub>2</sub>O<sub>2</sub> advanced oxidation processes, *Environmental Health Engineering and Management Journal*, **3**, 107–113.
- Guo Y., Zhou J., Lou X., Liu R., Xiao D., Fang C., Wang Z. and Liu J. (2014), Enhanced degradation of Tetrabromobisphenol A in water by a UV/base/persulfate system: Kinetics and intermediates, *Chemical Engineering Journal*, **254**, 538–544.
- Haidari S., Kamarehie B., Jafari A., Birjandi M. and Afrasyabi S. (2016), Oxalic acid degradation from aqueous solution using ozonation process in the presence of magnesium oxide nanoparticles catalyst stabilized on activated carbon, *International Journal of Environmental Health Engineering*, **5**, 23.
- Hasanpour M. and Hatami M. (2020a), Application of three dimensional porous aerogels as adsorbent for removal of heavy metal ions from water/wastewater: A review study, *Advances in Colloid and Interface Science*, **284**, 102247.
- Hasanpour M. and Hatami M. (2020b), Photocatalytic performance of aerogels for organic dyes removal from wastewaters: Review study, *Journal of Molecular Liquids*, **309**, 113094.
- He X., Armah A. and Dionysiou D.D. (2013), Destruction of cyanobacterial toxin cylindrospermopsin by hydroxyl radicals and sulfate radicals using UV-254nm activation of hydrogen peroxide, persulfate and peroxymonosulfate, *Journal of Photochemistry and Photobiology A: Chemistry*, **251**, 160–166.
- Kamali H. and Ghaziaskar H. (2010), Pressurized hot water extraction of benzoic acid and phthalic anhydride from petrochemical wastes using a modified supercritical fluid

- extractor and a central composite design for optimization, *The Journal of Supercritical Fluids*, **54**, 16–21.
- Kamarehie B., Jafari A., Ghaderpoori M., Amin Karami M., Mousavi K. and Ghaderpoury A. (2019), Catalytic ozonation process using PAC/ $\gamma$ -Fe<sub>2</sub>O<sub>3</sub> to Alizarin Red S degradation from aqueous solutions: a batch study, *Chemical Engineering Communications*, **206**, 898–908.
- Kamarehie B., Tizabi S.M.S., Heydari R., Jafari A., Ghaderpoori M., Karami M.A. and Ghaderpoury A. (2018), Data on the bisphenol A adsorption from aqueous solutions on PAC and MgO~ PAC crystals, *Data in Brief*, **21**, 746–752.
- Kamarehie B., Tizabi S.M.S., Heydari R., Sadeghi S., Ghaderpoori M., Ghaderpoury A. and Alinejad A. (2020), Catalytic ozonation process using MgO-PAC to degrade bisphenol A from aqueous solutions, *Desalination and Water Treatment*, **184**, 232–242.
- Karimi B., Rajaei M., Habibi M., Esvand M., Abdollahy M. (2013), Effect of UV/H<sub>2</sub>O<sub>2</sub> advanced oxidation processes for the removal of naphthalene from the water solution, *Journal of Arak University of Medical Sciences*, **16**, 50–64
- Khataee A. (2009), Application of central composite design for the optimization of photo-destruction of a textile dye using UV/S<sub>2</sub>O<sub>8</sub><sup>2-</sup> process, *Polish Journal of Chemical Technology*, **11**, 38–45.
- Lee Y.C., Lo S.L., Chiueh P.T. and Chang D.G. (2009), Efficient decomposition of perfluorocarboxylic acids in aqueous solution using microwave-induced persulfate, *Water Research*, **43**, 2811–2816.
- Liang C., Wang Z.S. and Mohanty N. (2006), Influences of carbonate and chloride ions on persulfate oxidation of trichloroethylene at 20 C, *Science of the Total Environment*, **370**, 271–277.
- Lin C.C., Lee L.T. and Hsu L.J. (2013), Performance of UV/S<sub>2</sub>O<sub>8</sub><sup>2-</sup> process in degrading polyvinyl alcohol in aqueous solutions, *Journal of Photochemistry and Photobiology A: Chemistry*, **252**, 1–7.
- Lin Y.T., Liang C. and Chen J.H. (2011), Feasibility study of ultraviolet activated persulfate oxidation of phenol, *Chemosphere*, **82**, 1168–1172.
- Liu C.C., Li Y.S. (2006), Decoloration of reactive Black 5 in aqueous solution by electro-Fenton reaction, *Journal of Environmental Engineering and Management*, **16**, 243–248
- Liu Y., Gao M., Gu Z., Luo Z., Ye Y. and Lu L. (2014), Comparison between the removal of phenol and catechol by modified montmorillonite with two novel hydroxyl-containing Gemini surfactants, *Journal of Hazardous Materials*, **267**, 71–80.
- Lofrano G., Rizzo L., Grassi M. and Belgiorno V. (2009), Advanced oxidation of catechol: A comparison among photocatalysis, Fenton and photo-Fenton processes, *Desalination*, **249**, 878–883.
- Massoudinejad M., Ghaderpoori M., Shahsavani A. and Amini M.M. (2016), Adsorption of fluoride over a metal organic framework UiO-66 functionalized with amine groups and optimization with response surface methodology, *Journal of Molecular Liquids*, **221**, 279–286.
- Massoudinejad M., Keramati H. and Ghaderpoori M. (2020), Investigation of photo-catalytic removal of arsenic from aqueous solutions using UV/H<sub>2</sub>O<sub>2</sub> in the presence of ZnO nanoparticles, *Chemical Engineering Communications*, **207**, 1605–1615.
- Massoudinejad M., Shahsavani A., Kamarehie B., Jafari A., Ghaderpoori M., Amini M.M. and Ghaderpoury A. (2018), Highly efficient adsorption of fluoride from aqueous solutions by metal organic frameworks: Modeling, isotherms, and kinetics, *Fluoride*, **51**, 355–365.
- Moussavi G., Aghapour A.A. and Yaghmaeian K. (2014), The degradation and mineralization of catechol using ozonation catalyzed with MgO/GAC composite in a fluidized bed reactor, *Chemical Engineering Journal*, **249**, 302–310.
- Olmez-Hanci T. and Arslan-Alaton I. (2013), Comparison of sulfate and hydroxyl radical based advanced oxidation of phenol, *Chemical Engineering Journal*, **224**, 10–16.
- Peternel I., Grcic I. and Koprivanac N. (2010), Degradation of reactive azo dye by UV/peroxodisulfate system: an experimental design approach, *Reaction Kinetics, Mechanisms and Catalysis*, **100**, 33–44.
- Rasoulifard M.H., Doust M.S.M.M. and Heydari A. (2012), Removal of acid red 14 from contaminated water using uv/s<sub>2</sub>o<sub>8</sub><sup>2-</sup> advanced oxidation process, *Water And Wastewater*, **26**, 22–31
- Rokhina E.V., Repo E. and Virkutyte J. (2010), Comparative kinetic analysis of silent and ultrasound-assisted catalytic wet peroxide oxidation of phenol, *Ultrasonics Sonochemistry*, **17**, 541–546.
- Safari G.H., Nasserli S., Mahvi A.H., Yaghmaeian K., Nabizadeh R. and Alimohammadi M. (2015), Optimization of sonochemical degradation of tetracycline in aqueous solution using sono-activated persulfate process, *Journal of Environmental Health Science and Engineering*, **13**, 76.
- Salari D., Daneshvar N., Niaei A., Aber S. and Rasoulifard M. (2008), The photo-oxidative destruction of CI Basic Yellow 2 using UV/S<sub>2</sub>O<sub>8</sub><sup>2-</sup> process in an annular photoreactor, *Journal of Environmental Science and Health, Part A*, **43**, 657–663.
- Shakir K., Ghoneimy H., Elkafrawy A., Beheir S.G. and Refaat M. (2008), Removal of catechol from aqueous solutions by adsorption onto organophilic-bentonite, *Journal of Hazardous Materials*, **150**, 765–773.
- Shiying Y., Ping W., Xin Y., Guang W., Zhang W. and Liang S. (2009), A novel advanced oxidation process to degrade organic pollutants in wastewater: Microwave-activated persulfate oxidation, *Journal of Environmental Sciences*, **21**, 1175–1180.
- Shokouhi R., Ebrahimzadeh L., Rahmani A.R., Ebrahimi S. and Samarghandi M.R. (2009), Comparison of the advanced oxidation processes in phenol degradation in laboratory scale, *Water and Wastewater*, **4**, 30–35
- Shukla P., Fatimah I., Wang S., Ang H. and Tade M.O. (2010a), Photocatalytic generation of sulphate and hydroxyl radicals using zinc oxide under low-power UV to oxidise phenolic contaminants in wastewater, *Catalysis Today*, **157**, 410–414.
- Shukla P., Wang S., Singh K., Ang H. and Tade M.O. (2010b), Cobalt exchanged zeolites for heterogeneous catalytic oxidation of phenol in the presence of peroxy monosulphate, *Applied Catalysis B: Environmental*, **99**, 163–169.
- Shukla P.R., Wang S., Sun H., Ang H.M. and Tade M. (2010c), Activated carbon supported cobalt catalysts for advanced oxidation of organic contaminants in aqueous solution, *Applied Catalysis B: Environmental*, **100**, 529–534.
- Sun H., Feng X., Wang S., Ang H.M. and Tade M.O. (2011), Combination of adsorption, photochemical and photo-catalytic degradation of phenol solution over supported zinc



- oxide: Effects of support and sulphate oxidant, *Chemical Engineering Journal*, **170**, 270–277.
- Sun H., Wang S., Ang H.M., Tade M.O. and Li Q. (2010), Halogen element modified titanium dioxide for visible light photocatalysis, *Chemical Engineering Journal*, **162**, 437–447.
- Wang C.-W. and Liang C. (2014), Oxidative degradation of TMAH solution with UV persulfate activation, *Chemical Engineering Journal*, **254**, 472–478.
- Xu X., Li S., Hao Q., Liu J., Yu Y. and Li H. (2012), Activation of persulfate and its environmental application, *International Journal of Environment Bioenergy*, **1**, 60–81.
- Yazdanbakhsh A., Hashempour Y. and Ghaderpouri M. (2018), Performance of granular activated carbon/nanoscale zero-valent iron for removal of humic substances from aqueous solution based on experimental design and response surface modeling, *Global Nest Journal*, **20**, 57–68.
- Yoon S.-H., Jeong S. and Lee S. (2012), Oxidation of bisphenol A by UV/S<sub>2</sub>O<sub>8</sub>: Comparison with UV/H<sub>2</sub>O<sub>2</sub>, *Environmental Technology*, **33**, 123–128.
- Zarrabi M., Rahmani A.R., Samarghandi M.R. and Barjasteh Askary F. (2013), Investigation the zero-valent iron (ZVI) performance in the presence of uv light and hydrogen peroxide on removal of azo dyes acid orange 7 and reactive black 5 from aquatic solutions, *Iranian Journal of Health and Environment*, **5**, 469–478.
- Zhao J., Zhang Y., Quan X. and Chen S. (2010), Enhanced oxidation of 4-chlorophenol using sulfate radicals generated from zero-valent iron and peroxydisulfate at ambient temperature, *Separation and Purification Technology*, **71**, 302–307.