

Optimization of Lipid Production from Paddy Straw Using Dilute Acid Pretreatment and Fermentation by *Rhodospordium Toruloides*

Dr. S. Sumathi^A and Dr. C. Meiaraj^B

^AAssistant Professor, Department of Civil Engineering, Government college of Engineering, Thanjavur-613402, Tamil Nadu, India



^BProfessor, Department of Civil Engineering, Government College of Engineering, Bodinayakanur, Theni-625582, Tamil Nadu, India

Received: 17/06/2024, Accepted: 19/09/2024, Available online: 28/10/2024

*to whom all correspondence should be addressed: e-mail: sumathigcetnj@gmail.com

<https://doi.org/10.30955/gnj.06278>

Graphical abstract

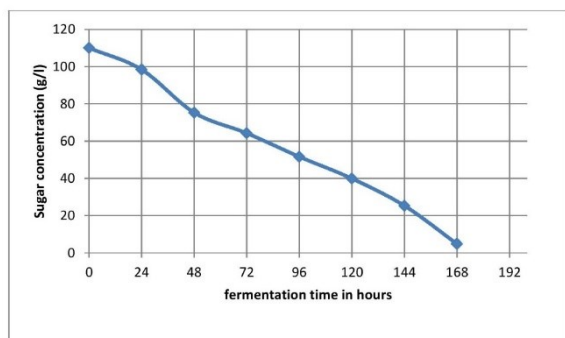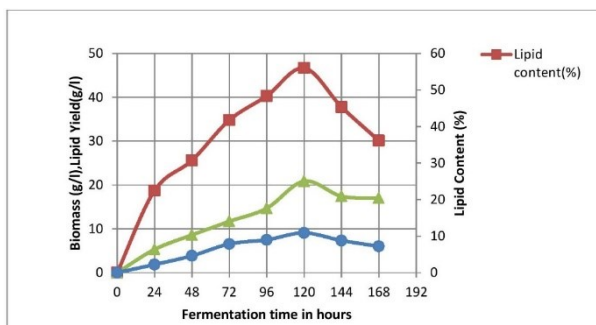

Abstract

Among the lignocellulose wastes Paddy Straw is the most abundant one which have the ability of being used as a feedstock for production of biofuel. In this work, paddy straw is subjected to dilute acid pretreatment, detoxification and fermentation processes for the production of lipids. *Rhodospordium Toruloides*, an oleaginous yeast strain is used for fermentation and produce biomass and lipids. Straw of paddy is pre-processed with 2% (v/v) the sulfuric acid at 121° C for an hour that is 60 minutes and then detoxified. Fermentation process has to be optimized in order to achieve higher lipid yields and higher cellulose content. In this study, optimization is carried out by using response surface

process and Box Behnken Design (BBD) for learning impact of concentration of inoculum, pH and temperature on fermentation. During hydrolysis and fermentation processes, sugar concentration is analysed using dinitro salicylic acid reagent and standard curve of glucose. Observations show that highest yield of sugar from the dilute acid pre-treatment is 3.3 g/L. Optimum conditions for lipid yield from fermentation process is 10.88 g/L at a pH of 6, at a temperature of 25°C and at 10% inoculum loading.

Keywords: pre-treatment, detoxification, fermentation, hydrolysis, paddy straw

1. Introduction

Lignocellulosic biomass contains cellulose, hemicelluloses and lignin. It is widely known as a viable source of sugars and useful for biofuel production and value-added biomaterials [Cassman and Liska 2007; Himmel *et al.* 2007]. As a reliable source of production of biofuel, rice straw has earned considerable scientific attention. Rice Straw (RS) is considered the most suitable candidate for the production of biofuels as it is renewable and abundantly available throughout the world [Himmel *et al.* 2007; Binod *et al.* 2010; Sun and Cheng 2002]. Production of rice results in 650 to 975 million tons of rice straw annually. While most of the rice straw is used to feed the cattle and the remaining is allowed to go waste [Park 2015]. In order to make a better use of the valuable rice straw, many researchers use it to produce biofuels like ethanol, methane and biodiesel [Xiaochen *et al.*]. When compared to other carbon sources that use oleaginous microorganisms for lipid accumulation, rice straw shows great promise due to its easy availability and low-cost [Vajpeyi and Chandran 2015; Lee *et al.* 2012]. Oleaginous organisms like fungi, bacteria, microalgae and yeast have been used as fermenting agents in biodiesel production. Research shows that accumulation and composition of lipids and fatty acids is directly influenced by the micro organic strain, substrate and culture environment. *Rhodospordium toruloides*, anoleaginous yeast is a red

basidiomycete derived from the wood pulp of coniferous trees. It synthesizes fatty acids and plays a vital part in designing lipid production pathways. It is used widely in the production of lipids where agro waste is used as a substrate.

This study proposes the use of paddy straw as an alternative to carbon energy sources. The concentration of sugar is measured to optimize acid pretreatment process and various detoxification processes are used to remove inhibitors from paddy straw hydrolysate. *Rhodospiridium toruloides* is used to produce biomass, lipid content and lipid yield through fermentation. Response surface methodology with BBD is used to optimize fermentation parameters and production of lipid.

2. Materials and Methods

2.1. Paddy Straw Hydrolysate (PSH)

Paddy straw is collected from local farmland, air-dried, milled and screened. Particles with sizes lesser than 0.75 mm are selected and stored at a temperature of 4°C until they are used. Pretreated paddy straw is mixed with 2% (v/v) H₂SO₄ with a rate of 10% (w/v) of the solid loading. The amalgamation is treated under an autoclave at 121°C and 15 psi for 60 minutes. After the process of hydrolysis, liquid fraction (PSH) is filtered and its pH is then adjusted as 5.5 using 10M NaOH. The filtrate is analysed for sugar concentrations using DNS method.

2.2. Detoxification of Paddy Straw Hydrolysate (DPSH)

Detoxification of paddy straw involves over-liming and adsorption processes. During detoxification, liquid hydrolysate is heated up to 70°C for 40 minutes and Ca(OH)₂ is added to raise its pH to 10.5 and resulting mix is heated to 50°C for half an hour. During the adsorption process, Activated Charcoal (AC) is mixed with the hydrolysate in the ratio of 3% (w/v) and resulting combination is incubated at a temperature of 30°C and shaken at 150 rpm for an hour in an incubator shaker. The final AC detoxified liquid is obtained by adjusting the pH to 5.5 and carrying out the filtering process.

2.3. Microorganism, Media Preparation, Pre-cultivation and Cultivation

Rhodospiridium toruloides (MTCC 9565) is acquired from MTCC, CSIR Institute of Microbial Technology, Chandigarh, India. The obtained sample is revived in distilled water. The cells are maintained in a medium of yeast agar at 4°C. Pre-culture is done on precultivation containing (glucose) C₆H₁₂O₆ (10.0 g/L), peptone (5.0 g/L), extract of yeast (5.0 g/L) and malt extract (3.0 g/L) at 25°C and shaken at 150 rpm for 24 hours. Then, the pre-culture is injected into the medium of culture in ratio of 1:10 (v/v).

Batch fermentation experiments are done in 500 ml of flasks that has 250 ml of nitrogen limiting liquid medium to study the impact of inhibitors on the growth of yeast and also the accumulation of lipid. Further hydrolysate, the medium of culture also contains 0.1 g/L (NH₄)₂SO₄, 0.75 g/L extract of yeast, 0.4 g/L KH₂PO₄ and 1.5 g/L MgSO₄·7H₂O. The value of pH of medium of liquid is then adjusted to

5.5, 6.0 and 6.5 to suit needs of various trials. Then, 5ml, 10ml and 15ml of inoculum are put to medium and culture is maintained at 25°C and shaken in an orbital shaker at 150 rpm for about 10 days.

2.4. Optimization of Lipid Production using Box Behnken Design (BBD)

A model is developed using 2-level 3-factor design of Box Behnken for assessing effects of concentration of inoculum (A), pH value (B) and time of fermentation (C) on lipid production using *R. toruloides* and DPSH. This study involves 17 trials of the experimental plan and the variables that are independent are studied at various levels, called low (-1) and the high (+1), and their values are tabulated in the **Table 1**. Experimental readings are obtained in triplicate and the response variable (Y) is obtained by averaging the lipid concentration produced after fermentation. **Table 2** shows the design of experiment employed in this research. Variable (Y) is integrated into a model of second order to compare variables of response with the variables that are independent. The software called Design Expert (Version 13.0) is used to determine and analyse the second order polynomial coefficients. The analysis of variance is used to formulate the statistical model. This analysis includes Fisher's F test for determining overall significance of model, its probability p (F), coefficient of correlation R and coefficient of determination R², that estimates suitability of a regression model. 3D contour plots are prepared for each variable and for the design of quadratic models. Design Expert software is employed to generate response surface curves.

Table 1. Coding and the levels of factors of experiment

Factor	Name	Units	Coded Low	Coded High
			-1	+1
A	Inoculum concentration	%	5.00	15.00
B	pH		5.50	6.50
C	fermentation time	days	7.00	9.00

Biomass, content of lipid and profile of fatty acid of lipid are taken as given in [Zhu *et al.* 2008]. The hydrolysate samples are analysed using HPLC and using the method described in [Huang *et al.* 2009] and total concentration of reducing sugar is measured using the method DNS [Miller 1959].

3. Results and Discussion

3.1. Effects of H₂ SO₄ Concentrations on Paddy Straw Pretreatment

Hydrolysis is performed on 1%, 2%, 3% and 4% (v/v) H₂SO₄ at a loading rate of 10% (w/v) at 121°C for 30, 45, 60 and 120 minutes to optimize conditions and obtain maximum fermentable sugars (particularly, glucose) from paddy straw. Formation of glucose from paddy straw is found to be at its highest with 2% H₂SO₄ hydrolysed for 60 minutes. Acid hydrolysis breaks down the complex polysaccharides in the rice straw to simple fermentable sugars. Dilute acid breaks down the cellulose and hemicelluloses into

fermentable sugars, which can be used by microorganisms. When hemicelluloses degrade, glucose, acetic acid, mannose, xylose and galactose are produced [Fei *et al.* 2011] and cellulose is hydrolysed to glucose. When hydrolysis is carried out at higher temperatures, higher acid concentrations and with prolonged pretreatment periods, xylose is degraded to furfural. 5-hydroxymethyl furfural is

formed by the degradation of hexose and such by-products inhibit fermentation [Palmqvist and Hahn-Hägerdal 2000]. Therefore, in the subsequent experiments 2% H₂SO₄ is used to prepare the PSH. During the detoxification process, glucose concentration increases and the concentration of inhibitors like HMF and furfural are reduced by 99%.

Table 2. Arrangement and response of design of Box–Behnken

Run	Coded Level			Lipid yield (g/l)	
	A	B	C	Actual value	Predicted value
1	0	0	0	10.88	10.88
2	0	1	-1	7.80	7.65
3	1	0	1	8.20	8.29
4	0	-1	-1	7.23	7.43
5	0	0	0	10.88	10.88
6	0	0	0	10.88	10.88
7	1	-1	0	8.60	8.36
8	0	-1	1	7.03	7.18
9	0	0	0	10.88	10.88
10	-1	1	0	8.60	8.84
11	-1	-1	0	7.68	7.57
12	1	0	-1	7.50	7.54
13	-1	0	-1	8.30	8.21
14	-1	0	1	7.60	7.56
15	0	0	0	10.88	10.88
16	1	1	0	8.00	8.11
17	0	1	1	8.20	8.00

Table 3. Response: lipid yield

Source	Sum of Squares	df	Mean Square	F-value	p-value	
Method	34.00	9	3.78	90.92	< 0.0001	significant
A-Inoculum concentration	0.0018	1	0.0018	0.0433	0.8410	
B-pH	0.5305	1	0.5305	12.77	0.0091	
C-Fermentation duration	0.0050	1	0.0050	0.1203	0.7389	
AB	0.5776	1	0.5776	13.90	0.0074	
AC	0.4900	1	0.4900	11.79	0.0109	
BC	0.0900	1	0.0900	2.17	0.1846	
A ²	5.69	1	5.69	136.95	< 0.0001	
B ²	9.44	1	9.44	227.25	< 0.0001	
C ²	13.91	1	13.91	334.75	< 0.0001	
Residual	0.2909	7	0.0416			
Lack of Fit	0.2909	3	0.0970			
Pure Error	0.0000	4	0.0000			
Core Total	34.29	16				

coding of factor is **Coded**; Sum of squares is **Type III – Partial**; **Model F-value** of 90.92 denotes that method is significant. There is only a 0.01% chance that a value of F of this large can happen because of noise.

Figure 1a shows time course of growth of cell and accumulation of lipid of *R. Toruloides* in DPSH. **Figure 1b** shows sugar concentration during fermentation process. In previous work [Huang *et al.* 2009], during fermentation of rice straw hydrolysate a lag occurs on the first day and makes growth and the accumulation of lipid are hardly detectable. This can be attributed to the existence of inhibitors in the fermentation medium. However, the biomass begins to grow and increase during 2nd day, denoting adaptation of the cells to new environment of fermentation. From the second day, glucose, galactose, xylose and arabinose are used as carbon sources simultaneously. These four sugars are completely used by *R. toruloides* cells in different orders and rates. From day

three, the content of lipid of yeast cells increases sharply and reaches a higher level of 46.7% on day six. The maximum concentration of lipid of 10.88 g/L is obtained on sixth day. After this period, lipid content does not increase but the biomass grows continuously. Studies conducted in [Zhu *et al.* 2008; Huang *et al.* 2009] report a similar condition and use of the lipid that is accumulated for the growth of cell can lead to this condition. Compared to [Zhu *et al.* 2008], the observations are similar to those obtained using already treated hydrolysate of paddy straw (11.5 g/L).

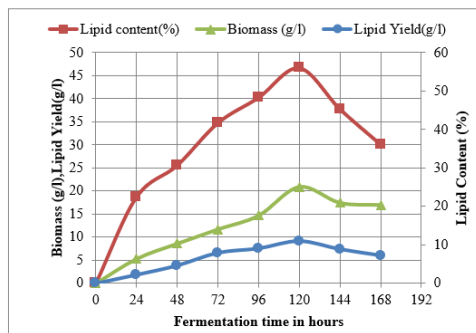


Figure 1a. Production of oil of microbial on Paddy straw that is pre-treated using sulphuric acid hydrolysate by *Rhodosporidium Toruloides* (a) course of time of growth of cell and accumulation (□)lipid content (△) Biomass (○) yield of lipid and total sugars

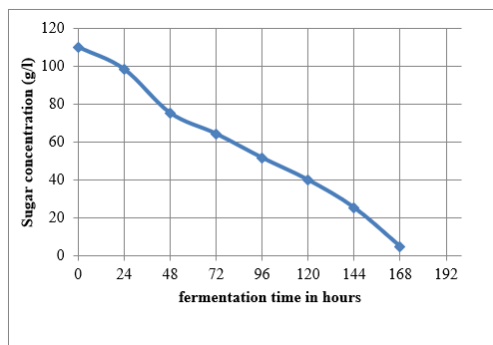


Figure 1b. Time course of sugar utilization

Conditions of Fermentation: concentration of inoculum 10%, pH 6.0, temperature 25°C, 150 rpm.

3.2. Optimization of Lipid Yield

Design of Box Behnken and RSM are used for studying optimum conditions for lipid yield and higher glucose concentrations. A 2-level 3-factor BBD is used for evaluating effects of three factors discussed in previous sections on lipid production. **Table 2** shows the BBD experimental data and proves that lipid concentration is much influenced by conditions maintained during the process of fermentation. Regression equation is obtained after variance analysis, provides the response level as a function of three variables that are independent using analysis of multiple regression. A quadratic approach for concentration of lipid of *R. toruloides* is shown below (regarding coded factors):

$$\begin{aligned} \text{Lipid yield} = & 10.88 + 0.015 * A + 0.2575 * B + 0.025 * C \\ & - 0.38 * AB + 0.35 * AC + 0.15 * BC - 1.1625 * A^2 \\ & - 1.4975 * B^2 - 1.8175 * C^2 \end{aligned} \quad (3)$$

In this, Y represents predicted concentration of lipid (g/L) and A, B and C represent the inoculum concentrations as (%), pH and time of fermentation (in days) respectively. A combination of triglycerides, free fatty acids, and other lipid classes like phospholipids and sterols are typically present in the microbial lipids that *Rhodosporidium toruloides* produces. For accurate detection of lipid profile, the HPLC or the GC-MS models are employed for this process.

Table 3 shows findings of model quadratic polynomial in analysis as variance carried out using Design Expert software. The table demonstrates that the proposed model is significant in terms of very high F-value (90.92) and lesser P-value ($P < 0.0001$). The reliability of the proposed model for lipid production confirmed by a R^2 value of 0.9915 indicating that it is on good terms between values of experiment and values which are predicted. Adj- R^2 value of 0.9806 suggests that the variation in total of 98.06% during the concentration of lipid is attributed to variables which are independent. The missing of an optimal value is not important. $P = 0.0505$ suggests that equation is sufficient enough to predict the concentrations of lipid under all situations. Among method terms B, AB, AC, A^2 , B^2 and C^2 are significant with 99% of level of probability and other terms are not significant as they have lower probability levels. A #-D surface of response plot representing the equation of regression mentioned is used to confirm relationship among response and factor levels of each of the variable. Optimal levels of variables are determined visually using the plots [Haider and Pakshirajan 2007]. **Figure 2** indicates the response surface curves. An observable interaction between each pair of variables is clearly shown by the surface plots. Interactions between the pH and the concentration of inoculum, the concentration of inoculum and fermentation duration is important (P -value < 0.05). Design Expert software analysis shows that optimal values of three important variables for lipid fermentation using *R. toruloides* are 10% inoculum concentration, 6.0 initial pH and six days of fermentation.

Table 4. Production of lipid on different residues of agro-Industries by several microbes

Strain	source of carbon	Glucose Concentration (g/L)	Lipid concentration (g/L)	Reference
<i>Y. lipolytica</i>	Industrial fats	10	3.8	Papanikolaou, S. et al. (2001)
<i>M. isabellina</i>	Glycerol	26.8	3.3	Fakas, S. et al. (2009)
<i>L. starkeyi</i>	Sewage sludge	40	6.4	Angerbauer, C. et al. (2008)
<i>T. fermentans</i>	Molasses	150	12.8	Zhu, L.Y, et al. (2008)
<i>T. fermentans</i>	Rice straw hydrolysate	116.9	11.5	Huang, C. et al., (2009)
<i>T. fermentans</i>	Sugarcane bagasse hydrolysate	123.5	15.8	Huang C, et al., (2012)
<i>R. toruloides</i>	Paddy straw hydrolysate	110	10.88	This study

3.3. Production of lipid under Optimal Conditions

The parameters of fermentation are given as follows: 10% inoculum concentration, pH value of 6.0 and 6 days of fermentation period. Under such conditions, the predicted concentration of lipid of 10.88 g/L can be achieved. **Table 4** shows results of the present work and those carried out with various residues of agro-industries as feedstock. Although lipid productivity of *R. toruloides* using paddy straw hydrolysate will be as maximum as that of *Y. lipolytica* of industrial fats using *R. toruloides* can produce even higher lipid concentrations. This makes *R. toruloides* a very reliable candidate for production of lipid using inexpensive and abundantly available lignocellulosic materials.

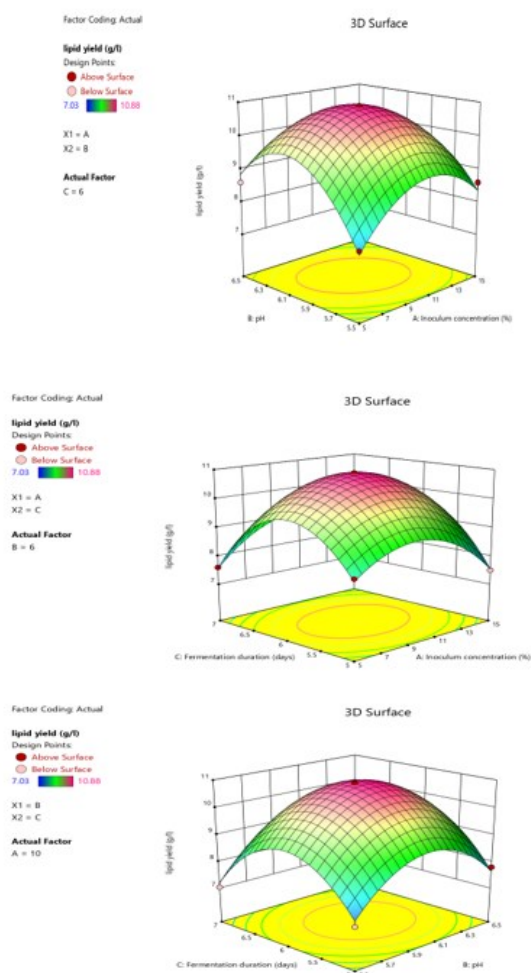


Figure 2. Plots of surface of Response showing the interaction of various variables. The interaction among (a) concentration of inoculum and fermentation duration (b) pH and inoculum concentration (c) fermentation duration and pH

4. Conclusion

Owing to its effectiveness, low-cost and abundance, PSH is highly suitable for microbial lipid production. PSH prepared with 2% H_2SO_4 produces optimal glucose concentration, maximum growth of biomass and lipid accumulation. Detoxified paddy straw hydrolysate is employed for growth of cell and also for accumulation of lipid using *R. toruloides*. Optimization of parameters of fermentation using RSM results in 10.88 g/l lipid yield, with a pH of 6.0 and with a

fermentation period of 6 days and produce a maximum lipid yield of 46.7%. *R. toruloides* proves to be a very promising yeast strain for the production of microbial lipids using PSH.

Declaration

Conflict of Interest

The authors declare no conflict of interest.

References

- Angerbauer C, Siebenhofer M, Mittelbach M, Guebitz G M, (2008). Conversion of Sewage Sludge into Lipids by *Lipomyces Starkeyi* for Biodiesel Production. *Bioresource Technology*. 99, 3051–3056.
- Anusuya M, Mohammed Asif M, Chitturi S, Balaji E, Ravichandran M, Yedukondalu G, Shankar E, Rajaram A. DRL-Based Kinetic and Thermal Energy Property Detection for Welded Joint Performance Analysis. *Surface Review and Letters*. 2024 Aug 9.
- Binod P, Sindhu R, Singhania RR, Vikram S, Devi L, Nagalakshmi S, Kurien N, Sukumaran RK, Pandey A.N, (2010). Bioethanol Production from Rice Straw: An Overview. *Bioresource Technology*. 101:4767–4774.
- Cassman GK, Liska AJ, (2007). Food and Fuel for All: Realistic or Foolish? *Biofuels Bioproducts, Biorefining*. 1:18–23.
- Fakas S, Panayotou M G, Papanikolaou S, Komaitis M, Aggelis G, (2007). Compositional Shifts in Lipid Fractions during Lipid Turnover in *Cunninghamella echinulata*. *Enzyme and Microbial Technology*. 40, 1321–1327.
- Fakas S, Papanikolaou S, Batsos A, Panayotou G M, Mallouchos, Aggelis G, (2009). Evaluating Renewable Carbon Sources as Substrates for Single Cell Production by *Cunninghamella echinulata* and *Mortierella isabellina*. *Biomass Bioenergy*. 33, 573–580.
- Fei. Q., Chang H.N., L. Shang, J.D. Choi, N. Kim, J. Kang, (2011). The Effect of Volatile Fatty Acids as a Sole Carbon Source on Lipid Accumulation by *Cryptococcus albidus* for Biodiesel Production, *Bioresource Technology*, 102 (3) 2695–2701.
- Haider, M., Pakshirajan, K, (2007). Screening and Optimization of Media Constituents for Enhancing Lipolytic Activity by Soil Microorganism using Statistically Designed Experiments. *Applied Biochemistry and Biotechnology*. 141, 377–390.
- Huang C, Wu H, Feng Li R, Zong M H, (2012). Improving Lipid Production from Bagasse Hydrolysate with *Trichosporon fermentans* using Response Surface Methodology, *New Biotechnology*. 29, 3.
- Huang C, Zong MH, Wu H, Liu QP, (2009). Microbial Oil Production from Rice Straw Hydrolysate by *ichosporon fermentans*. *Bioresource Technology*, 100, 4535–4538.
- Ismail Y, Meena M, Megala J, Sathyaseelan P, Nandha Kumar SK, Santhanakrishnan M, Rajakumar PT, Rajaram A. (2023 Oct 1). Derivation of chitosan-based composite material with root extracts of *Calotropis gigantea* accelerating wound healing. *Oxidation Communications*.;46(4).
- Lee S.U., Jung K., Park G.W., (2012). Bioprocessing Aspects of Fuels and Chemicals from Biomass, *Korean J. Chem. Eng.* 29 (7), 831–85.
- Michael E. Himmel, Shi-You Ding, David K. Johnson, William S. Adney, Mark R. Nimlos, John W. Brady, Thomas D. Foust, (2007). Biomass Recalcitrance: Engineering Plants and Enzymes for Biofuel Production. *Science*. 315:804–80.

- Miller, G. (1959). Use of Dinitrosalicylic Acid for Determination of Reducing Sugars. *Analytical Chemistry*. 31, 426–428.
- Palmqvist E, Hahn-Hägerdal B, (2000). Fermentation of Lignocellulosic Hydrolysates. II: Inhibitors and Mechanisms of Inhibition, *Bioresource Technology*. 74: 25–33.
- Papanikolaou, S. *et al.* Kinetic Profile of Cellular Lipid Composition in Oleaginous
- Park G.W., Kim I., Jung K., Seo C., J.I. Han, H.N. Chang, Y.C. Kim, (2015). Enhancement of Volatile Fatty Acids Production from Rice Straw via Anaerobic Digestion with Chemical Pretreatment, *Bioprocess Biosyst. Eng.* 38 (8), 1623–1627.
- Patnaik RK, Dwivedi YD, Srivastava BK, Arulmozhi A, Prasad DV, Dillibabu SP, Gopala Gupta AS, Rajaram A. (2024 Aug 9). Metal-Supported Solid Oxide Fuel Cells: Synthesis and Electrochemical Properties Analysis using Optimization Method. *Surface Review and Letters*.
- Raymond H. Myers, Douglas C. (2009). Montgomery, Christine M. Anderson-Cook: Product and Process Optimization using Designed Experiments and Response Surface Methodology: John Wiley & Sons, New York, 14th edition.
- Sun Y, Cheng J, (2002). Hydrolysis of Lignocellulosic Materials for Ethanol Production: A Review. *Bioresource Technology*. 83:1–11.
- Vajpeyi S, Chandran K, (2015). Microbial Conversion of Synthetic and Food Waste Derived Volatile Fatty Acids to Lipids, *Bioresource Technology*. 188, 49–55.
- Xiaochen.Y. Zheng, S. Chen, (2014). Microbial Oil Production from Biomass Hydrolysate by Oleaginous Yeast Strains, Google Patents.
- Yarrowia lipolytica* Capable of Producing Cocoa Butter Substitute from Industrial Fats. (2001). *J. Gen. Mol. Microbiol.* 80, 215–224.
- Zhu, L.Y, M H Zong, H Wu, (2008). Efficient Lipid Production with *Trichosporon fermentans* and its Use for Biodiesel Preparation. *Bioresource Technology*, 99, 7881–7885.