

# Recent Advances of Using Polymer Nanocomposites for the Removal of Heavy Metal Ions from Waste Water: A Review


Vaneet Kumar<sup>a</sup>, Diksha Bhatt<sup>a</sup>, Saruchi<sup>b</sup>, JS Dhani<sup>c</sup>, Maninder Pal Singh<sup>c</sup>

<sup>a</sup> Department of Natural Sciences, CT University, Ferozepur Road, Ludhiana, Punjab, India

<sup>b</sup>St. Solider Group of Institutions Jalandhar, Punjab

<sup>c</sup>CTIEMT, CTIPS, CT Group of Institutions Jalandhar Punjab

## Graphical Abstract

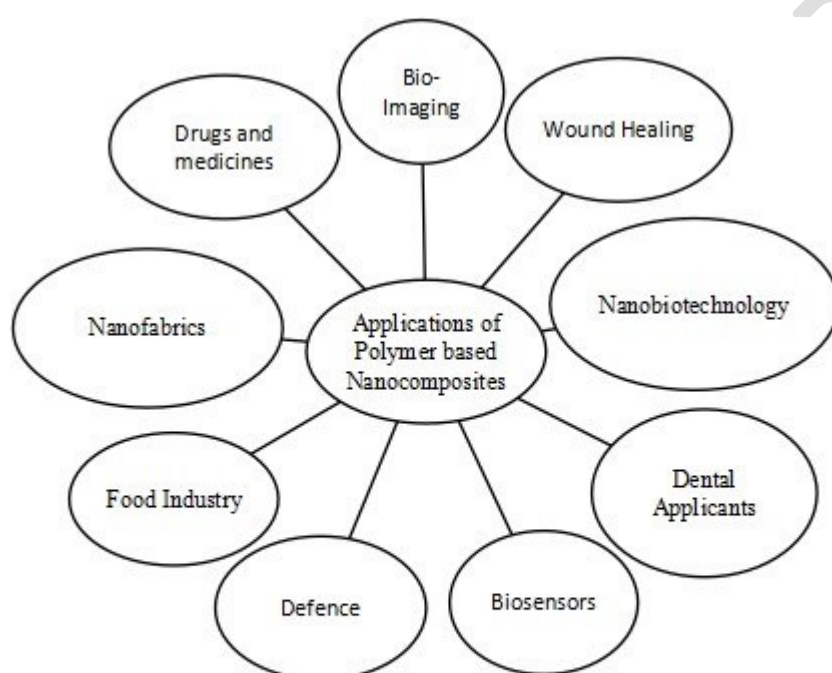

## Applications of Polymer based Nanocomposites

### Abstract

A major factor in the development of modern environmental engineering is the necessity of treating water pollutants. The effective removal of metallic ions of wastewater systems, using adsorption techniques, different adsorbents have been widely utilized; among these adsorbents, polymer-based composites have garnered a lot of interest due to their characteristics of environmental harmlessness and degradability. By combining the best features of both polymer and nanocomposites can offer improved chemical, physical, mechanical, and compatibility over single polymers. The review underscores the importance

of polymer-based nanocomposites in offering inventive wastewater treatment methods. A thorough examination of current research and obstacles in the field of developing nanotechnology highlights these materials' ability to address the intricate problem of heavy metal ion contamination. The removal of heavy metal ions from various wastewater sources can be accomplished sustainably and effectively by integrating nanocomposites, with an emphasis on their design and manufacture. The investigation of new advances in polymer nanocomposites for the removal of heavy metal ions lays the groundwork for further study and creativity in this crucial area of environmental engineering. Using the adaptability of polymers and the special qualities of nanomaterials, this strategy develops cutting-edge solutions to deal with the intricate problems brought on by heavy metal ion pollution. Through a focus on accuracy in the design and manufacturing of these nanocomposites, scientists and industry professionals can create materials that are specialised, effective, and can make a substantial contribution to the development of wastewater treatment systems. The purpose of this research is recent analyses and challenges in the field of nanotechnology development. The data presented in this analysis will be helpful for future efforts to design and produce polymer-based Nanocomposites for the removal of a wide range of heavy metal ions

**Keywords:** Nanocomposites; Chitosan; Nanocomposites; Polymer: Gelatine

## **1. Introduction**

Over the ages, humans have gradually increased their abilities to identify contamination of water. While the drinking taps water is portable and safe, all over the world. Tragically, this scenario is not generally relevant because more than 844 million individuals globally lack safe drinking water access according to the data of WHO/UNICEF in the year 2017. Meanwhile, under the auspices of the UN Sustainable Development Goals, these figures are decreasing day by day. In contrast, industrialization, changes in global climate and rural-to-urban movement of the population from rural areas to urbanization lead to a decrease in water availability, and it appears difficult to achieve additional gains. The growing pollution caused by industrialization and urbanization has harmed the future of humanity. Heavy metals, dyes, chemical compounds, and other pollutants are contaminating drinking water at an alarming rate. Amongst some of the world's numerous environmental issues, one of the most pressing is the efficient use of water resources. The treatment of wastewater released from anthropogenic sources including such industries, shipping, nuclear, battery, metallurgical,

mining, tannery, chemical, agriculture, and numerous others is the solution of all these. Wastewater treatment is necessary to reduce heavy metal discharge, which is among the most toxic or physiologically hazardous aspects of industrial wastes [1,2]. As a result, contamination with heavy metals has become a major issue all across the world, particularly in developing nations. Metals with densities greater than  $5 \text{ g/cm}^3$ , such as zinc (Zn), lead (Pb), chromium (Cr), arsenic (As), mercury (Hg), and others, are classified as heavy metals [3]. These heavy metals' electronic shells and atomic structure indicate their reactivity, complexation and significant biological and physiological activity, which lead to a variety of health and environmental hazards. In 1797, chromium was recognized inside the mineral occurrences ( $\text{PbCrO}_4$ ) as a component with strong colouring potential and also was widely employed as a pigment, from where the word chromium was formed, where chroma' signifies colour. Cr is released into the environment via soil, water, soil, dust, volcanic, atmospheric gases, and rocks [4]. Typically, chromium is tightly linked to important rock-derived elements and Fe oxides [5]. Wastewater frequently contains lead, cadmium, mercury, arsenic, nickel, copper and zinc. The industrial operations, agricultural runoff, and technological waste disposal are some of the ways that these metals end up in water supplies [6,7]. Every heavy metal has unique health and environmental risks. Lead and cadmium, for instance, are recognised neurotoxins that, even in little amounts, have a negative impact on human health [8,9]. The mercury is hazardous to both people and wildlife since it is known to bioaccumulate in aquatic environments [10]. Groundwater contamination is a common source of arsenic, which is linked to a number of health problems, notably cancer [11,12]. Even while trace amounts of nickel, copper, and zinc are necessary, when their concentrations beyond allowable limits, they can cause ecological imbalances and adversely affect aquatic life [13]. To reduce the negative effects of these heavy metals on the environment and protect human health, appropriate treatment of wastewater methods has to address the various issues they raise [14]. Most countries' monitoring agencies have set the permissible value for heavy metals in drinking water sources [15]. Thus, in order to avoid the negative implications of water pollution, such as contaminants in drinking water, wastewater must be treated before it is discharged into the environment [16]. The substantial heavy metal routes in wastewater and water can be caused by nature or by humans. Natural heavy metal discharges encompass particulates, aerosols, extraction operations, volcanic activity, urban runoff, soil erosion, and so on, whereas human impact includes metal finishing, mining, electroplating processes, textile industries, as well as the nuclear power [17]. Furthermore, anthropogenic activities including the release of heavy metal-containing harmful chemicals into river systems,

massive population increase arising in focused household purposes, and the growth of industries and agriculture all had an impact on the environment [18-20]. Heavy metal contamination is a major concern because of its toxicity to animals, plants and humans. Heavy metal concentrations that are excessive have severe consequences for the environment. Heavy metals enter human tissues via a variety of absorption mechanisms, including the soil-food cycle, direct consumption, inhalation, skin contact, and oral intake [21]. Heavy metals at an elevated level can operate as environmental poisons in both terrestrial and marine ecosystems [22,23]. Developing and emergent pollutants are frequently discovered in natural water sources, wastewater effluents, as well as sources of drinking water with the danger of affecting the community and environmental quality. This fact underscores the importance of capital revitalization and technological modernisation of underutilized facilities for water treatment. Pollution management and better water treatment methods not only help to reduce lost productivity as well as health-care expenditures, but they also help to increase socioeconomic capability for economic growth [24,25]. Technological innovation has proven crucial in reducing the cost burden of maintaining and operating aging wastewater as well as potable water treatment facilities. The world's population is increasing day by day, putting the globe at risk of acute water scarcity.

Although a trace amount of various heavy metals is vitally required for humans due to the presence of certain cofactors or vitamins or cofactors, overexposure or ingestion of them might have harmful consequences. Furthermore, these poisonous heavy metal ions can cause a variety of bodily and mental abnormalities, including vomiting, nausea, asthma, diarrhoea, pneumonia, skin degradation, liver and kidney malfunction, genetic malformations, losing weight, and various malignancies in accordance with the toxicities and effects of certain heavy metals are highlighted in Table 1 by the World Health Organization (WHO) [26].

**Table 1. Toxicity and permissible limit of heavy metals and their ions in drinking water according to WHO**

Heavy metals	Contamination Sources	Drinking water Permissible limit in ppm	Toxicity	References
Lead, Pb (II)	Industrial fuel leaded gasoline and mining	0.05	Anaemia, kidneys and liver damages	[26]

	sources, Mining resources		abnormal mental growth in children, insomnia, muscle weakness, dizziness, headache, irritability, reproductive system damage	
Arsenic, As (V), As (III)	Industrial and chemical wastes	0.05	Bladder, lungs and skin cancers	[27]
Mercury, Hg (II)	Chemicals, trash incineration, electronic components, barometers, thermometers, batteries, dental amalgams, textile, photography, or pharmaceutical industries, as well as the burning of fossil fuels are all examples of environmental issues.	0.001	Dyspnea, Neurotoxic, chest pain kidney, pulmonary dysfunction, etc.	[28]
Chromium, Cr (VI), Cr (III)	Industries involved in leather tanning, electroplating, metal polishing, nuclear power, dyeing, photography, and textiles	0.05	Skin irritation, Lung cancer	[29,30]
Cadmium, Cd (II)	Ni and Cd batteries, nuclear fission, welding, electroplating, plastics	0.005	Kidney damage, High blood pressure, testicular	[31,32]

	and paints, fertilizers, etc.		tissue loss, osteoporosis, as well as red blood cell apoptosis are all symptoms of Itai-Itai illness.	
Zinc, Zn (II)	Industrial procedure	5.0	Stomach pains, rashes on the skin, vomiting, nausea, or anemia	[32]
Copper, Cu (II)	Industrial procedure	1.5	Diarrhea, stomach pain, nausea, vomiting, or even death	[33,34]
Cobalt, Co (II)	Electroplating, batteries, dye, mines, nuclear power plants, petroleum, metallurgical, and electronics industries	0.01	Nausea, diarrhoea, asthma, kidney congestion, wrinkling of the skin, and loss of weight, pneumonia,	[35,36]
Nickel, Ni(I)	Manufacturing batteries, forging, mining, and electroplating are other related industries.	0.1	Lung and renal issues, dermatitis, immunological hypersensitivity, and carcinogenic	[37,38]

## 2. Polymer-nanotechnology for water treatment

In the realm of heavy removal of metal ions in particular, polymer nanotechnology has shown itself to be a creative and promising method of treating water [39,40]. The advantage of polymer nanocomposites, that combine the benefits of nanoscale substances with polymer benefits provide improved efficiency, selectivity, or adsorption in the removal of heavy metal ions in water sources [41,42]. These nanocomposites are frequently made of polymers that

have been strengthened by graphene, metal oxides or carbon nanotubes, among other nanoparticles. The absorption capability of polymers is enhanced by the high surface area or reactivity of nanoparticles, offering an efficient way of eliminating heavy metal ions in wastewater [43-45]. Furthermore, because polymers are adjustable, it is possible to tailor their surface functioning and porosity in order to maximise the elimination of particular heavy metals. By providing enhanced selectivity or recyclability, polymer nanocomposites help solve issues related to conventional water treatment techniques, such as ion exchange and precipitation [46,47]. Moreover, their adaptability enables the creation of economical and long-lasting heavy elimination of metal ions solutions, in line with the expanding market for green technology [48]. Research endeavours in the past few years have concentrated on enhancing the performance while synthesis of polymer nanocomposites and investigating their practical applications [49-51]. This multidisciplinary strategy, which combines nanotechnology along with polymer science, has enormous potential to improve water treatment techniques and guarantee the effective and environmentally responsible elimination of ions of heavy metals from water sources that have been contaminated [52-54]. Furthermore, the benefits of polymer-nanostructures are such as regulated shape, size, design flexibility, and surface chemistry using multivalent agents, are making them suitable for applications in diverse fields such as targeting and bio-imaging drug administration [55-58]. This will make it easier to optimize drug pharmacokinetics and significantly improve the effectiveness of therapeutic treatment at the single particle or molecular assembly level [59-62].

### **3. Nanocomposites based on polymers**

Nanoparticles of various sizes and shapes are distributed throughout the polymer matrices, creating nanocomposites. The nanocomposites made from polymers can vary in size and form. Particulate sizes between 10 and 500 nm have indeed been reported for the majority of the fibrous, platelet-shaped polymer as well as spheroidal nanocomposites. These nanocomposites are subject to a multiphase system that calls for mixing, stabilizations, and compressions [63-66]. Extremely active and responsive these also displayed strong adhesion and adsorption properties [67]. Dimensional and film-forming versatility variations characterize polymer-associated nanocomposites as well. They have superior chemical, mechanical and physical properties, and they contain a variety of binding groups to make them effective for removing pollutants from the sewage disposal [63,64]. Utilizing polymeric materials is an effective method for improving polymers' functional and structural features. In

many cases, the characteristics of composites enhanced with nanoparticles exceed those of the polymer itself. The polymers as well as inorganic nanofillers work together to create polymer nanocomposites. Nanofillers, as defined by their large interfacial area to volume ratio, have dimensions of less over 100 nm [68]. Metals, carbon nanotubes, metal oxides, ceramics and silicates are the most common forms of nanofillers. Some of the characteristics of these filler particles are chemical, mechanical, thermal, electrical, etc. In this regard, manufacturing of components for different applications necessitates a basic knowledge and comprehension of nanostructures. Tuning different parameters as well as attempting to control the interconnection between nanostructured materials and polymers allows for the achievement of novel property combinations, which are the foundation of the physical and psychological characteristics of polymer nano – composites [69,70].

### *3.1. Polymer based nanocomposites in environmental remediation.*

The globe is concerned about the inorganic and organic toxins that are contaminating water supplies worldwide. Pollutants are typically readily mobilised in the environment due to their synthetic nature, high solubility in water, and lack of biodegradability [71]. Both ecosystems and human health are negatively impacted by their interactions with the environment and accumulation there. The ecosystem is becoming more and more degraded as a result of human activity, which releases harmful pollutants like pesticides, heavy metals, and toxic dyes into the atmosphere, endangering human health and polluting the environment [72]. Nanocomposites are widely used in many different disciplines, including soil improvement, flame retardancy, removing heavy metals from wastewater, purifying the air, and fertiliser delivery systems [73]. The composition of nanocomposite provides a vast surface area with unique characteristics. These days, nanocomposite structures are used for food packaging, water purification, soil fertiliser retention, and plant growth enhancement that leads to agricultural development. The characteristics of these nanocomposites depend on the combination of the polymer and nano-filler as well as the characteristics of their constituents.



### **Figure 1. Applications of Polymer based Nanocomposites**

Designed through the incorporation of nanoscale elements into polymer matrices, these sophisticated composites present a diverse strategy for tackling environmental issues. Polymeric nanocomposites have outstanding adsorption capabilities in the field of water cleanup, which enables them to effectively remove a variety of pollutants such as organic contaminants and heavy metal ions. Their specialised qualities, such as their large surface area and selective affinity, make it possible to target particular pollutants precisely. In addition to treating water, these nanocomposites are essential for soil remediation because they capture and immobilise pollutants, stopping their spread and reducing environmental damage [74]. Furthermore, by absorbing and neutralising airborne contaminants, polymeric nanocomposites in air purification systems improve the quality of the air. Their uses include environmentally friendly packaging materials, where the addition of nanoparticles improves barrier qualities and offers antibacterial capabilities. Polymeric nanocomposites are positioned to continue influencing environmental remediation tactics as continuous research opens up new avenues, providing effective and sustainable solutions to a range of environmental problems.

#### *3.2. Techniques for Manufacturing of Polymer Nanocomposites*

Most polymeric nanocomposites are produced by the solution approach, which necessitates requiring substantial amounts of organic solvents and has the potential to create environmental pollution. There has been a lot of focus on finding green synthetic alternatives that are also effective. One possible replacement for the standard technique is the use of supercritical carbon dioxide (scCO<sub>2</sub>). Throughout general, there are three approaches to produce inorganic filler/polymer nanocomposites (Figure 2). They include melt mixing and solution mixing, whereby the polymer with inorganic fillers is mixed together directly; (ii) the sol-gel technique, whereby a molecular preparation is reacted with water at room temperature to generate a metal oxide structure; and (iii) in-situ polymer of monomers with in context of fillers.

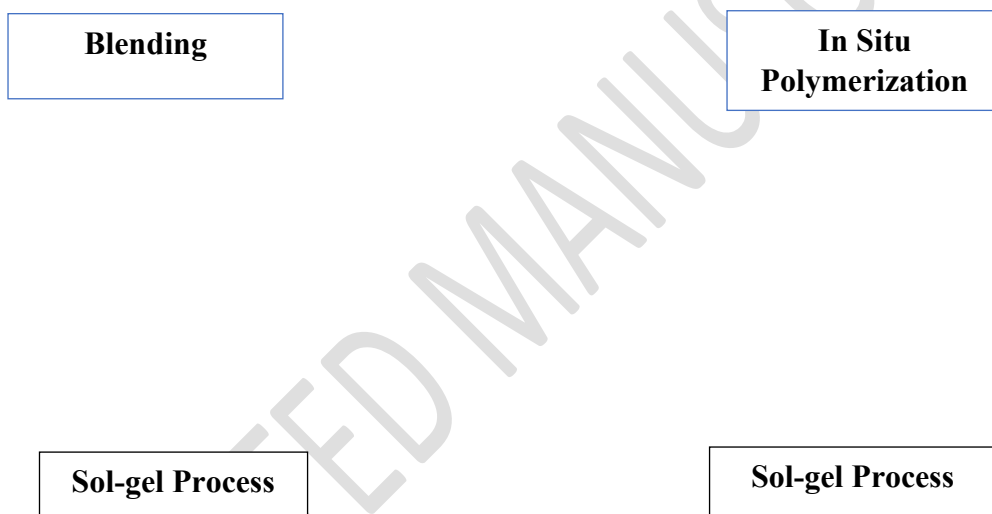


Figure 2. Methods for making nanocomposites out of polymers and inorganic fillers in supercritical carbon dioxide.

### *3.2.1. Solution Processing*

In this technique, several layered silicates are dissolved in a solvent that may dissolve the polymer. These silicate layers form a multi-layered, organised structure around the polymer as the solvent evaporates (Figure 3). Exfoliation is another name for this procedure.

### **Figure 3. Nanocomposites by employing by solution and melt processing**

#### *3.2.2. Melt processing*

Melt processing is the most sought-after method because of its low cost and adaptability to different formulas [22]. While the polymer is still liquid, it is combined with a layered silicate. Whereas if specified polymer is compatible with layer interfaces, the nanocomposite can be formed by inserting the polymer into the diffusion layer. In this instance, a solvent is unnecessary.

#### *3.2.3. In-situ polymerization*

In-situ polymerization involves bringing monomers as well as initiators to a site where clays will facilitate the polymerization process. Polymer-clay nanocomposites are formed when growing polymer chains disperse clays and invade interlayer space.

#### *3.2.4. Polymerization Processes*

Polymerization of colloidal sols comprising metal ions as well as monomers is used to generate nanomaterials in this technique. Particle size is affected by factors such as Ostwald ripening, heat coagulation and colloidal sol characteristics.

#### *3.2.4. Sol-gel technique*

Dissolution of the alkoxides of metals and subsequent polymerisation of the hydrolysis precursors are both part of this process. This process can be used to convert halides, organic metal alkoxides, esters, etc. into inorganic oxides of metallic nanoparticles. Alkyltrimethoxysilane-tetramethoxysilane combinations have indeed been co-hydrolysed and polycondensed to produce transparency films of inorganic/organic hybrid materials. Making organic/inorganic hybrids via the sol-gel technique with metal alkoxides is a viable option.

### *3.2.5. Mechanical stirring of nanoparticles and polymers*

Physical forces combining of a precursor solution with such a pre-synthesised, extremely dispersive nanomaterials mixture is technique Gamma-irradiation has been used to create polyacrylamide/cdS nanocomposites.

### *3.2.6. Carbon nanotubes nanocomposites*

Changes in characteristics have sparked strong interest in nanocomposites made from polymer with carbon nanotubes (CNTs). The dispersal of CNT through into matrix material is an issue during the fabrication of CNT-polymer nanocomposites. Alternatively, the nanocomposite can be made via in-situ synthesis in the vicinity of CNT or by producing thin films from CNT-suspended polymer solutions. Melting blending nanomaterials with polymers is another method for creating nanocomposite.

## **3.3. Adsorption Potential of Polymer Nanocomposites**

Due to the high productivity and relatively low operating expenses, adsorption is a method that is both desirable and realizable. Because of their remarkable performance in a variety of industrial operations [75], numerous types of biomasses have been used as adsorbents in a variety of different adsorption processes. On the converse hand, there is a widespread requirement around the world for the development of highly specific adsorbents that can remove hazardous metals and organic pollutants [76]. Polymer nanocomposite activated adsorbents have recently come to be regarded as possible components for the removal of various pollutants from effluents. This is due to the fact that these adsorbents possess robust mechanical properties, excellent hydraulics performance, good stability, as well as a surface chemistry that can be manipulated. In particular, the adsorption of the targeted contaminant is highly dependent upon the surface functionality, pore structure, encapsulating moieties, and physical and chemical structure of the adsorbents [77]. Nano adsorbents have a very high sorption efficiency and a very fast processing kinetics. This seems to be due to the vast surface area that they contain as well as the ease with which sorption sites can be accessed [78]. Both the design of materials and the dynamics of adsorption are the subject of extensive research [79]. In addition, the remarkable advantageous, in addition to its low cost and wide availability, are accountable for the outstanding attention that it has garnered to such an extended degree [80].

### *3.3.1. Nanocomposites of copolymer used as an adsorbent for the metal ions removal*

The industrial effluents from manufacturing processes, which contain metal ions, are either directly or discharged directly into water sources such as lakes, rivers, streams and lakes [81]. In most cases, heavy metals are incapable of being digested or biodegraded; as a result, they are persistent pollutants in the ecosystem. Nowadays, metal ion contamination in wastewater has become the primary ecological concern that poses a threat to human beings on a global scale [82]. This is due to the movement of pollutants in water bodies that are natural as well as the toxicity of the contaminants themselves. The removal of different metal ions from effluent can be accomplished by the utilization of a wide variety of techniques, comprising electrochemical, ion-exchange, membrane filtration, and adsorption techniques [83]. As a consequence of the low capital cost of a system, the simplicity of the approach, the simplicity of the functioning principles, as well as the lack of sensitivity to harmful contaminants, adsorption is the one that is utilized the most frequently amongst them [84]. In addition, the production of harmful chemicals is not a consequence of the adsorption process [85]. The metal ions adsorption is influenced by an array of factors, including pH of the solution, the amount of adsorbent used, the length of time the two substances are in contact with one another, the content of initially metal ions, or temperature [86].

In the past ten years, polymeric biosorbents have emerged as potential replacements for traditional adsorbents because of their huge surface area, surface characteristics that is amenable to modification, superior mechanical rigidity, pore size distribution, and feasible reinforcement under numerous reasons [87]. Conducting polymers are made up of molecules that are organic by their very make-up as well as their capacity to carry electricity and imitate the properties of metals thanks to the presence of electrons that act as charge transfer. Certain kinds of polymers might have a semi-conducting property. Polymer electrolytes constitute non-thermoplastic by their very character and belong to the category of organic materials [88]. Throughout conductive polymers do not conduct electricity. For the most part, trying to conduct organic polymers including such polythiophene, polyaniline and polypyrrole have been the subject of a great deal of research over the course of the past two decades [89]. This can be attributed to the outstanding conductivity of electricity that these materials exhibit in addition to their better environmental stabilisation. The potential application of these conducting polymer associated adsorbents and their composites for adsorbents for metallic

ions found in wastewater, such like manganese, iron, magnesium, cobalt, arsenic, nickel, etc., has sparked considerable interest [82,83].

As a result of the high number of amine or imine chemical bonding present in their respective polyaniline, polymer chains and its derivatives have demonstrated strong adsorption capabilities. As a consequence of this, they are utilized in the process of adsorption in order to remove wastewater that contains metal ions. Polyaniline as well as its derivatives have lately come to the attention of researchers who are looking into their potential use as effective nanoadsorbents for such removal of metal ions [79]. It has been determined that polyaniline particles are effective at removing mercury ions from water-based solutions [90]. Based on the results of the study, it was determined that the potential of polyaniline nanoparticles for the adsorbed of metallic ions was found to be 600 mg g<sup>-1</sup> [90]. Furthermore addition, a pH of around 5.5 was found to be optimal for the adsorption process of mercury ions upon that polymer matrix. This was possible due to the presence of nitrogen-containing functional groups here on polymer matrix, that are thought to be important for mercury sorption. Chromium ion is yet some other metal ion that is of importance. Because of the toxic and carcinogenic effects that chromium Cr(VI) has on people's health as well as the diverse range of applications that it has in sectors such as mining as well as electroplating [91], there has been a growing amount of focus on this research field.

Riahi Samani and colleagues conducted research on the removal of Cr(VI) ions in water solution using polyaniline nanoparticles [92]. These scientists found that the type of solvent that was used in the creation of polyaniline had a significant impact on the shape of the polyaniline, as well as its ability to remove Cr(VI) from a solution. In addition, the peak removal efficiency of Cr(VI) was achieved with the use of the generated polyaniline, which was greater than 90%. In light of the findings of these experiments, it was concluded that the elimination process of polyaniline that has been accountable for the aggregation of surface complexation. Samani and his team also released an investigation on the absorptive properties of polyaniline that was synthesized using an average amount of water and acetonitrile [93]. The powdered polyaniline that had been manufactured was put to use as an adsorption in order to get rid of the harmful chromium (VI) that was present in water solution. The pH of around 7 (a balanced environment) provided the most chances of getting rid of hexavalent chromium, whereas a pH of near about 3 (an acidic situation) provided the greatest possibility of getting rid of total chromium. The highest possible chromium adsorption rate for polyaniline reported determined to be 36.1 mg/g [93].

Despite the fact that polyaniline is useful for the process of adsorption, the material suffers from a number of significant drawbacks. These include its inability to be separated, its weak conductivity particularly compared to metals, its inefficient usage technology, its propensity to absorb water, and its fragile nature [94]. Polyaniline nanocomposites of varying types have indeed been produced with a variety of metal oxides, metals and various nanotubes, among other things, with intention of enhancing the characteristics of polyaniline. Polyaniline nanocomposites were shown to offer valuation qualities, both physically and physiochemically, in a research [88], which supported this finding. Organic and inorganic contaminants have both been absorbed by polyaniline composites, which have been used as an adsorption by researchers [95]. In addition, polypyrrole biosorbents play a significant part in the removal of metal ions because of the ease and high degree of flexibility with which they can be synthesized, as well as their biocompatibility, high conductivity, stability, good mechanical properties, as well as electrochemical stability [96]. In spite of the fact that the effectiveness of sorption process is largely determined by the conditions under which polypyrrole is prepared, there have been a few attempts made to get rid of metal ions by using polypyrrole conducting polymers. These polymers are created through the chemical polymerization of compounds pyrrole with in presence of a number of different oxidants under a variety of conditions [89,97,98]. At a pH of around 5, a significant amount of bovine albumin serum (BSA) was adsorbed on conducting polymers that included chloride adsorption. On the other hand, at a comparable pH, almost little lysozymes were adsorbed. In instance, a significant amount of lysozyme were adsorbed upon polypyrrole containing dodecyl sulfate/polypyrrole containing octadecyl sulfate adsorption at nearly a pH of 10; on the contrary hand, almost no bovine serum albumin were adsorbed through either of these two adsorbent types at that pH.

Polypyrrole's usage has expanded beyond the preliminary application of traditional polymeric materials as a consequence of its ease of use and convenience in replicating the adsorbent once at low cost. Additionally, polypyrrole's good electrical and thermal conductivity, environmentally friendly characteristics, and simplicity in amending into nano - composites have contributed to this development. Taking these characteristics into account, the fusing of nanoparticles in polypyrrole for such manufacturing of polypyrrole-associated nanocomposites has been currently receiving an enormous reaction as a helpful site for advantageously replicating strongly adsorbents to counteract ecological problems

[98]. This is due to the fact that the fusing of nanoparticles in polypyrrole again for manufacturing of polypyrrole-associated nanocomposites is currently receiving an enormous response. Lately, bifunctional nanocomposites made of magnetite as well as maghemite have been utilized for the removal of metal ions. This is primarily due to the stimulatory properties that these nanoparticles possess, such as a vast surface area, a high magnetization, and a massive number of active sites for the adsorbent of metals. In addition, because of their magnetic qualities, they have the capacity to be easily removed from aqueous solutions with the application of an appropriate magnetic field [99]. This ability is made possible by the fact that they are magnetic.

### *3.3.2. Adsorbent Properties of Polymer Nanocomposites for the Removal of Dye*

Because dyes can have hazardous effects on humans, animals, plants and aquatic organisms, their mobility and distribution in waterways has been the subject of a great deal of study over the last three decades. This research has been carried out in great detail. The water's overall quality will suffer if dyes are allowed to be discharged into the source of water. Textiles, dyes, cosmetics, paper, rubber, leather, plastics, foodstuff, as well as plastic enterprises can use massive amounts of dyes for the reason of providing colour to their products. Additionally, these industries imbibe substantial amounts of water, that also results in the generation of a huge considerable quantity of coloured wastewater [100]. It's indeed possible to categorize the colours found in wastewater according to their excessive oxygen consumption, variable pH, indestructibility, and dependence on a variety of oxidants. Many wastewaters discharged have proven out to be a problem for decolouration as well as demineralization [101]. This is due to the complicated structures of these industrial wastewaters as well as their strong battle to dilapidation. With in textile industry, almost twenty-five percent of the dyes is wasted during the dyeing techniques, and between 2 and 21% of the dye is lost to various ecological factors as a result of an useful method. Since dyes are so colourful, it can be challenging for aquatic life to receive the necessary amount of sunshine [102]. Because dyes have such a long half-life, its harmful effects have reached a point where they are becoming increasingly difficult to control. Dye residues remain in the environment for an extended time frame because there is no remediation method that can be considered acceptable. Due to the extraordinarily complex nature of their architecture and the chemical basis upon which they are built, dyes are notoriously difficult to eliminate [103]. In addition, because of the chemical composition of dyes, they are resistant to an extensive variety of oxidizing agents, chemicals, and heat, all of which are examples of substances that



are not physiologically degradable. As a consequence of this, decolorizing the wastewaters once soon as they're released through into aquatic system is not exactly a simple task. Reverse osmosis, Ion exchange, precipitation, reverse osmosis and adsorption are four of the most important technologies that can be used to remove harmful waste out wastewater. There are various different methods that can be used for this purpose. The adsorption method has become the most adaptable and widely used way for the dyes to be removed [104,105]. Among such procedures, it is the adsorption approach which is most widely utilized. In addition to the fact that they are non-toxic as well as biodegradable, naturally synthetic polymers as adsorbents have been gaining more interest as an option for the wastewater management process [106]. The accessibility and affordability of polymer nanocomposites like an adsorbent has stimulated their application for a wide range of purposes. One of these uses is the extraction of waste-water. In addition, the use of polymer nanocomposites since adsorbents has taken on a significant role in recent years. These nanocomposites have outstanding granulometric characteristics, a large surface area, increased active surface area, and are bioactive as well as thermally stable. This makes them an ideal candidate for this role. The chemical and physical properties of functionalized polymer nanocomposites, as well as the ease with which they can be separated and the variety of reactive groups that can be found on the backbone chain, have attracted a significant amount of research [107]. In addition, as a result of advancements in adsorbent synthesis as well as functionalization, a reliable forecasting has been made to guarantee that materials are organized in an improved state with a continued to improve presentation of the favoured characteristics of a highly competitive sorbent [108]. This has led to the successful completion of a number of research projects. Because these adsorbents have been functionalized in this way, they are now more receptive to interaction with big dye molecules. In addition to this, it allows for the nature of adsorption to be studied, as well as the subjecting of this behavior to a test performed in binary mixtures [109] and ternary dyes complexes [110]. It is necessary to improve the properties raw adsorbents before they can be used because these materials often have relatively poor adsorption capabilities [109,111]. The functionalization of adsorbent can be accomplished through a variety of approaches can be broken down into three primary categories: biological, chemical and physical alterations. The creation of a covalent link between the carbon -bond which is not saturate as well as other groups is an essential component of the process for the covalently derivatization of molecules. The non - covalent interactions functionalization approach is not as long-lasting or sturdy as the coordinate covalent crosslinking technique. Van der Waals interactions,  $\pi$ - $\pi$  interactions, while ionic interactions

are the primary ones that are responsible for noncovalent derivatization [112]. Nevertheless, adsorbent substances can be used for a variety of uses, including the removal of biological pollutants, dyes and metal ions.

#### **Figure 4. Adsorbent Materials Polymer Nanocomposites Functionalization.**

#### **4. Nanocomposite matrices based on chitosan**

With the advancement of nanotechnology, the chitosan may now be combined with various nanostructures, either incorporated into the solid matrix or coated on its surface, expanding its applications beyond its traditional role as a pure matrix biocompatible material. Purified biopolymers, like chitosan, can have issues in several key areas: thermal strength, mechanical strength, thermal stability, and barrier characteristics [113]. Like a filler spread throughout the entire matrices, and as a coating there at inorganic/organic material surface, in the nanometer level have indeed been introduced to chitosan to eliminate the majority of these structure disadvantages [114]. Nanotechnology, nanosheets, nanocapsules, nanorods, nanofibres and nanowires are just few of the many nanostructures that can be added to it and disseminated in chitosan for additives.

##### *4.1. Treatment of wastewater by Chitosan*

The safe and effective disposal of trash and wastewater is a major issue in every region. Many recent material advancements have highlighted the need of having ready access to clean water as well as effluents disposal. The multi-layered coatings to increase resistance to corrosion [115] have seen a rise in attention in chitosan as an entire standalone material

and also as composites [116,117]. Using chitosan allows for the selective adsorption and removal of many different metal ions, as detailed by Crini et al. [118] looked into the use of chitosan nano - composites in the heavy metal cleanup and shown promising results [119-121]. Chitosan nanocomposites have been employed to remove contaminants like heavy metal ions Cu(II) as well as Cr(VI) [122], Cr (VI) [123], Co (III) [124], and dyes [125-126] and iron [127]. Notwithstanding their carcinogenicity, toxicity and hazard to public health, organic dyes are frequently utilized in business. Nanocomposites made from chitosan have great potential as a material for the efficient and environmentally friendly disposal of waste (Rashid et al., 2018). There have been an increasing number of recent attempts to eliminate organic dyes by combining chitosan with various ceramic nanotechnology or nanoclays [128-129]. Asgari et al. (2020) investigated the feasibility of using chitosan nanomaterials for the elimination of antibiotics in sewage [130]. The combination of chitosan as well as magnetic Fe<sub>3</sub>O<sub>4</sub> nanocomposites has been studied for its ability to remove metronidazole off wastewater in medical and industrial settings. The ability of chitin to attach semiconductors and metals enables the development of photocatalyst nanocomposites [131]. The breakdown of organic contaminants [132] and dye removal efficiency via the Fenton methods can both benefit from the use of these novel nanomaterials [133]. The multipurpose chemical surface groups, high solubility in water, strong chemical reactivity, as well as a polymer with a flexibility all contribute to chitosan and its derivatives' impressive heavy metal ability of adsorption [134]. Properties of chitosan's polymeric chains, which includes several hydroxyl and amino units at the interface, were detailed by Gupta et al. (2012) [135]. Strong chelates bonding with metallic ions including Pb<sup>2+</sup>, Ni<sup>2+</sup>, Cu<sup>2+</sup>, Hg<sup>2+</sup> and Cd<sup>2+</sup> and Zn<sup>2+</sup> can be made using these chemical groups. According to a recent survey by Zhu et al. (2021) [136], the adsorption capability of chitosan is limited because of its small particular area of surface. Nanofibres made from chitosan have the potential to vastly improve upon the already impressive effectiveness of the material's individual attributes. Nonetheless, there is still room for development in areas like mechanical strength, stability, as well as reusability. New insights into nanocomposites utilizing chitosan as the substrate may help fill this knowledge gap. Even while chitosan has shown promise in the lab for removing metals from water, there are still challenges to overcome before it can be used on a larger scale to remove the toxic metals found in industrial effluent.

## **6. Metal Oxide Nanocomposites**

Metal oxide nanotechnology configurations range from nano range particles to tubes, wires and nano frameworks. During this study, we focused mostly on nanocomposites composed of meta/metal oxides loaded filler nanomaterials such as carbon nanofibers or nanotubes and polymers, among many other aspects. Metal oxide or metals nanomaterials such as iron oxide ( $\text{Fe}_2\text{O}_3$ ,  $\text{Fe}_3\text{O}_4$ ), manganese oxide ( $\text{MnO}_2$ ), zinc oxide ( $\text{ZnO}$ ), titanium dioxide ( $\text{TiO}_2$ ), silica ( $\text{SiO}_2$ ), magnesium oxide ( $\text{MgO}$ ), silver ( $\text{Ag}$ ), aluminum oxide ( $\text{Al}_2\text{O}_3$ ), tin ( $\text{Sn}$ ), and among others, have proven to be outstanding due to their related economic feasibility, chemical and biological stability, photocatalytic and non-photocorrosivity [137-138]. Size changes are expected to influence three major properties of every substance. The structural features, such as crystalline symmetry as well as cell size, come first. Oxide macroscopic particles exhibit stable and long-lasting systems with well-explainable crystallographic pictures. However, as cell size decreases, thermal sustainability can cause changes in cell characteristics or morphological inversions [139-141]. Second, the restriction and quantification of electrons inside a limited container improves nanocomposites electronic and optical conductivity properties [142-143]. Once the diameter of the oxide is decreased, the amplitude of the energy band changes (energy gap raises) by modifications in conductance and biochemical activity enabling material processes [144]. Nanoporous oxides have a larger surface area, allowing for effective adsorbents uptake of particulates and small nano-sized pollutants. Permeable structures enable a large number of accessible active sites, significantly shortening the dispersed ion transmission distance, and thus allowing for restricted ion flow. As a result, the productivity of nanoporous metallic nanoparticles in applications like energy storage can be significantly increased as compared to firm structured metal oxide.

### *6.1. Synthesis of Metal oxides nanomaterials*

The controlled production of metal oxide nanomaterials is the first stage in nanostructures and is crucial for successful implementations. The two most common methods for creating nanomaterials from gaseous, liquid and solid phases are "top-down" and "bottom-up" [145]. The first strategy involves decreasing the size of the subject matter to the nanoscale, as in erosion processes for example grinding. As shown in Fig (5) the bottom-up strategy promotes particle material synthesis from the bottom: atom via atom, molecule through molecule, or cluster through cluster in a gas state or solution form. The latter path is strongly favoured and is widely used in the creation of metal oxide nanoparticles. The controlled production of metal oxide nanomaterials is the first stage in nanotechnology and therefore is

essential for successful implementations. There are several known synthetic approaches for metal oxide Nanoparticles includes sol-gel [146], chemical precipitation [147], solvothermal procedure [148], microemulsion [149], surface functionalized methods [150], multiple-pulsed laser deposition [151] and chemical vapor deposition [152,153]. Among these approaches the methods such as hydrothermal, sol-gel, microemulsion synthesis, and chemical precipitation were shown to be the most versatile and straightforward.

## **Figure 5. Schematic synthesis pathway of top-down and bottom-up strategies**

### *6.1.1. Chemical precipitation method*

Due to the ease of application and effectiveness, it represents the simplest as well as a promising technique. This approach requires the presence of precipitation, coarsening of growth, and/or particle bundling. It is accomplished by adding a base to a metal salt solution within proper circumstances [147].


### *6.1.2. Hydrothermal method*

It is one of the successful methods for developing the crystalline of several various materials, as well as the particles generated in this system has higher crystalline nature. The reactions are carried out in an autoclave utilizing an aqueous medium, at pressures greater than 2000 psi with temperatures considerably beyond the boiling temperature of the in-usage solvent. Among the main disadvantages of the hydrothermal approach is the slow reaction rate at any specific temperature. Heating in microwave can be employed in conjunction with

hydrothermal process, and it has been discovered that the kinematics of crystallization improves with this approach [147]. This combination is known as microwave based hydrothermal biosynthesis.

### 6.1.3. Sol-gel method

The gentle reaction conditions and the ability to create nanomaterials from precursors, the sol-gel method has attracted attention as a viable technique for the production of nanomaterials [154]. The sol-gel process produces either film [141-142] or colloid granules [155]. Micro and nanostructures can be created using the sol-gel process. The reaction conditions have a significant impact on the size, shape, and texture of the finished product [156]. The procedure incorporates a basic wet chemical change based on condensation and hydrolysis that results in the development of sol, which then ages to form an integrated matrix as gel (Figure 13). The sol-gel approach is also particularly appealing for the creation of multi-component nanostructures, because the slow response kinetics enable efficient engineering structures of the final result. Additional advantage is the fact that reactions are carried out at moderate or ambient temp. Within sol-gel method, artificial substrates experience a series of chemical reactions, resulting in the development of a 3-dimensional molecule network. Among the most popular ways is the breakdown and condensing of metal alkoxides, which results in bigger metal oxide particles that polymerize to create the coating. The sol-gel method allows the coating of surfaces with complicated forms on the nanoscale to micrometer range, which is not possible with other regularly used covering procedures. Inorganic/organic crystals, colloidal particles, even fibers nanotubes have been used as substrates [146].

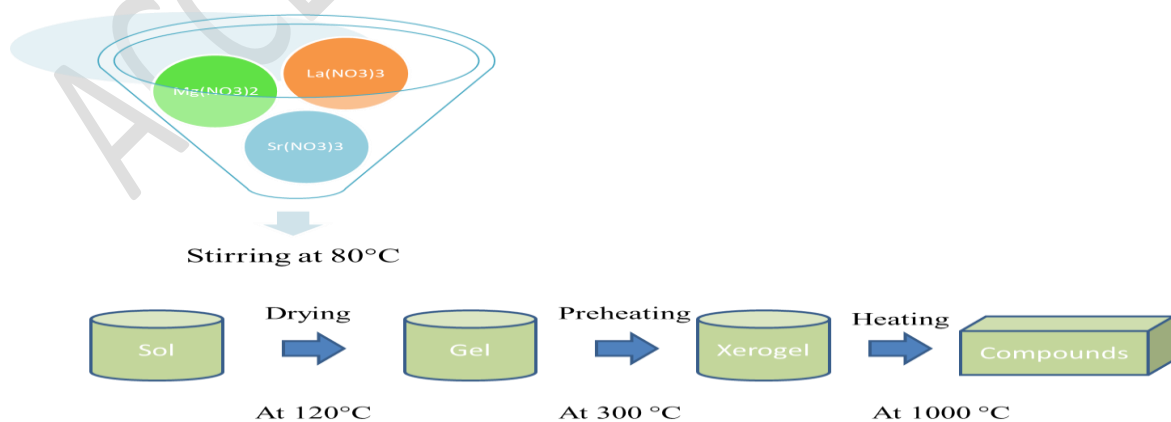

**Figure 3. The Sol-gel process is depicted schematically.**

#### *6.1.4. Microemulsion technique*

The W/O microemulsion method seems to be another way for creating metal oxide nanoparticles. It's a thermodynamically and isotopically solid Uniphase system composed of a combination of immiscible fluids with nanosized subdomains of distinct polarity-maintained surface-active chemicals interfacial film known as surfactant. Irrespective of metal composition, microcapsules allow for control of metallic particle size with a fine size distribution [157].

#### *6.1.5. Ceramic Methods*

The ceramic approach is the oldest method of producing rutile organized metal oxide [158]. Mechanical treatment is used to crush metal cations carbonates or oxides in the desired rutile phase. However, this technology has a problem because it is unable to generate fine particles, as well as the prolonged milling pulls out undesired environmental contamination, resulting in a broad range of particulate dimensions. The main difficulty encountered with this process is a lack of homogeneity in the synthesized material. Furthermore, the increased temperatures of 1200 K are required to complete the reaction and produce the resulting product of narrow size distribution via sintering.

#### *6.1.6. Combustion Synthesis*

Combustion biosynthesis is a series of heat energy-releasing (exothermic) events between a reagent as well as an oxidative connection and species conversion. The predominance of the organic compounds, such as hydrocarbons, exists in liquid, gas and solid forms. Combustion technique is a novel way for producing rutile organized particles by exploiting an exergonic oxidation and reduction reaction between metallic nitrate ions and oxalic hydrazine. Metallic nitrate ions are dissolved in a suitable quantity of water in a Pyrex dish in this technique, followed by boiling at 350 °C in an electric furnace. The thermal evaluation frequency of 75 °C min<sup>-1</sup> was chosen to create optimum conduction. This method can be utilized to create Ni-Zn as well as Co rutile structures [159].

### *6.2. Characteristics of metal/metal oxide*

To properly utilize and select metals and metal oxides, we must first understand their various physical and chemical properties. The chemical and physical properties of unique importance

in science are mostly related to the commercial use of metal oxides in ceramics, sensing, and water treatment [160].

### *6.2.1. Optical properties*

Reflectance, as well as absorbance optics, as well as absorbance optics, are required. The reflectance's dependent on dimensions that are in the frequency of the electromagnetic spectrum, and absorption characteristics establish the principal absorbance actions of solids. Excitation of electrons from conducting to valence band via discrete levels of energy causes semiconductor characteristics [161,162].

### *6.2.2. Transportation Properties*

The electronic/ionic conductivity of oxide compounds has been tentatively determined and is influenced by the nanoscale dimensions of the particles. According to Boltzmann's studies, the number of electrical ion carriers in a molecule contributes to the difference in energy between vibrational modes. Transmission is referred to as p-type doped whenever the bulk of the electric charge is n-type doping and holes when the electric charges carriers are electrons. For ion transport, four mechanisms are available: directly interstitial, vacancy, or growth. Ion deformity occurs in solids in an even distribution and alters the bulk material. Because of the constrained electrical potential reduction at the outermost layer of nano-sized chemicals, the existence of ions aids in the progression of the entire materials [163].

### *6.2.3. Mechanical Properties*

The main mechanic features are lower releasing stress or toughness and superplasticity at high temperatures. The mechanical property of the metal oxides is primarily concerned with examining sintering, superplastic, and conductivity properties. Specifically, a significant number of workings have shown significantly increased sinterability up to 600 K lesser temperatures than that of bulk [164-165].

### *6.2.4. Chemical Properties*

Transition metal oxides are used for oxidation-reduction reactions and acidic and basic properties. They are also utilized for absorbance and catalysis. Metal oxides have crucial properties such as synchronizing of outer atoms, oxidation, reduction properties, and oxide formation at the outermost surface. Metal oxides with only s or p-type systems in the outer orbital are generally feasible for acidic and basic catalysis [166-168].



## Conclusions

Nanocomposites have several applications and have advanced rapidly. Improved thermal, physical and other one-of-a-kind qualities can be engineered into nanocomposites. These can be manufactured utilizing straightforward and low-cost methods, and they exhibit better characteristics to common microscale composites. The composite substances have acquired new capabilities thanks to the incorporation of nanoparticles in minute quantities. Due to their significance in both academia and industry, polymer nanocomposites have garnered a lot of interest in recent years.

## References

1. Ariffin, N., Abdullah, M. M. A. B., Zainol, M. R. R. M. A., Murshed, M. F., Faris, M. A., & Bayuaji, R. (2017). Review on adsorption of heavy metal in wastewater by using geopolymer. In *MATEC Web of Conferences* (Vol. 97, p. 01023). EDP Sciences.
2. Roccaro, P., Sgroi, M., & Vagliasindi, F. G. (2013). Removal of xenobiotic compounds from wastewater for environment protection: treatment processes and costs. *Chemical Engineering Transactions*, 32.
3. Oves, M., Khan, M. S., Zaidi, A., & Ahmad, E. (2012). Soil contamination, nutritive value, and human health risk assessment of heavy metals: an overview. In *Toxicity of heavy metals to legumes and bioremediation* (pp. 1-27). Springer, Vienna.
4. Shanker, A. K., Cervantes, C., Loza-Tavera, H., & Avudainayagam, S. (2005). Chromium toxicity in plants. *Environment international*, 31(5), 739-753.
5. Quantin, C., Ettlér, V., Garnier, J., & Šebek, O. (2008). Sources and extractibility of chromium and nickel in soil profiles developed on Czech serpentinites. *Comptes Rendus Geoscience*, 340(12), 872-882.
6. Tiwari AK, Pal SL, Srivastava N, Shah M, Ahmad I, Alshahrani MY, Pal DB. Bioadsorbent and adsorbent-based heavy metal removal technologies from wastewater: new insight. *Biomass Conversion and Biorefinery*. 2023 Oct;13(15):13335-56.
7. Sonone SS, Jadhav S, Sankhla MS, Kumar R. Water contamination by heavy metals and their toxic effect on aquaculture and human health through food Chain. *Lett. Appl. NanoBioScience*. 2020;10(2):2148-66.

8. Balali-Mood M, Naseri K, Tahergorabi Z, Khazdair MR, Sadeghi M. Toxic mechanisms of five heavy metals: mercury, lead, chromium, cadmium, and arsenic. *Frontiers in pharmacology*. 2021:227.
9. Rehman K, Fatima F, Waheed I, Akash MS. Prevalence of exposure of heavy metals and their impact on health consequences. *Journal of cellular biochemistry*. 2018 Jan;119(1):157-84.
10. Ali H, Khan E, Ilahi I. Environmental chemistry and ecotoxicology of hazardous heavy metals: environmental persistence, toxicity, and bioaccumulation. *Journal of chemistry*. 2019 Mar 5;2019.
11. Kumar A, Ali M, Kumar R, Kumar M, Sagar P, Pandey RK, Akhouri V, Kumar V, Anand G, Niraj PK, Rani R. Arsenic exposure in Indo Gangetic plains of Bihar causing increased cancer risk. *Scientific Reports*. 2021 Jan 27;11(1):2376.
12. Rahaman MS, Rahman MM, Mise N, Sikder MT, Ichihara G, Uddin MK, Kurasaki M, Ichihara S. Environmental arsenic exposure and its contribution to human diseases, toxicity mechanism and management. *Environmental Pollution*. 2021 Nov 15;289:117940.
13. Uddin MM, Zakeel MC, Zavahir JS, Marikar FM, Jahan I. Heavy metal accumulation in rice and aquatic plants used as human food: A general review. *Toxics*. 2021 Dec 20;9(12):360.
14. Srinivas R, Singh AP, Sharma R. A scenario based impact assessment of trace metals on ecosystem of river Ganges using multivariate analysis coupled with fuzzy decision-making approach. *Water Resources Management*. 2017 Oct;31:4165-85.
15. Lilli, M. A., Moraetis, D., Nikolaidis, N. P., Karatzas, G. P., & Kalogerakis, N. (2015). Characterization and mobility of geogenic chromium in soils and river bed sediments of Asopos basin. *Journal of hazardous materials*, 281, 12-19.
16. Burakov, A. E., Galunin, E. V., Burakova, I. V., Kucherova, A. E., Agarwal, S., Tkachev, A. G., & Gupta, V. K. (2018). Adsorption of heavy metals on conventional and nanostructured materials for wastewater treatment purposes: A review. *Ecotoxicology and environmental safety*, 148, 702-712.

17. Akpor, O. B., Ohiobor, G. O., & Olaolu, D. T. (2014). Heavy metal pollutants in wastewater effluents: sources, effects and remediation. *Advances in Bioscience and Bioengineering*, 2(4), 37-43.
18. Su, S., Xiao, R., Mi, X., Xu, X., Zhang, Z., & Wu, J. (2013). Spatial determinants of hazardous chemicals in surface water of Qiantang River, China. *Ecological indicators*, 24, 375-381.
19. Srebotnjak, T., Carr, G., de Sherbinin, A., & Rickwood, C. (2012). A global Water Quality Index and hot-deck imputation of missing data. *Ecological Indicators*, 17, 108-119.
20. Islam, M. S., Han, S., Ahmed, M. K., & Masunaga, S. (2014). Assessment of trace metal contamination in water and sediment of some rivers in Bangladesh. *Journal of Water and Environment Technology*, 12(2), 109-121.
21. Singh, A., & Prasad, S. M. (2015). Remediation of heavy metal contaminated ecosystem: an overview on technology advancement. *International Journal of Environmental Science and Technology*, 12(1), 353-366.
22. Nazemi, S. (2012). Concentration of heavy metal in edible vegetables widely consumed in Shahroud, the North East of Iran. *Journal of Applied Environmental and Biological Science*, 2(8), 386-391.
23. Veschasit, O., Meksumpun, S., & Meksumpun, C. (2012). Heavy metals contamination in water and aquatic plants in the Tha Chin River, Thailand. *Agriculture and Natural Resources*, 46(6), 931-934.
24. Hutton, G., Haller, L., Water, S., & World Health Organization. (2004). Evaluation of the costs and benefits of water and sanitation improvements at the global level (No. WHO/SDE/WSH/04.04). World Health Organization.
25. Sunil, K., Karunakaran, G., Yadav, S., Padaki, M., Zadorozhnyy, V., & Pai, R. K. (2018). Al-Ti<sub>2</sub>O<sub>6</sub> a mixed metal oxide based composite membrane: A unique membrane for removal of heavy metals. *Chemical Engineering Journal*, 348, 678-684.
26. A. Demirbas, *J. Hazard. Mater.* 2008, 157, 220.
27. R. Singh, S. Singh, P. Parihar, V. P. Singh, S. M. Prasad, *Ecotoxicol. Environ. Saf.* 2015, 112, 247.
28. C. Sanfeliu, J. Sebastià, R. Cristàfol, E. Rodríguez-Farré, *Neurotoxicity Research* 2003, 5, 283.
29. M. K. Aroua, F. M. Zuki, N. M. Sulaiman, *J. Hazard. Mater.* 2007, 147, 752.

30. M. Bhaumik, A. Maity, V. v. Srinivasu, M. S. Onyango, Chem. Eng. J. 2012, 181–182, 323.
31. T. S. Nawrot, J. A. Staessen, H. A. Roels, E. Munters, A. Cuypers, T. Richart, A. Ruttens, K. Smeets, H. Clijsters, J. Vangronsveld, BioMetals 2010, 23, 769.
32. Saleh TA, Mustaqeem M, Khaled M. Water treatment technologies in removing heavy metal ions from wastewater: A review. Environmental Nanotechnology, Monitoring & Management. 2022 May 1;17:100617.
33. Li M, Shi Q, Song N, Xiao Y, Wang L, Chen Z, James TD. Current trends in the detection and removal of heavy metal ions using functional materials. Chemical Society Reviews. 2023.
34. Dutta S, Sharma RK. Sustainable magnetically retrievable nanoadsorbents for selective removal of heavy metal ions from different charged wastewaters. InSeparation Science and Technology 2019 Jan 1 (Vol. 11, pp. 371-416). Academic Press.
35. Iqbal A, Cevik E, Mustafa A, Qahtan TF, Zeeshan M, Bozkurt A. Emerging developments in polymeric nanocomposite membrane-based filtration for water purification: A concise overview of toxic metal removal. Chemical Engineering Journal. 2024 Jan 14:148760.
36. Noah NM. Current status and advancement of nanomaterials within polymeric membranes for water purification. ACS Applied Nano Materials. 2023 Nov 15.
37. Dhass AD, Beemkumar N, Venkadeshwaran K, Aravindan MK. An Impact of Nanotechnology for Water Treatment Process. InNanomaterials and Nanoliquids: Applications in Energy and Environment 2023 Nov 16 (pp. 31-45). Singapore: Springer Nature Singapore.
38. Dey S, Manna K, Pradhan P, Sarkar AN, Roy A, Pal S. Review of Polymeric Nanocomposites for Photocatalytic Wastewater Treatment. ACS Applied Nano Materials. 2024 Feb 21.
39. Khoo PS, Ilyas RA, Uda MN, Hassan SA, Nordin AH, Norfarhana AS, Ab Hamid NH, Rani MS, Abral H, Norrahim MN, Knight VF. Starch-based polymer materials as advanced adsorbents for sustainable water treatment: Current status, challenges, and future perspectives. Polymers. 2023 Jul 21;15(14):3114.
40. Khodakarami M, Bagheri M. Recent advances in synthesis and application of polymer nanocomposites for water and wastewater treatment. Journal of Cleaner Production. 2021 May 10;296:126404.

41. Al Harby NF, El-Batouti M, Elewa MM. Prospects of Polymeric Nanocomposite Membranes for Water Purification and Scalability and their Health and Environmental Impacts: A Review. *Nanomaterials*. 2022 Oct 17;12(20):3637.
42. Zhao X, Lv L, Pan B, Zhang W, Zhang S, Zhang Q. Polymer-supported nanocomposites for environmental application: a review. *Chemical engineering journal*. 2011 Jun 1;170(2-3):381-94.
43. Arunachalam P. Polymer-based nanocomposites for energy and environmental applications. In *Polymer-based nanocomposites for energy and environmental applications* 2018 Jan 1 (pp. 185-203). Woodhead Publishing.
44. Chaurasia A, Mulik RS, Parashar A. Polymer-based nanocomposites for impact loading: A review. *Mechanics of Advanced Materials and Structures*. 2022 Jul 14;29(18):2581-606.
45. Moghaddam FD, Heidari G, Zare EN, Djatoubai E, Paiva-Santos AC, Bertani FR, Wu A. Carbohydrate polymer-based nanocomposites for breast cancer treatment. *Carbohydrate Polymers*. 2023 Mar 15;304:120510.
46. Bao Z, Hou C, Shen Z, Sun H, Zhang G, Luo Z, Dai Z, Wang C, Chen X, Li L, Yin Y. Negatively charged nanosheets significantly enhance the energy-storage capability of polymer-based nanocomposites. *Advanced Materials*. 2020 Jun;32(25):1907227.
47. Behera R, Elanseralathan K. A review on polyvinylidene fluoride polymer based nanocomposites for energy storage applications. *Journal of Energy Storage*. 2022 Apr 1;48:103788.
48. Alsharabasy AM, Pandit A, Farràs P. Recent advances in the design and sensing applications of hemin/coordination polymer-based nanocomposites. *Advanced Materials*. 2021 Jan;33(2):2003883.
49. Fattahi M, Hsu CY, Ali AO, Mahmoud ZH, Dang NP, Kianfar E. Severe plastic deformation: Nanostructured materials, metal-based and polymer-based nanocomposites: A review. *Heliyon*. 2023 Nov 23.
50. Gobi R, Ravichandiran P, Babu RS, Yoo DJ. Biopolymer and synthetic polymer-based nanocomposites in wound dressing applications: a review. *Polymers*. 2021 Jun 13;13(12):1962.
51. Salimian S, Zadhoush A, Naeimirad M, Kotek R, Ramakrishna S. A review on aerogel: 3D nanoporous structured fillers in polymer-based nanocomposites. *Polymer Composites*. 2018 Oct;39(10):3383-408.

52. Surmenev RA, Orlova T, Chernozem RV, Ivanova AA, Bartasyte A, Mathur S, Surmeneva MA. Hybrid lead-free polymer-based nanocomposites with improved piezoelectric response for biomedical energy-harvesting applications: A review. *Nano Energy*. 2019 Aug 1;62:475-506.
53. Kaur G, Kaur A, Kaur H. Review on nanomaterials/conducting polymer based nanocomposites for the development of biosensors and electrochemical sensors. *Polymer-Plastics Technology and Materials*. 2021 Mar 24;60(5):504-21.
54. Abbasi H, Antunes M, Velasco JI. Recent advances in carbon-based polymer nanocomposites for electromagnetic interference shielding. *Progress in Materials Science*. 2019 Jun 1;103:319-73.
55. Jiang S, Jin L, Hou H, Zhang L. Polymer-based nanocomposites with high dielectric permittivity. In *Polymer-based multifunctional nanocomposites and their applications* 2019 Jan 1 (pp. 201-243). Elsevier.
56. R. Karthik, S. Meenakshi, *Int. J. Biol. Macromol.* 2015, 78, 157.
57. M. R. Awual, M. Ismael, M. A. Khaleque, Y. Tsuyoshi, *Ultra-Trace Copper (II) Detection and Removal from Wastewater Using Novel MesoAdsorbent*, Elsevier 2014.
58. G. Qiu, Q. Xie, H. Liu, T. Chen, J. Xie, H. Li, *Appl. Clay Sci.* 2015, 118, 107.
59. A. Shahat, M. Awual, M. Naushad, *Functional Ligand Anchored Nanomaterial Based Facial Adsorbent for Cobalt (II) Detection and Removal from Water Samples*, Elsevier 2015. [15] S. Rengaraj, S. H. Moon, *Water Res.* 2002, 36, 1783.
60. G. Z. Kyzas, M. Kostoglou, *Sep. Purif. Technol.* 2015, 149, 92.
61. M. I. Kandah, J. L. Meunier, *J. Hazard. Mater.* 2007, 146, 283.
62. M. M. Lakouraj, F. Mojerlou, E. N. Zare. *Nanogel and Superparamagnetic Nanocomposite Based on Sodium Alginate for Sorption of Heavy Metal Ions*, Elsevier 2014.
63. Tseng, H.; Kumar, I.A.; Weng, T.; Lu, C.; Wey, M. Preparation and characterization of carbon molecular sieve membranes for gas separation-the effect of incorporated multi-wall carbon nanotubes. *Desalination* 2009, 240, 40–45.
64. Sanip, S.M.; Ismail, A.F.; Goh, P.S.; Soga, T.; Tanemura, M.; Yasuhiko, H. Gas separation properties of functionalized carbon nanotubes mixed matrix membranes. *Sep. Purif. Technol.* 2011, 78, 208–213.

65. Sun, H.; Wang, T.; Xu, Y.; Gao, W.; Li, P.; Niu, Q.J. Fabrication of polyimide and functionalized multi-walled carbon nanotubes mixed matrix membranes by in-situ polymerization for CO<sub>2</sub> separation. *Sep. Purif. Technol.* 2017, 177, 327–336.
66. Baker, R.W.; Lokhandwala, K. Natural gas processing with membranes: An overview. *Ind. Eng. Chem. Res.* 2008, 47, 2109–2121.
67. Fu, Y.-J.; Hu, C.-C.; Lin, D.-W.; Tsai, H.-A.; Huang, S.-H.; Hung, W.-S.; Lee, K.-R.; Lai, J.-Y. Adjustable microstructure carbon molecular sieve membranes derived from thermally stable polyetherimide/polyimide blends for gas separation. *Carbon* 2017, 113, 10–17.
68. Jiao, W.; Ban, Y.; Shi, Z.; Jiang, X.; Li, Y.; Yang, W. Gas separation performance of supported carbon molecular sieve membranes based on soluble polybenzimidazole. *J. Membr. Sci.* 2017, 533, 1–10.
69. Giorno, L.; Drioli, E.; Strathmann, H. The principle of gas separation. In *Encyclopedia of Membranes*; Drioli, E., Giorno, L., Eds.; Springer: Cham, Switzerland, 2015.
70. Kononova, S.V.; Gubanova, G.N.; Korytkova, E.N.; Sapegin, D.A.; Setnickova, K.; Petrychkovych, R.; Uchytel, P. Polymer Nanocomposite Membranes. *Appl. Sci.* 2018, 8, 1181.
71. Nouri A, Chua SF, Mahmoudi E, Sakti SC, Ang WL. Polymer-based Nanocomposites for Environmental Remediation. In *Functional Hybrid Nanomaterials for Environmental Remediation 2021 Sep 24* (pp. 101-132).
72. Tajik S, Beitollahi H, Nejad FG, Dourandish Z, Khalilzadeh MA, Jang HW, Venditti RA, Varma RS, Shokouhimehr M. Recent developments in polymer nanocomposite-based electrochemical sensors for detecting environmental pollutants. *Industrial & engineering chemistry research.* 2021 Jan 15;60(3):1112-36.
73. Zhao X, Lv L, Pan B, Zhang W, Zhang S, Zhang Q. Polymer-supported nanocomposites for environmental application: a review. *Chemical engineering journal.* 2011 Jun 1;170(2-3):381-94.
74. Khan MI, Almesfer MK, Elkhaleefa A, Shigidi I, Shamim MZ, Ali IH, Rehan M. Conductive polymers and their nanocomposites as adsorbents in environmental applications. *Polymers.* 2021 Nov 4;13(21):3810.
75. Agboola, O.; Okoli, B.; Sanni, S.E.; Alaba, P.A.; Popoola, P.; Sadiku, E.R.; Mubiayi, P.M.; Akinlabi, E.T.; Makhatha, M.E. Synthesis of activated carbon from olive seeds:

- Investigating the yield, energy efficiency, and dye removal capacity. *SN Appl. Sci.* 2019, 1, 1–10.
76. Msaadi, R.; Yilmaz, G.; Allushi, A.; Hamadi, S.; Ammar, S.; Chehimi, M.M.; Yagci, Y. Highly selective copper ion imprinted clay/polymer nanocomposites prepared by visible light initiated radical photo polymerization. *Polymer* 2019, 11, 286.
77. Pan, B.; Zhang, X.; Jiang, Z.; Li, Z.; Zhang, Q.; Chen, J. Polymer and polymer-based nanocomposite adsorbents for water treatment. In *Polymeric Materials for Clean Water*; Das, R., Ed.; Springer: Cham, Switzerland, 2018.
78. Bhaumik, M.; Setshedi, K.; Maity, A.; Onyango, M.S. Chromium (VI) removal from water using fixed bed column of polypyrrole/Fe<sub>3</sub>O<sub>4</sub> nanocomposite. *Sep. Purif. Technol.* 2013, 110, 11–19.
79. Zhu, J.; Wei, S.; Chen, M.; Gu, H.; Rapole, S.B.; Pallavkar, S.; Ho, T.C.; Hopper, H.; Guo, Z. Magnetic nanocomposites for environmental remediation. *Adv. Powder Technol.* 2013, 24, 459–467.
80. Kotal, M.; Bhowmick, A.K. Polymer nanocomposites from modified clays: Recent advances and challenges. *Prog. Polym. Sci.* 2015, 51, 127–187.
81. Fu, F.; Wang, Q. Removal of heavy metal ions from wastewaters: A review. *J. Environ. Manage.* 2011, 92, 407–418.
82. Zare, E.N.; Motahari, A.; Sillanpää, M. Nanoadsorbents based on conducting polymer nanocomposites with main focus on polyaniline and its derivatives for removal of heavy metal ions/dyes: A review. *Environ. Res.* 2018, 162, 173–195.
83. Bernardo, G.R.; Rene, R.M.; Ma Catalina, A.D. Chromium (III) uptake by agro-waste biosorbents: Chemical characterization, sorption-desorption studies, and mechanism. *J. Hazard Mater.* 2009, 170, 845–854.
84. Javadian, H. Application of kinetic, isotherm and thermodynamic models for adsorption of Co (II) ions on polyaniline/polypyrrole copolymer nanofibers from aqueous solution. *J. Ind. Eng. Chem.* 2014, 20, 4233–4241.
85. Hua, M.; Zhang, S.; Pan, B.; Zhang, W.; Lv, L.; Zhang, Q. Heavy metal removal from water/wastewater by nanosized metal oxides: A review. *J. Hazard Mater.* 2012, 211, 317–331.
86. Zare, E.N.; Lakouraj, M.M.; Ramezani, A. Effective adsorption of heavy metal cations by superparamagnetic poly(aniline-co-m-phenylenediamine)@Fe<sub>3</sub>O<sub>4</sub> nanocomposite. *Adv. Polym. Technol.* 2015, 34, 1–11.



87. Mahmoodi, N.M.; Najafi, F.; Neshat, A. Poly (amidoamine-co-acrylic acid) copolymer: Synthesis, characterization and dye removal ability. *Ind. Crops Prod.* 2013, 42, 119–125.
88. Shahabuddin, S. Polyaniline Based Nanocomposites as Adsorbents and Photocatalysts in the Removal of Organic Dyes. Ph.D. Thesis, University of Malaya, Kuala Lumpur, Malaysia, 2016.
89. Ansari, R. Polypyrrole conducting electroactive polymers: Synthesis and stability studies. *E J. Chem.* 2006, 3, 186–201.
90. Wang, J.; Deng, B.; Chen, H. Removal of aqueous Hg (II) by polyaniline: Sorption characteristics and mechanisms. *Environ. Sci.* 2009, 43, 5223–5228.
91. Wang, J.; Zhao, L.; Duan, W.; Han, L.; Chen, Y. Adsorption of aqueous Cr(VI) by novel fibrous adsorbent with amino and quaternary ammonium groups. *Ind. Eng. Chem. Res.* 2012, 51, 13655–13662.
92. Riahi Samani, M.; Borghei, S.M.; Olad, A.; Chaichi, M.J. Influence of polyaniline synthesis conditions on its capability for removal and recovery of chromium from aqueous solution. *Iranian J. Chem. Chem. Eng.* 2011, 30, 97–100.
93. Samani, M.R.; Borghei, S.M. Removal of chromium from aqueous solution using synthesized polyaniline in acetonitrile. *Int. J. Mater. Metal. Eng.* **2012**, 8, 741–744.
94. Nezakati T, Seifalian A, Tan A, Seifalian AM. Conductive polymers: opportunities and challenges in biomedical applications. *Chemical reviews.* 2018 Jul 3;118(14):6766-843.
95. Ayad, M.; El-Hefnawy, G.; Zaghlol, S. Facile synthesis of polyaniline nanoparticles; its adsorption behavior. *Chem. Eng. J.* **2013**, 217, 460–465.
96. Mahmud, H.N.M.E.; Huq, A.K.O.; Yahya, R. Polymer-based adsorbent for heavy metals removal from aqueous solution. *IOP Conf. Series: Mater. Sci. Eng.* **2016**, 206, 012100.
97. Kudoh, Y. Properties of polypyrrole prepared by chemical polymerization using aqueous solution containing  $\text{Fe}_2(\text{SO}_4)_3$  and anionic surfactant. *Synth. Met.* **1996**, 79, 17–22.
98. Deng, S.; Bai, R. Removal of trivalent and hexavalent chromium with aminated polyacrylonitrile fibers: Performance and mechanisms. *Water Res.* **2004**, 38, 2424–2431.
99. Olatunji, M.A.; Khandaker, M.U.; Ladan, M.; Bradley, D.A. Polypyrrole-based nanocomposite adsorbents and its application in removal of radioactive materials.

In *Polymer-Based Nanocomposites for Energy and Environmental Applications*; Woodhead Publishing: Cambridge, UK, 2018; pp. 465–489.

100. Chávez-Guajardo, A.E.; Medina-Llamas, J.C.; Maqueira, L.; Andrade, C.A.S.; Alves, K.G.B.; de Melo, C.P. Efficient removal of Cr (VI) and Cu (II) ions from aqueous media by use of polypyrrole/maghemite and polyaniline/maghemite magnetic nanocomposites. *Chem. Eng. J.* **2015**, *281*, 826–836.
101. Vijayakumar, G.; Tamilarasan, R.; Dharmendirakumar, M. Adsorption, kinetic, equilibrium and thermodynamic studies on the removal of basic dye Rhodamine-B from aqueous solution by the use of natural adsorbent perlite. *J. Mater. Environ. Sci.* **2012**, *3*, 157–170.
102. Saad, M.; Tahir, H. Synthesis of carbon loaded  $\gamma$ -Fe<sub>2</sub>O<sub>3</sub> nanocomposite and their applicability for the selective removal of binary mixture of dyes by ultrasonic adsorption based on response surface methodology. *Ultrason. Sonochem.* **2017**, *36*, 393–408.
103. Kahlon, S.K.; Sharma, G.; Julka, J.M.; Kumar, A.; Sharma, S.; Stadler, F.J. Impact of heavy metals and nanoparticles on aquatic biota. *Environ. Chem. Lett.* **2018**, *16*, 919–946.
104. Achmad, A.; Kassim, J.; Suan, T.K.; Amat, R.C.; Seey, T.L. Equilibrium, kinetic and thermodynamic studies on the adsorption of direct dye onto a novel green adsorbent developed from *Uncaria Gambir* extract. *J. Phys. Sci.* **2012**, *23*, 1–13.
105. Chagas, N.V.; Meira, J.S.; Anaissi, F.J.; Melquiades, F.L.; Quinária, S.P.; Felsner, M.L.; Justi, K.C. Preparation, characterization of bentonite clay/activated charcoal composites and 2<sup>3</sup> factorial design application in adsorption studies of methylene blue dye. *Rev Virtual Quim.* **2013**, *6*, 1607–1623.
106. Chang, M.Y.; Juang, R.S. Adsorption of tannic acid, humic acid, and dyes from water using the composite of chitosan and activated clay. *J. Colloid Interface Sci.* **2004**, *278*, 18–25.
107. Tanasa, E.; Zaharia, C.; Radu, I.C.; Surdu, V.A.; Vasile, B.S.; Damian, C.-M.; Andronescu, E. Novel Nanocomposites Based on Functionalized Magnetic Nanoparticles and Polyacrylamide: Preparation and Complex Characterization. *Nanomaterials* **2019**, *9*, 1384.
108. Mudhoo, A.; Gautam, R.K.; Ncibi, M.C.; Zhao, F.; Garg, V.K.; Sillanpää, M. Green synthesis, activation and functionalization of adsorbents for dye sequestration. *Environ. Chem. Lett.* **2019**, *17*, 157–193.

109. Maleki, A.; Hamesadeghi, U.; Daraei, H.; Hayati, B.; Najaf, F.; McKay, G.; Rezaee, R. Amine functionalized multi-walled carbon nanotubes: Single and binary systems for high capacity dye removal. *Chem. Eng. J.* **2017**, *313*, 826–835.
110. Debnath, S.; Ballav, N.; Maity, A.; Pillay, K. Competitive adsorption of ternary dye mixture using pine cone powder modified with  $\beta$ -cyclodextrin. *J. Mol. Liq.* **2017**, *225*, 679–688.
111. Sojoudi, M.; Shariati, S.; Khabazipour, M. Amine functionalized Kit-6 mesoporous magnetite nanocomposite as an efficient adsorbent for removal of Ponceau 4R dye from aqueous solutions. *Anal. Bioanal. Chem. Res.* **2016**, *3*, 287–298.
112. Lau, Y.J.; Khan, F.S.M.; Mubarak, N.M.; Lau, S.Y.; Chua, H.B.; Khalid, M.; Abdullah, E.C. Functionalized carbon nanomaterials for wastewater treatment. In *Industrial Applications of Nanomaterials; Micro and Nanotechnology*; Elsevier: Amsterdam, The Netherlands, 2019; pp. 283–311.
113. Bakshi, P. S., Selvakumar, D., Kadirvelu, K., & Kumar, N. S. (2020). Chitosan as an environment friendly biomaterial – A review on recent modifications and applications. *International Journal of Biological Macromolecules*, *150*, 1072–1083.
114. Kankala, R. K., Liu, C. G., Yang, D. Y., Wang, S. B., & Chen, A. Z. (2020). Ultrasmall platinum nanoparticles enable deep tumor penetration and synergistic therapeutic abilities through free radical species-assisted catalysis to combat cancer multidrug resistance. *Chemical Engineering Journal*, *383*(August 2019), Article 123138.
115. Nasrollahzadeh, M., Sajjadi, M., Irvani, S., & Varma, R. S. (2021). Starch, cellulose, pectin, gum, alginate, chitin and chitosan derived (nano)materials for sustainable water treatment: A review. *Carbohydrate Polymers*, *251*(May 2020), Article 116986.
116. Mohammadzadeh Pakdel, P., & Peighambaroust, S. J. (2018). Review on recent progress in chitosan-based hydrogels for wastewater treatment application. *Carbohydrate Polymers*, *201*, 264–279.
117. Thirugnanasambandham, K., Sivakumar, V., & Prakash Maran, J. (2013). Application of chitosan as an adsorbent to treat rice mill wastewater—Mechanism, modelling and optimization. *Carbohydrate Polymers*, *97*(2), 451–457.

118. Crini, G., Morin-Crini, N., Fatin-Rouge, N., D'eon, S., & Fievet, P. (2017). Metal removal from aqueous media by polymer-assisted ultrafiltration with chitosan. *Arabian Journal of Chemistry*, 10, S3826–S3839.
119. Al-Sherbini, A.-S. A., Ghannam, H. E. A., El-Ghanam, G. M. A., El-Ella, A. A., & Youssef, A. M. (2019). Utilization of chitosan/Ag bionanocomposites as eco-friendly photocatalytic reactor for bactericidal effect and heavy metals removal. *Heliyon*, 5 (6), Article e01980.
120. Cheraghipour, E., & Pakshir, M. (2020). Process optimization and modeling of Pb(II) ions adsorption on chitosan-conjugated magnetite nano-biocomposite using response surface methodology. *Chemosphere*, 260, Article 127560.
121. Kenawy, I. M. M., Eldefrawy, M. M., Eltabey, R. M., & Zaki, E. G. (2019). Melamine grafted chitosan-montmorillonite nanocomposite for ferric ions adsorption: Central composite design optimization study. *Journal of Cleaner Production*, 241.
122. Anush, S., Chandan, H. R., Gayathri, B., Asma, M. N., Vishalaksi, B., & Kalluraya, B. (2020). Graphene oxide functionalized chitosan-magnetite nanocomposite for removal of Cu(II) and Cr(VI) from waste water. *International Journal of Biological Macromolecules*, 164, 4391–4402.
123. Reis, E. D. S., Gorza, F. D. S., Pedro, G. D. C., MacIel, B. G., Da Silva, R. J., Ratkovski, G. P., & De Melo, C. P. (2021). (Maghemite/Chitosan/Polypyrrole) nanocomposites for the efficient removal of Cr (VI) from aqueous media. *Journal of Environmental Chemical Engineering*, 9(1).
124. Abdelbasir, S. M., El-Shewaikh, A. M., El-Sheikh, S. M., & Ali, O. I. (2021). Novel modified chitosan nanocomposites for Co(II) ions removal from industrial wastewater. *Journal of Water Process Engineering*, 41.
125. Krishna, L. S., Soontarapa, K., Vinaykumar, Marella, R. K., & Karthik, K. (2021). Preparation of novel chitosan polymeric nanocomposite as an efficient material for the removal of Acid Blue 25 from aqueous environment. *International Journal of Biological Macromolecules*, 168, 760–768.
126. Mostafa, M. H., Elsayy, M. A., Darwish, M. S. A., Hussein, L. I., & Abdaleem, A. H. (2020b). Microwave-assisted preparation of Chitosan/ZnO nanocomposite and its application in dye removal. *Materials Chemistry and Physics*, 248.
127. Shehap, A. M., Nasr, R. A., Mahfouz, M. A., & Ismail, A. M. (2021). Preparation and characterizations of high doping chitosan/MMT nanocomposites

- films for removing iron from ground water. *Journal of Environmental Chemical Engineering*, 9.
128. Rashid, S., Shen, C., Yang, J., Liu, J., & Li, J. (2018). Preparation and properties of chitosan–metal complex: Some factors influencing the adsorption capacity for dyes in aqueous solution. *Journal of Environmental Sciences*, 66, 301–309
  129. da Silva, J. C. S., França, D. B., Rodrigues, F., Oliveira, D. M., Trigueiro, P., Silva Filho, E. C., & Fonseca, M. G. (2021). What happens when chitosan meets bentonite under microwave-assisted conditions? Clay-based hybrid nanocomposites for dye adsorption. *Colloids and Surfaces A: Physicochemical and Engineering Aspects*, 609.
  130. Krishna, L. S., Soontarapa, K., Vinaykumar, Marella, R. K., & Karthik, K. (2021). Preparation of novel chitosan polymeric nanocomposite as an efficient material for the removal of Acid Blue 25 from aqueous environment. *International Journal of Biological Macromolecules*, 168, 760–768.
  131. Ashassi-Sorkhabi, H., & Kazempour, A. (2020). Chitosan, its derivatives and composites with superior potentials for the corrosion protection of steel alloys: A comprehensive review. *Carbohydrate Polymers*, 237, Article 116110.
  132. Huang, C., & Peng, B. (2021). Photocatalytic degradation of patulin in apple juice based on nitrogen-doped chitosan-TiO<sub>2</sub> nanocomposite prepared by a new approach. *Lwt*, 140.
  133. Midya, L., Sarkar, A. N., Das, R., Maity, A., & Pal, S. (2020). Crosslinked chitosan embedded TiO<sub>2</sub> NPs and carbon dots-based nanocomposite: An excellent photocatalyst under sunlight irradiation. *International Journal of Biological Macromolecules*, 164, 3676–3686
  134. Alimard, P. (2019). Fabrication and kinetic study of Nd-Ce doped Fe<sub>3</sub>O<sub>4</sub>-chitosan nanocomposite as catalyst in Fenton dye degradation. *Polyhedron*, 171, 98–107.
  135. Vunain, E., Mishra, A. K., & Mamba, B. B. (2016). Dendrimers, mesoporous silicas and chitosan-based nanosorbents for the removal of heavy-metal ions: A review. *International Journal of Biological Macromolecules*, 86, 570–586.
  136. Gupta, N., Kushwaha, A. K., & Chattopadhyaya, M. C. (2012). Adsorptive removal of Pb<sup>2+</sup>, Co<sup>2+</sup> and Ni<sup>2+</sup> by hydroxyapatite/chitosan composite from

- aqueous solution. *Journal of the Taiwan Institute of Chemical Engineers*, 43(1), 125–131
137. Zhu, F., Zheng, Y. M., Zhang, B. G., & Dai, Y. R. (2021). A critical review on the electrospun nanofibrous membranes for the adsorption of heavy metals in water treatment. *Journal of Hazardous Materials*, 401, 1–22.
  138. GLofrano, M Carotenuto, G Libralato, RFDomingos, A Markus, L Dini, RK Gautam, D Baldantoni, M. Rossi, SK Sharma, MCChattopadhyaya, MGiugni, SMeric: ‘Polymer functionalized nanocomposites for metals removal from water and wastewater: An overview’, *Water Res*, 2016; 92:22–37.
  139. MA Shannon, PW Bohn, M Elimelech, JG Georgiadis, BJ Marinas, AM Mayes: ‘Science and technology for water purification in the coming decades’, *Nature*, 2008; 452: 301–310.
  140. X Qu, PJ Alvarez, Q Li, Applications of nanotechnology in water and wastewater treatment, *Water Res*, 2013; 47:3931–3946.
  141. NC Joshi, A Rajput, Sorption applications of nanomaterials for the removal of heavy metals from water and waste waters, *International Journal for Research in Engineering Application & Management*, 2019;4:522-55.
  142. Ray, S.S.: Polylactide-Based Bionanocomposites: A Promising Class of Hybrid Materials. *Acc. Chem. Res.* 45, 1710 (2012).
  143. Liff, S.M., Kumar, N., McKinley, G.H.: High-performance elastomeric nanocomposites via solvent-exchange processing. *Nat. Mater.* 6, 76 (2007).
  144. Gaharwar, A.K., Dammu, S.A., Canter, J.M., Wu, C.-J., Schmidt, G.: Highly Extensible, Tough, and Elastomeric Nanocomposite Hydrogels from Poly(ethylene glycol) and Hydroxyapatite Nanoparticles. *Biomacromolecules* 12, 1641 (2011).
  145. Paul, D.R., Robeson, L.M.: Polymer nanotechnology: nanocomposites. *Polymer* 49, 3187 (2008).
  146. Goenka, S., Sant, V., Shilpa, S.: Graphene-based nanomaterials for drug delivery and tissue engineering. *J. Control. Release* 173, 75 (2014)
  147. Mitragotri, S., Lahann, J.: *Nat. Mater.* 8, 15 (2009).
  148. Satarkar, N.S., Biswal, D., Hilt, J.Z.: Hydrogel nanocomposites: a review of applications as remote-controlled biomaterials. *Soft Matter* 6, 2364 (2010).
  149. Vaia, R., Baur, J.: Adaptive Composites. *Science* 319, 420 (2008).

150. Dundigalla, A., Lin-Gibson, S., Ferreira, V., Malwitz, M.M., Schmidt, G.: Unusual Multilayered Structures in Poly(ethylene oxide)/Laponite Nanocomposite Films. *Macromol. Rapid Commun.* 26, 143 (2005).
151. Alayoglu S, Rosenberg DJ, Ahmed M. Hydrothermal synthesis and characterization under dynamic conditions of cobalt oxide nanoparticles supported over magnesium oxide nano-plates. *Dalton Transactions.* 2016.
152. Pecquenard B, Zavalij PY, Whittingham MS. Hydrothermal synthesis and characterization of a new aluminium vanadium oxide hydroxide  $Al_2(OH)_3(VO)_4$ . *Journal of Materials Chemistry.* 1998;8(5):1255-8.
153. Li G, Ciston S, Saponjic ZV, Chen L, Dimitrijevic NM, Rajh T, et al. Synthesizing mixed-phase  $TiO_2$  nanocomposites using a hydrothermal method for photo-oxidation and photoreduction applications. *Journal of Catalysis.* 2008;253(1):105-10.
154. Guglielmi M, Kickelbick G, Martucci A. *Sol-Gel Nanocomposites:* Springer New York; 2014.
155. Jeon H-J, Yi S-C, Oh S-G. Preparation and antibacterial effects of Ag-SiO<sub>2</sub> thin films by sol-gel method. *Biomaterials.* 2003;24(27):4921-8.
156. Lee J-H, Park B-O. Transparent conducting ZnO: Al, In and Sn thin films deposited by the sol-gel method. *Thin Solid Films.* 2003;426(1):94-9.
157. Chen D-H, He X-R. Synthesis of nickel ferrite nanoparticles by sol-gel method. *Materials Research Bulletin.* 2001;36(7):1369-77.
158. Ennas G, Musinu A, Piccaluga G, Zedda D, Gatteschi D, Sangregorio C, et al. Characterization of iron oxide nanoparticles in an Fe<sub>2</sub>O<sub>3</sub>-SiO<sub>2</sub> composite prepared by a sol-gel method. *Chemistry of Materials.* 1998;10(2):495-502.
159. Nazir R, Mazhar M, Akhtar MJ, Shah MR, Khan NA, Nadeem M, et al. Superparamagnetic bimetallic iron-palladium nanoalloy: synthesis and characterization. *Nanotechnology.* 2008;19(18):185608.
160. Chen Q, Boothroyd C, Soutar AM, Zeng XT. Sol-gel nanocoating on commercial TiO<sub>2</sub> nanopowder using ultrasound. *Journal of sol-gel science and technology.* 2010;53(1):115-20.
161. Benvenuti EV, Moro CC, Costa TM, Gallas MR. Silica based hybrid materials obtained by the sol-gel method. *Química Nova.* 2009;32(7):1926-33.

162. Akhtar MS, Khan MA, Jeon MS, Yang OB. Controlled synthesis of various ZnO nanostructured materials by capping agents-assisted hydrothermal method for dye-sensitized solar cells. *Electrochimica Acta*. 2008;53(27):7869-74.
163. Byrappa K, Yoshimura M. *Handbook of Hydrothermal Technology*: Elsevier Science; 2012.
164. Köseoğlu Y, Bay M, Tan M, Baykal A, Sözeri H, Topkaya R, et al. Magnetic and dielectric properties of  $\text{Mn}_0.2\text{Ni}_0.8\text{Fe}_2\text{O}_4$  nanoparticles synthesized by PEG-assisted hydrothermal method. *Journal of Nanoparticle Research*. 2011;13(5):2235-44.
165. Wang WW, Zhu YJ, Yang LX. ZnO–SnO<sub>2</sub> hollow spheres and hierarchical nanosheets: hydrothermal preparation, formation mechanism, and photocatalytic properties. *Advanced Functional Materials*. 2007;17(1):59-64.
166. Wang Y, Xu G, Ren Z, Wei X, Weng W, Du P, et al. Mineralizer-Assisted Hydrothermal Synthesis and Characterization of BiFeO<sub>3</sub> Nanoparticles. *Journal of the American Ceramic Society*. 2007;90(8):2615-7.
167. Zhang H, Chen G. Potent antibacterial activities of Ag/TiO<sub>2</sub> nanocomposite powders synthesized by a one-pot sol–gel method. *Environmental science & technology*. 2009;43(8):2905-10.
168. Azari A, Kalantary RR, Ghanizadeh G, Kakavandi B, Farzadkia M, Ahmadi E. Iron–silver oxide nanoadsorbent synthesized by co-precipitation process for fluoride removal from aqueous solution and its adsorption mechanism. *RSC Advances*. 2015;5(106):87377-91.